

DRACO[®] SERIES BS710, BS720, BS730


INSTALLATION INSTRUCTIONS




Beluce Canada Inc.
3900 14th Avenue
Markham, Ontario L3R 4R3
P: (905) 948-9500
F: (905) 948-8673
www.Beghelliuce.com

DRACO® SERIES


- BS710
- BS720
- BS730




DRACO 710 12"

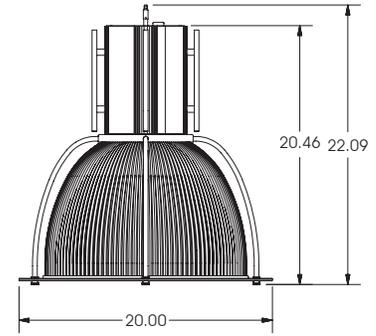


DRACO 710 16"




DRACO 720 12"

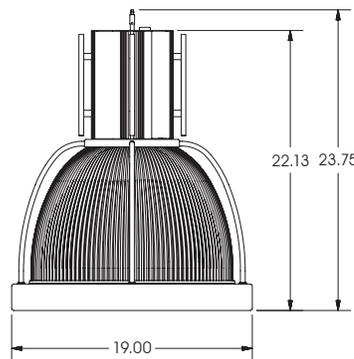

DRACO 720 16"



DRACO 730 16"



DRACO 730 12"

IMPORTANT SAFEGUARDS

When using electrical equipment, basic safety precautions should always be followed including the following:

1. Make sure the power is OFF before installing the unit.
2. Do not use outdoors.
3. Do not let power cords touch hot surface.
4. Do not mount near gas or electric heaters.
5. The use of accessory equipment not recommended by Beluce Canada Inc., may cause an unsafe condition, and will effectively void the unit's warranty.
6. Servicing of this equipment should be performed by qualified service personnel.
7. Do not use this equipment for anything other than it's intended purpose.

SAVE THESE INSTRUCTIONS!

WARNING


No user serviceable parts. Refer service to a qualified service technician. Read instructions prior to installing and/or operating this device. Installation should be performed by a licensed electrician/installer in accordance with local codes.

First make sure power is turned off!

1. Prepare and assemble CANOPY KIT.
2. Securely mount the fixture hardware provided as illustrated in the instructions.
3. Prepare fixture for wiring.
4. Connect AC supply and ground as labeled on the provided wire leads. Insulate unused wire! **CAUTION! Failure to insulate unused wire may result in a shock hazard or unsafe condition as well as equipment failure.** Route wires and secure them in place.
5. Turn on AC.

SAVE THESE INSTRUCTIONS!

Note: instructions apply to all models of Draco Series: BS710, BS720 and BS730 configurations.


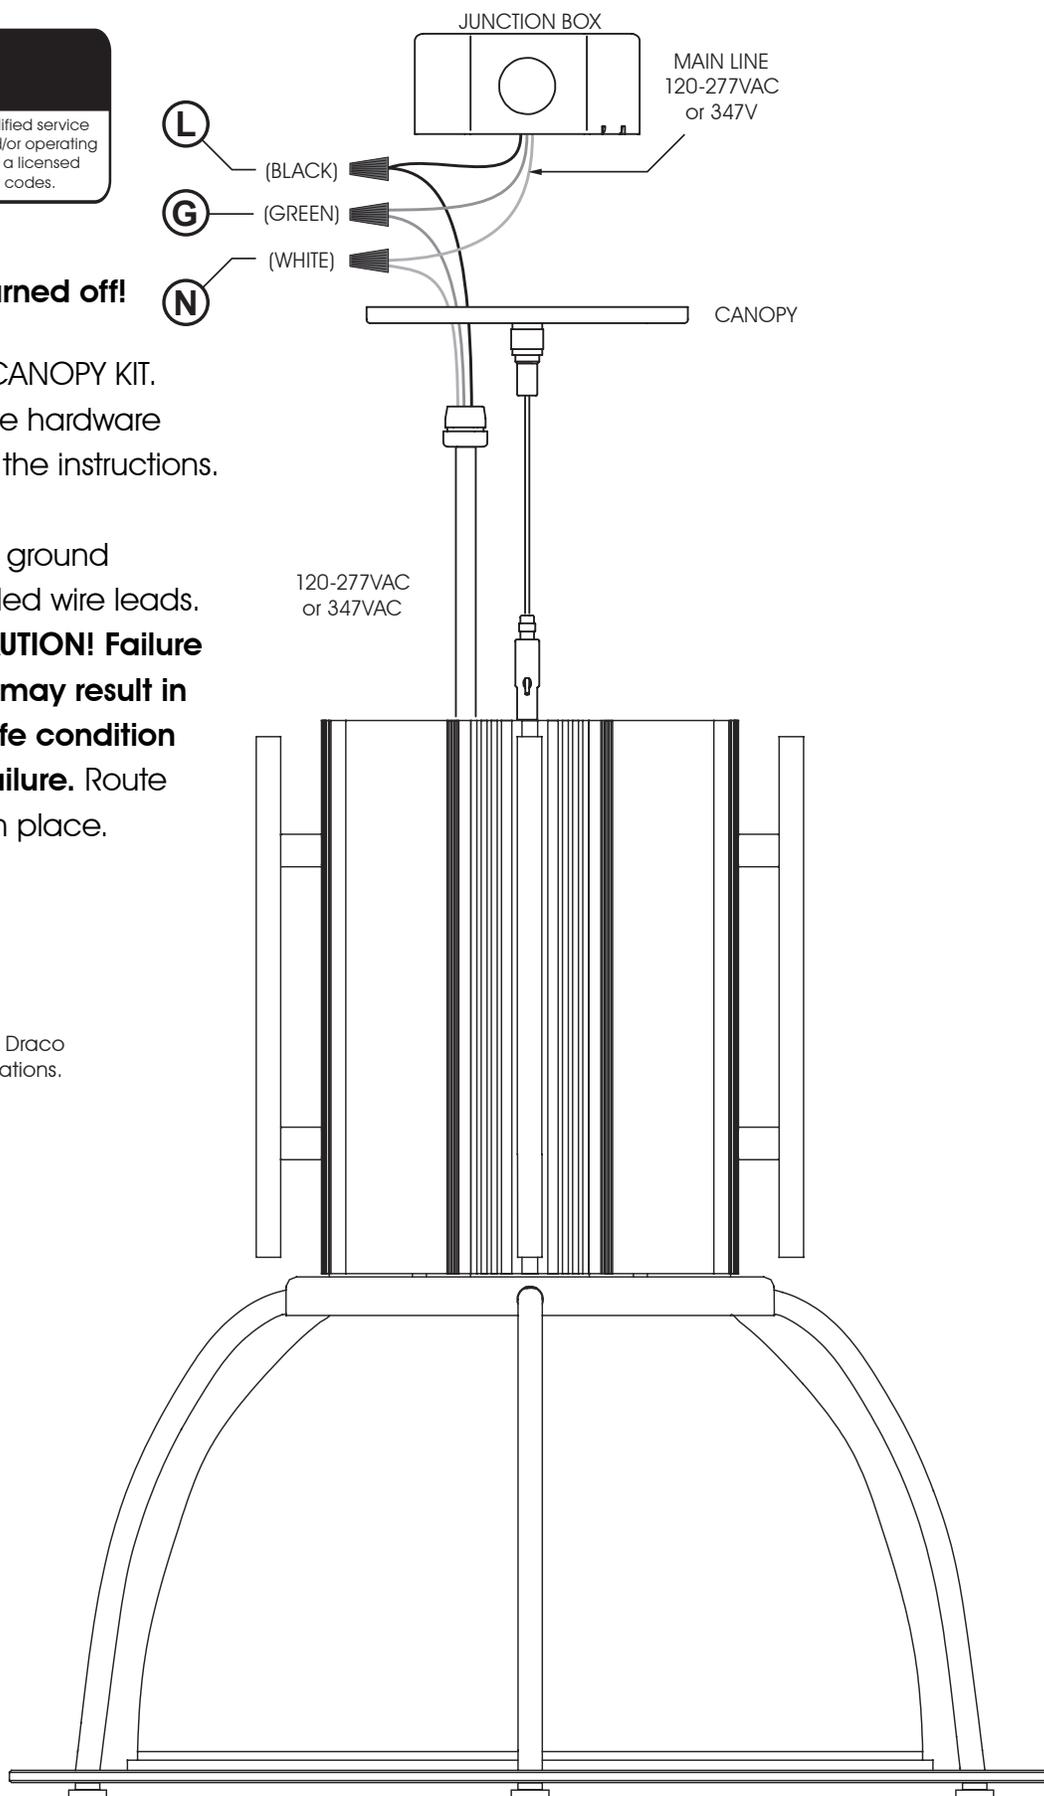


DIMMING WITH ON/OFF CONTROL WALLBOX WIRING DIAGRAM USING RELAY

0-10V WALL DIMMER (provided by others)

For switch wiring details, please refer to manufacturers installation guide.

NOTE: WIRE LOCATIONS WILL VARY. REFERENCE WIRES BY COLOR NOT LOCATION

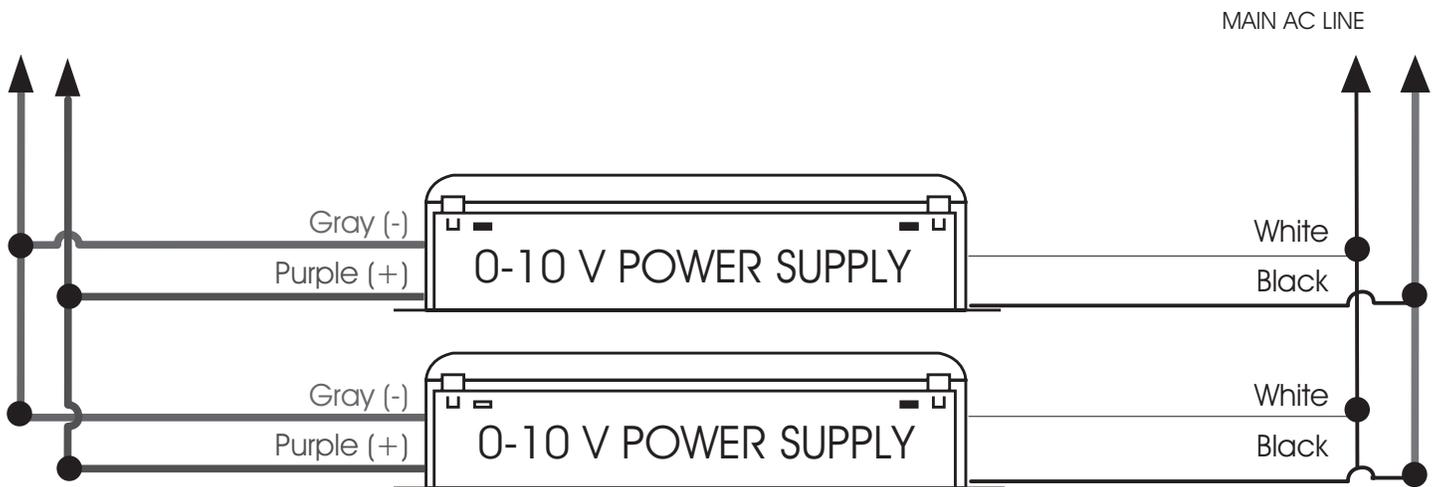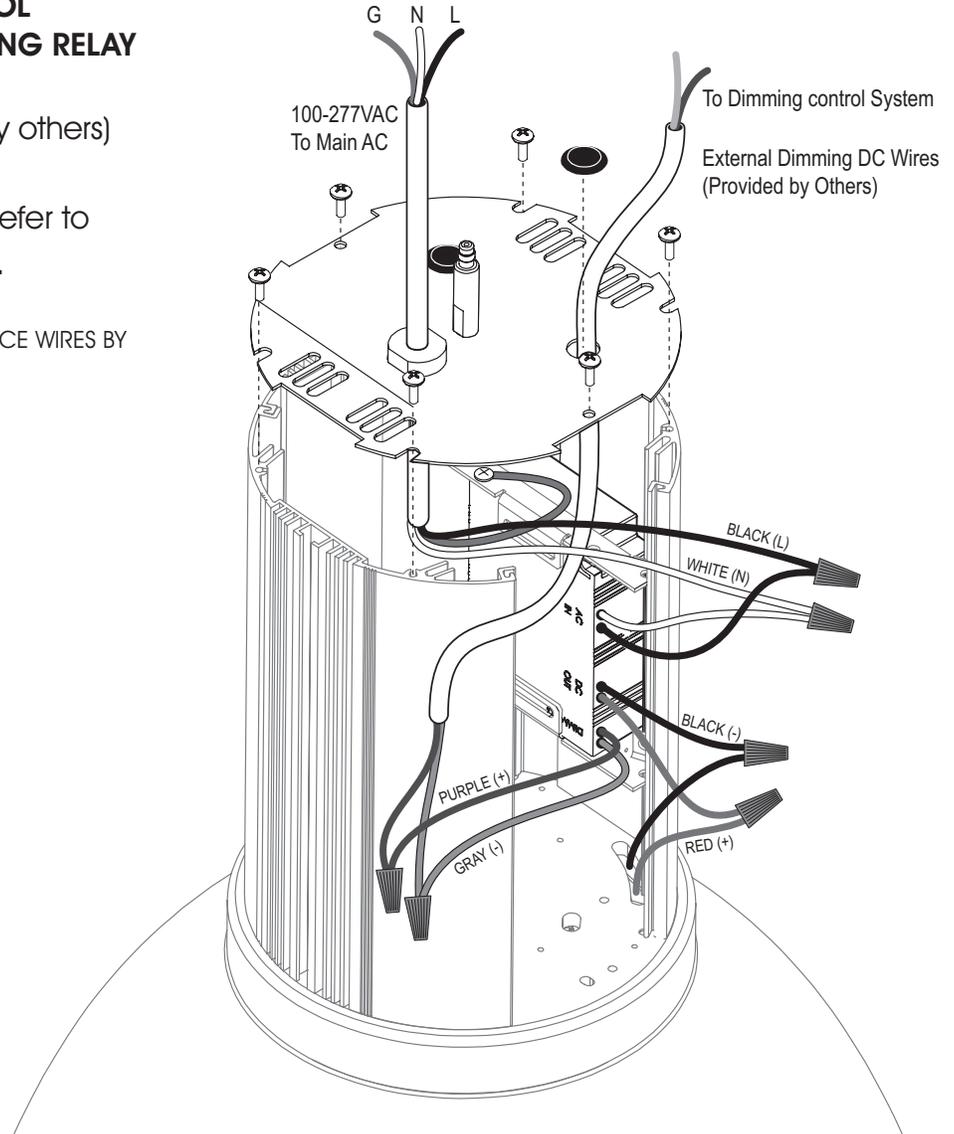

The Draco Series is designed to be suspended.


AIRCRAFT CABLE KIT INSTALLATION INSTRUCTIONS

1. Install the ¼-20 screw in the cross bar.
2. Install cross bar to junction box.
3. Assemble power cord and strain relief through the canopy hole.
4. Slip the aircraft cable in the coupler.
5. Depress the lock ring on the cable gripper.
6. Install the cable in the cable gripper (note the lock ring must be loose).
7. Adjust to the appropriate height and release the lock ring on the gripper.
8. Place the canopy over the top of the coupler and install on the ¼-20 screw in the cross bar (by loosening the lock ring on the coupler the canopy will move up and down the cable).
9. Connect the power cable in accordance to all codes and labels.
10. Move the canopy in place and tighten the lock ring on the coupler to the desired position.
11. Install and trim wire ties as desired.


PENDANT KIT INSTALLATION INSTRUCTIONS:

1. Connect all wiring in the j-box (provided by others) in accordance with all codes and labels.
2. Install cross bar to junction box.
3. Fasten (1) lock nut on end of stem.
4. Fasten stem into cross bar.
5. Feed wires through stem.
6. Attach cross bar assembly to j-box.
7. Slip canopy (flange up) onto stem.
8. Slide slip ring up stem and use set screw to hold in place.
9. Attach stem to fixture using one lock nut on top.
10. Adjust slip ring to tighten canopy to ceiling or desired position.

AIRCRAFT CABLE MOUNTING

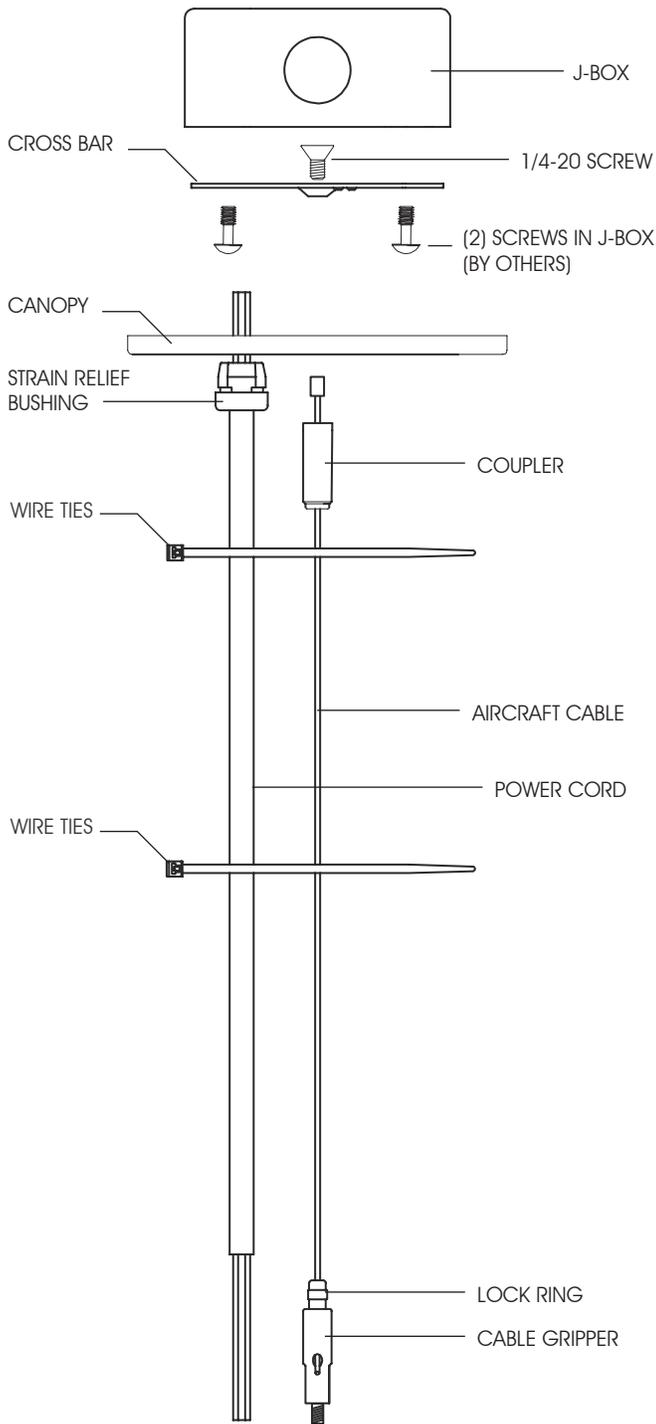


PENDANT MOUNTING

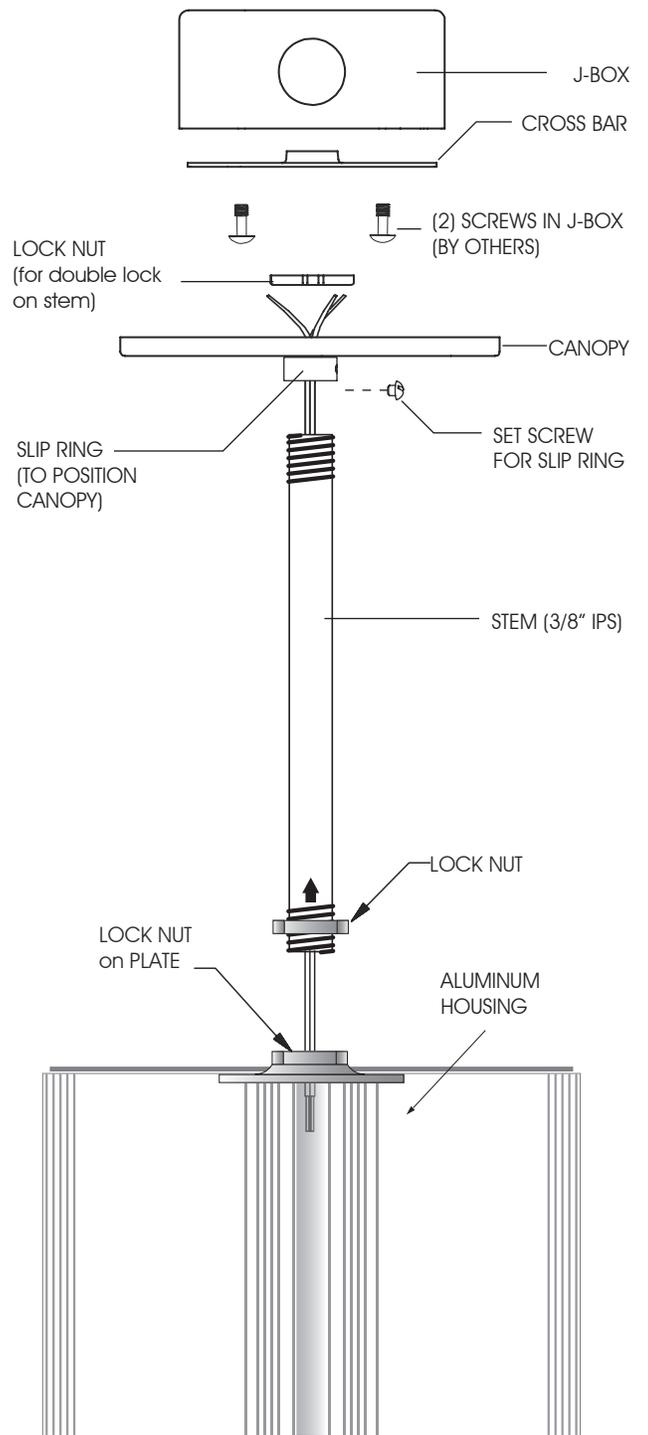


SWIVEL CANOPY KIT

- 40 degree range
- 3/8" NPT painted steel stem
- 75 Lb. maximum weight

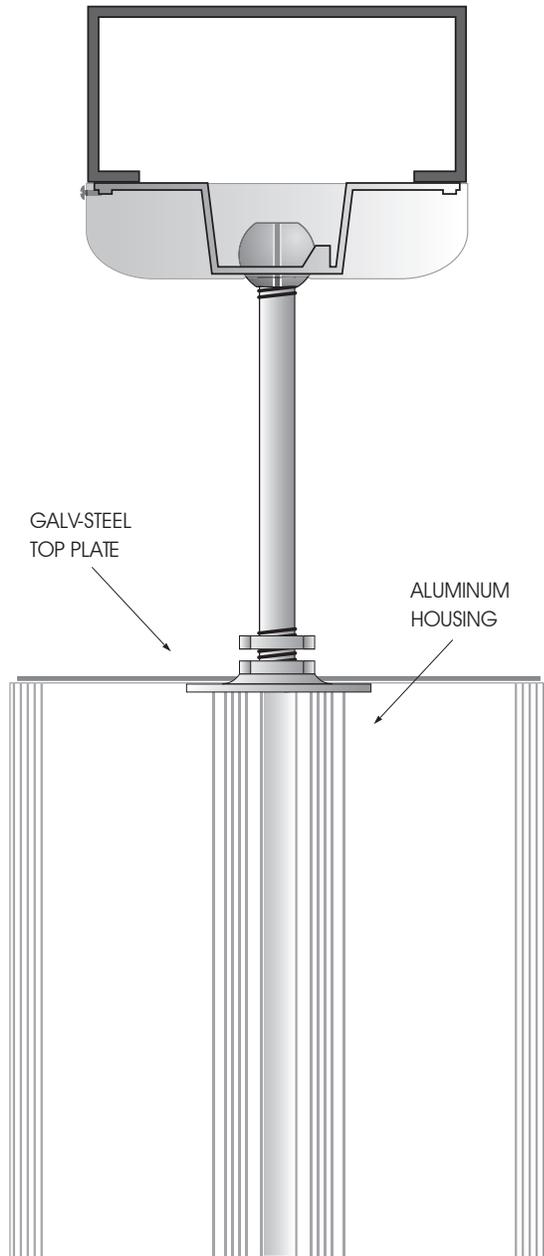

ASSEMBLY VIEW

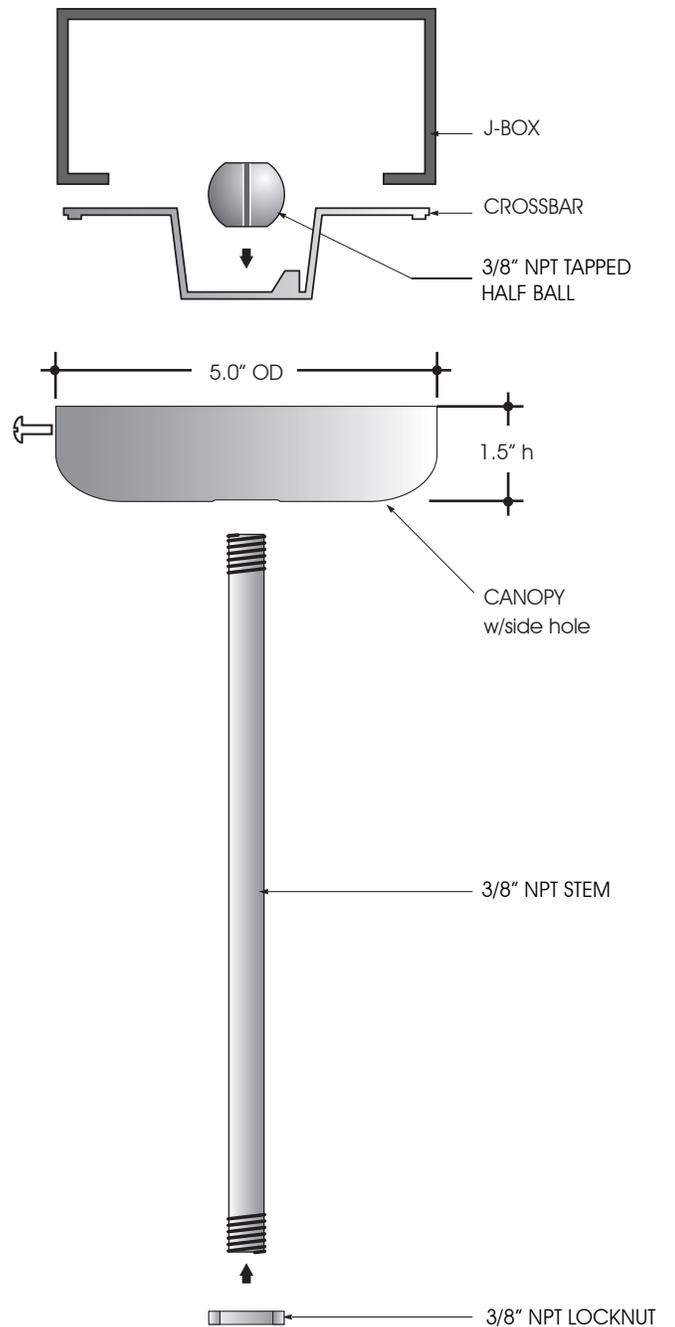

Beluce Canada Inc.
3900 14th Avenue
Markham, Ontario L3R 4R3
P: (905) 948-9500
F: (905) 948-8673
www.BeghelliCanada.com