


SPADA[®]


SPA SERIES

EACH MODEL NUMBER CONSISTS OF THE FOLLOWING: SERIES / WATTAGE / LENGTH / LED COLOUR TEMP. / INPUT

SERIES:	SPA
WATTAGE / LENGTH:	40W / 4FT
COLOUR TEMP.:	4000K
INPUT:	120V-277V

Operating Temp. -20° C to $+40^{\circ}$ C Rated IP65

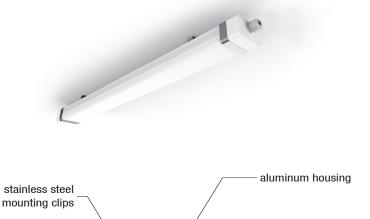

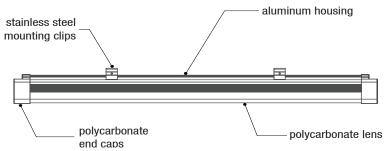

IMPORTANT SAFEGUARDS


When using electrical equipment, basic safety precautions should always be followed including the following:

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

- 1. Do not let power cords touch hot surfaces.
- 2. Do not mount near gas or electric heaters.
- 3. Equipment should be mounted in locations and at heights where unauthorized personnel will not readily subject it to tampering.
- 4. The use of accessory equipment not recommended by Beluce Canada Inc., may cause an unsafe condition, and will void the warranty.
- 5. Do not use this equipment for other than its intended purpose.
- 6. Servicing of this equipment should be performed by qualified service personnel.

THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE.









First make sure power is turned off!

- 1. Install each mounting system as indicated.
- 2. Connect wires leads from main AC following wire labels.

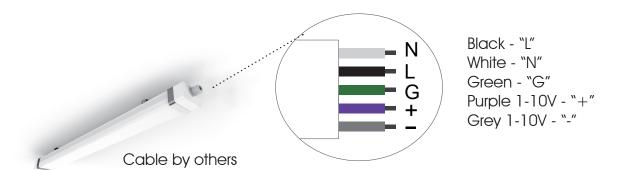

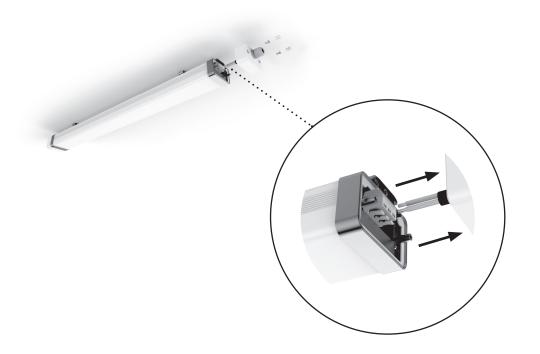



Terminal Block

NOTF:

- Line Cord not included.
- Remove two plastic covers to access the two screws to release the end cap, for line cord installation.
- Allen key required.







SURFACE/CEILING MOUNT


- 1. Fasten and secure mounting clips with mounting screws.
- 2. Fasten fixture to mounting clips as indicated.

Fixture will snap in place.








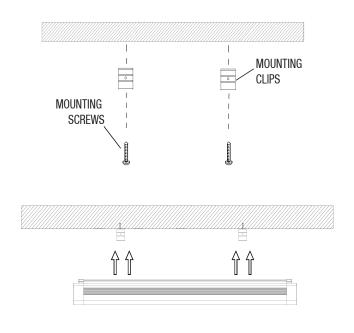


COMPLETED ASSEMBLY

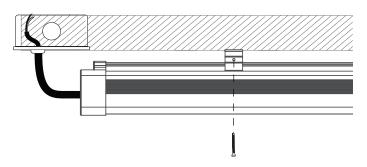


AIRCRAFT CABLE MOUNT


- 1. Secure steel aircraft cables to the ceiling.
- 2. Fasten and secure mounting clips to the Spada®.
- 3. Secure the cable gripper to the mounting clips.
- 4. Connect and secure the steel aircraft cable to the gripper and adjust length accordingly.

COMPLETED ASSEMBLY

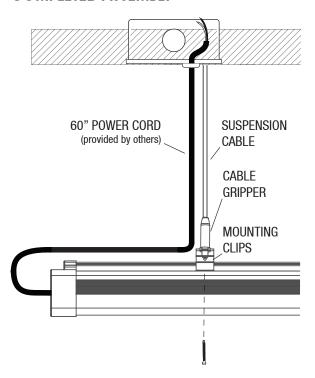



CHAIN MOUNT



COMPLETED ASSEMBLY