

ILLUMINA

BS111

FLUORESCENT (T5)



4'

Wet/IP65



Surface Luminaire

Application: Illumina™ BS111T5 is a high performance, single lamp luminaire that has been designed to offer an efficient solution to more traditional designs. The four foot version is easily installed. The three piece design snaps together without the need of any tools. The Illumina™ BS111T5 weighs a mere 6lbs. This versatile luminaire is constructed from 100% polycarbonate material and incorporates stainless steel hardware. The liquid silicon gasketing effectively seals the unit from the environment. Wet location / IP65 rated, the Illumina™ BS111T5 is ideal for breezeways, parking decks, service corridors and lowbay installations.

Type: _____

Project: _____

CONFIGURE:

a	MODEL	b	LENGTH	c	OPERATION	d	LAMP	e	INPUT	e	OPTIONS
	BS111T5 <i>Illumina™ BS111 T5 series</i>		4 4 foot		HT AC only SA AC & Emergency		128W 1x28W T5 NOTE: lamp(s) included only in 2ft version.		120V 277V 120/277V 347V		SS stainless steel clips AC aviation cable PK pendant kit FP inline fuse protection NOTE: (AC & PK) length to be specified.
	MODEL a		LENGTH b		OPERATION c		LAMP d		INPUT e		OPTIONS f
	BS111T5										

Housing: 100% UV stabilized polycarbonate material, integrated liquid silicone perimeter gasket with memory retention, recessed stainless steel mounting brackets.

Reflector: Single parabolic high emission reflector. 94% reflectancy vacuum metalized finish. Direct mount reflector configuration supports all electrical components.

Diffuser: High performance diffuser. Complete light emission (CLE) technology. Rubberized polycarbonate and acrylic to optimize durability and clarity.



Lamp/socket: Two (2) T5 ratchet type sockets with Beghelli T5 adaptor extenders.

Mounting: Surface mount configuration as standard. Optional **(AC)** aviation cable, adjustable and **(PK)** pendant mounting are available. Required mounting height to be specified.

Power Line / Feed: 3-wire, solid type 18awg, pre-stripped 12" leads for quick in-field connection with integrated tool free, hot load disconnect feature.

Weight: 6 lbs. / 2.721 kilo.

Beghelli strives to continually offer the highest quality, technically advanced, performance oriented products available. We reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function or performance of the product. Technical specifications that appear on www.beghelli.com supersede all other versions existing in print or electronic form.

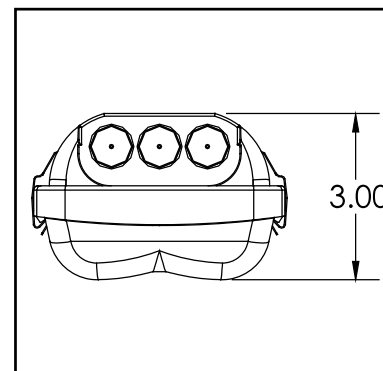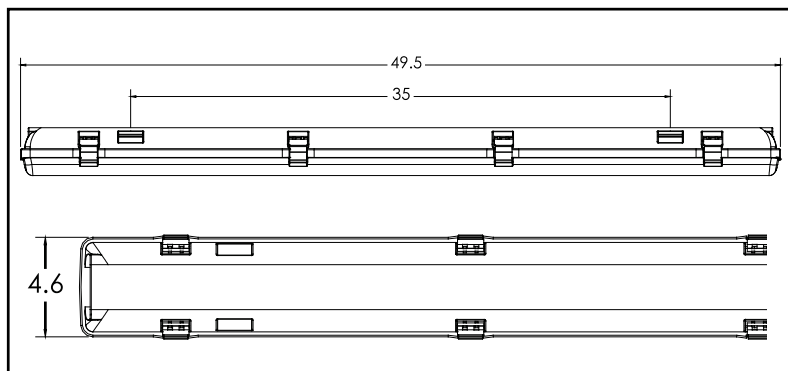

ILLUMINA

Beghelli

138 www.beghelli.com

ILLUMINA BS111

FLUORESCENT (T5HO)



4'

Wet/IP65



Surface Luminaire

Application: Illumina™ BS111T5HO is a high performance, single lamp luminaire that has been designed to offer an efficient solution to more traditional designs. The four foot version is easily installed. The three piece design snaps together without the need of any tools. The Illumina™ BS111T5HO weighs a mere 6lbs. This versatile luminaire is constructed from 100% polycarbonate material and incorporates stainless steel hardware. The liquid silicon gasketing effectively seals the unit from the environment. Wet location / IP65 rated, the Illumina™ BS111T5HO is ideal for breezeways, parking decks, service corridors and lowbay installations.

Type: _____

Project: _____

CONFIGURE:

a	b	c	d	e	e
MODEL	LENGTH	OPERATION	LAMP(S)	INPUT	OPTIONS
BS111T5HO <i>Illumina™ BS111T5HO series</i>	4 4 foot	HT AC only SA AC & Emergency NOTE: 1300 lumen output (SA)	154W 1x54W T5HO NOTE: lamp(s) included only in 2ft version.	120V 277V 120/277V 347V	SS stainless steel clips AC aviation cable PK pendant kit FP inline fuse protection NOTE: (AC & PK) length to be specified.
MODEL a	LENGTH b	OPERATION c	LAMP d	INPUT e	OPTIONS f
BS111T5HO					

Housing: 100% UV stabilized polycarbonate material, integrated liquid silicone perimeter gasket with memory retention, recessed stainless steel mounting brackets.

Reflector: Single parabolic high emission reflector. 94% reflectancy vacuum metalized finish. Direct mount reflector configuration supports all electrical components.

Diffuser: High performance diffuser. Complete light emission (CLE) technology. Rubberized polycarbonate and acrylic to optimize durability and clarity.



Lamp/socket: Two (2) T5HO ratchet type sockets with Beghelli T5HO adaptor extenders.

Mounting: Surface mount configuration as standard. Optional (AC) aviation cable, adjustable and (PK) pendant mounting are available. Required mounting height to be specified.

Power Line / Feed: 3-wire, solid type 18awg, pre-stripped 12" leads for quick in-field connection with integrated tool free, hot load disconnect feature.

Weight: 6 lbs. / 2.721 kilo.

Beghelli strives to continually offer the highest quality, technically advanced, performance oriented products available. We reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function or performance of the product. Technical specifications that appear on www.beghelli.com supersede all other versions existing in print or electronic form.

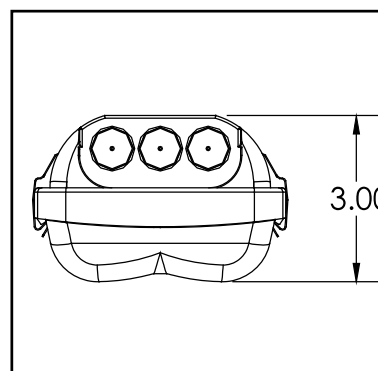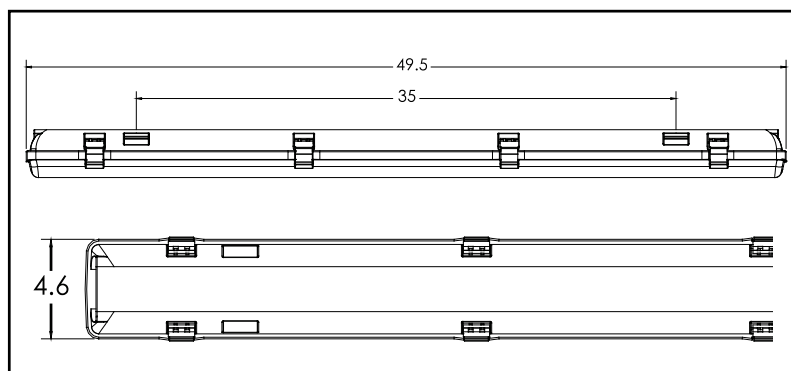

ILLUMINA

ILLUMINA

BS1118

FLUORESCENT (T8)



4'

Wet/IP65



Surface Luminaire

Application: Illumina™ BS1118 is a high efficiency, single lamp luminaire that has been designed to offer an alternate solution to more traditional designs. The four foot version is easily installed. The three piece design snaps together without the need of any tools. The Illumina™ BS1118 weighs a mere 6lbs. This versatile luminaire is constructed from 100% polycarbonate material and incorporates stainless steel hardware. The liquid silicon gasketing effectively seals the unit from the environment. Wet location / IP65 rated, the Illumina™ BS1118 is ideal for breezeways, parking decks, service corridors and lowbay installations.

Type: _____

Project: _____

CONFIGURE:

a	MODEL	b	LENGTH	c	OPERATION	d	LAMP(S)	e	INPUT	f	OPTIONS
	BS1118 <i>Illumina™ BS1118 series</i>	4 4 foot		HT AC only SA AC & Emergency		132W 1x32W T8		120V 277V 120/277V 347V		SS stainless steel clips AC aviation cable PK pendant kit FP inline fuse protection	
				NOTE: 700 lumen output (SA)		NOTE: lamp(s) included only in 2ft version.				NOTE: (AC & PK) length to be specified.	
	MODEL a	LENGTH b		OPERATION c		LAMP d		INPUT e		OPTIONS f	
	BS1118										

Housing: 100% UV stabilized polycarbonate material, integrated liquid silicone perimeter gasket with memory retention, recessed stainless steel mounting brackets.

Reflector: Single parabolic high emission reflector. 94% reflectancy vacuum metalized finish. Direct mount reflector configuration supports all electrical components.

Diffuser: High performance diffuser. Complete light emission (CLE) technology. Rubberized polycarbonate and acrylic to optimize durability and clarity.



Lamp/socket: Two (2) T8 ratchet type sockets.

Mounting: Surface mount configuration as standard. Optional **(AC)** aviation cable, adjustable and **(PK)** pendant mounting are available. Required mounting height to be specified.

Power Line / Feed: 3-wire, solid type 18awg, pre-stripped 12" leads for quick in-field connection with integrated tool free, hot load disconnect feature.

Weight: 6 lbs. / 2.721 kilo.

Beghelli strives to continually offer the highest quality, technically advanced, performance oriented products available. We reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function or performance of the product. Technical specifications that appear on www.beghelli.com supersede all other versions existing in print or electronic form.

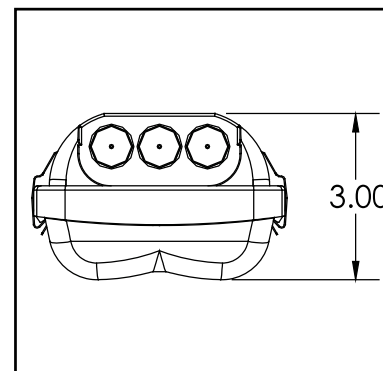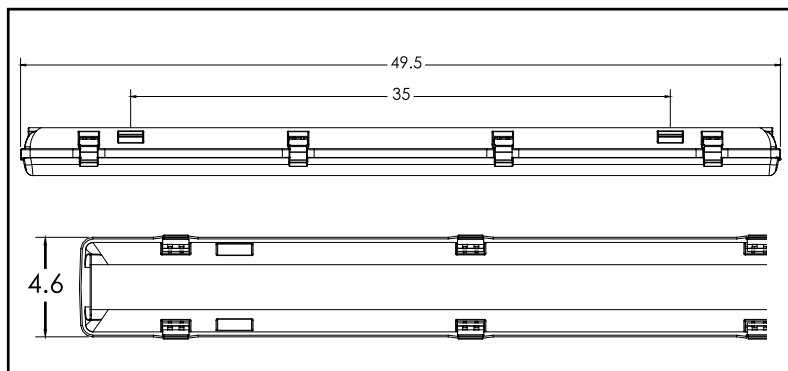

ILLUMINA

Beghelli

140 www.beghelli.com