

Guida Combo RM Surface/Recessed Edge-lit Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____



RUNNING MAN SIGNS

EXTERNAL SPECIFICATIONS

The **GUIDA** series housing backbox is constructed from durable 20 gauge steel. The acrylic faceplate is available in both single face or double face versions. Recessed versions are supplied standard with a white, baked powder coat die-cast aluminum trim plate. Available in custom epoxy-based powder coat finishes or alternate metal finishes (please specify). External LED monitor light and test switch are standard.

LAMP FEATURES

The **GUIDA** combination series is supplied with two [2] MR16 halogen or LED lamps. Lamp assemblies are fully adjustable and can be rotated and angled to provide exact aiming.

ELECTRICAL SPECIFICATIONS

The **GUIDA** series is configured with high-output LED light source in 6, 12 or 24VDC backup voltages. Standard versions use a valve regulated lead-acid battery to provide emergency lighting as specified per unit. Standard with 120/347VAC input. All versions are CSA 22.2 No. 141-15 approved.

BATTERY TECHNOLOGY

The **GUIDA** combination series is designed with a maintenance free, valve regulated lead-acid battery providing emergency lighting duration as specified per unit. Ni-Cd batteries are optional. Recharge time of the battery is twenty-four [24] hours. Operating temperature is +40°C and the minimum is +10°C.

ORDERING INFORMATION


Series	Volts/Watts	Light Source	Face #	Lamp	Pictogram	Options
GD-RM	See model rating guide	L (LED)	1 (Single) *2 (Double)	See lamp guide	OLR (Universal pictograms)	NC (Ni-Cd Batteries)
					O (No indicators)	SC (surface ceiling)
					L (Left indicator)	AT (Auto-test, SP only)
					R (Right indicator)	CC (Custom colour - specify)
					D (Down indicator)	BA (Brushed aluminum finish)
					U (Up indicator)	SW (Special wording - specify)
					UR (45° up right)	TD (Time Delay - with AT)
					DR (45° down right)	**FAI (Fire alarm interface - specify)
					UL (45° up left)	SW-OL (RM no indicator, left)
					DL (45° down left)	

NOTE: *Two pictograms or OLR must be specified *Specify open/closed/6-24 VAC


EXAMPLE: GD-RM-12V 72W-L-1-D

DESCRIPTION: Guida combo running man, 12V, 72W, LED, single face, pictogram with down indicator

DIMENSIONS (MM, IN.)

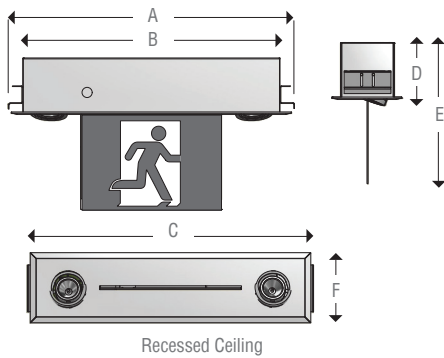

Recessed Ceiling

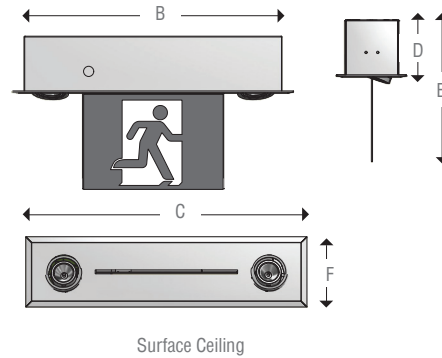

Surface Ceiling

Model	A	B	C	D	E	F
Rec. Ceiling	24 1/2" (622mm)	22" (559mm)	24" (601mm)	4 5/8" (118mm)	12 1/8" (308mm)	6" (152mm)
Surf. Ceiling		22" (559mm)	24" (601mm)	4 5/8" (118mm)	12 1/8" (308mm)	6" (152mm)

MODEL RATING GUIDE

Model	Voltage (output)	Wattage Rating	
		30 mins	120 mins
GD-RM-6-36	6	36	10
GD-RM-6-50	6	50	15
GD-RM-6-50-NC	6	50	18
GD-RM-6-80	6	80	24
GD-RM-6-90	6	90	27
GD-RM-6-100-NC	6	100	35
GD-RM-6-160	6	160	48
GD-RM-6-180-NC	6	180	60
GD-RM-12-36	12	36	10
GD-RM-12-72	12	72	22
GD-RM-12-90	12	90	27
GD-RM-12-100-NC	12	100	35
GD-RM-12-120	12	120	36
GD-RM-12-150	12	150	45
GD-RM-12-200-NC	12	200	65
GD-RM-24-144	24	144	43
GD-RM-24-180	24	180	54
GD-RM-24-200-NC	24	200	65

LAMP SELECTION

	6V	12V	24V
MR16	N/A	20, 35, 50W	N/A
MR16 LED	5, 7W	2, 5, 7W	5, 7W

INSTALLATION

The **GUIDA** is suitable for recessed ceiling mounting or surface ceiling mounting. Suitable for indoor installations.

FACE OPTIONS

When ordering a single face, choose one pictogram option. When ordering a double face, choose 2 pictogram options.

CHARGER SPECIFICATIONS

The **GUIDA** combination series charger is a fully automatic current limited charger with solid state line latched low voltage disconnect protection. All components are temperature compensated. The charger also has brownout and short circuit protection. Charger status is determined via a dual diagnostic LED display that indicates AC ON and High Charge. A push button test switch allows maintenance personnel to quickly determine the status of the exit and lamp load on AC fail.

EDGE-LIT DESIGN

The **GUIDA** series of elegantly designed edge-lit exit signs feature a clean and contemporary look. The design brings style and flexibility to your next prestigious exit sign application. The indirect LED illumination evenly lights the acrylic face with crisp, even light. The ultra thin faceplate virtually disappears once installed boldly distinguishing the path of egress. The wide variety of finishes available will ensure that the **GUIDA** can be easily matched to your decor.

MECHANICAL SPECIFICATIONS

Ceiling recessed versions are supplied standard with adjustable steel T-bar ceiling tile or drywall mounting brackets. All trim plates are made of die-cast aluminum and supplied standard with an attractive and durable white, baked powder coat finish. Faceplates for the **GUIDA** are constructed of clear, solid acrylic. Trim plates are held securely in place with two [2] torsion spring clips.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.