

Guida RM Surface/Recessed Edge-lit Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Surface or recessed,
wall or ceiling mounting

Thin-line profile

Edge-lit LED
technology



AC Only, Self-Powered
or Universal DC

Elegant curved face



ELECTRICAL SPECIFICATIONS

The **GUIDA** series is configured with high-output LED light source. Standard with 120/347VAC input and consume only 2W nominal power. Optional UDC emergency illumination is provided by the LED light source at the following wattages: 6VDC - 24VDC, 2 watts. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The **GUIDA-SP** is designed with a maintenance free, nickel-cadmium battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is less than twenty-four [24] hours.

ORDERING INFORMATION

Series	Operation	Light Source	Mounting	Face #	Pictogram	Style	Options
GD-RM	Blank (AC only)	L (LED)	RC (Recessed Ceiling)	1 (Single)	OLR (Universal pictograms)	PLUS	CC-S (Custom colour trim, sheet aluminum - specify)
	SP (Self-powered)		SC (Surface ceiling)	*2 (Double)	0 (No indicators)		CC-D (Custom colour trim, die-cast - specify)
			SW (Surface wall)		L (Left indicator)		BA (Die-cast trim brushed aluminum finish)
			RW (Recessed wall)		R (Right indicator)		SW-OL (RM no indicator, left)
			SE (Surface end)		D (Down indicator)		AT (Auto-test, SP only)
					U (Up indicator)		PK12 (12" pendant kit)
					UR (45° up right)		UDC (Universal 6 - 24VDC)
					DR (45° down right)		90SP (90 min. emergency)
					UL (45° up left)		120SP (120 min. emergency)
					DL (45° down left)		FL (Flash on AC fail)
							IF (Inverted face)
							**120VDC (Specify 2 or 4 wires)


NOTE: *Two pictograms or OLR must be specified

**With 120VAC only

EXAMPLE: GD-RM-SP-L-RC-1-PLUS-OLR

DESCRIPTION: Guida edge-lit running man, 120/347VAC input, self-powered, LED, recessed ceiling, single face, PLUS style, universal pictograms

DIMENSIONS (MM, IN.)

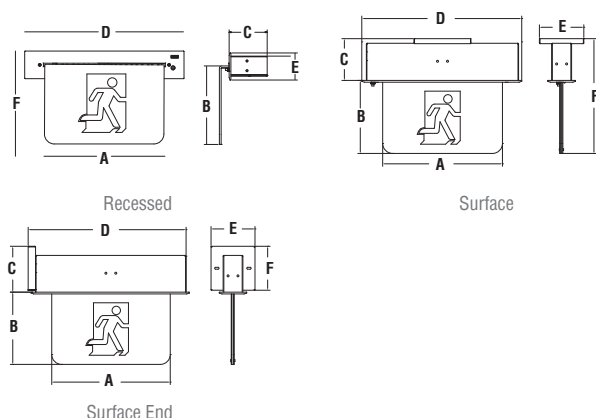

Model	A	B	C	D	E	F
Recessed	305mm 12"	203mm 8"	102mm 4"	406mm 16"	70mm 2 3/4"	238mm 9 3/8"
Surface	305mm 12"	184mm 7 1/4"	95mm 3 3/4"	406mm 16"	114mm 4 1/2"	292mm 11 1/2"
Surf. End	305mm 12"	184mm 7 1/4"	121mm 4 3/4"	413mm 16 1/4"	114mm 4 1/2"	114mm 4 1/2"

EXTERNAL SPECIFICATIONS

The **GUIDA PLUS RM** series housing backbox is constructed from durable 20 gauge steel. The acrylic faceplate is available in both single face or double face versions. The refined faceplate has gently rounded corners for a polished look. The **GUIDA PLUS** is complete with an enhanced removable thin-line trim plate with a white, baked powder coat. Available in custom powder coat finishes or alternate metal finishes and die-cast construction (please specify). External LED monitor light and test switch are standard on self-powered versions.

INTERNAL SPECIFICATIONS

AC ONLY, AC/DC and SELF-POWERED comes standard configured with high-output LED technology, 120/347VAC input. Nickel-cadmium batteries provide a minimum 30 minutes of emergency duration. Optional 90 or 120 minute duration battery is available. Solid state charger & transfer. CSA 22.2 No. 141-15 Performance Certified. **GUIDA PLUS** exits configured for AC/DC operation feature a universal 2 wire DC input; 6VDC - 24VDC.

UNIVERSAL PICTOGRAMS


The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.

FACE OPTIONS

When ordering a single face, choose one pictogram option. When ordering a double face, choose 2 pictogram options.

EDGE-LIT DESIGN

The **GUIDA PLUS** is an elegantly designed edge-lit running man sign featuring a clean and contemporary look. The design brings style and flexibility to your next prestigious sign application with stylish lines and thin profile. The indirect LED illumination evenly lights the acrylic face with crisp, even light. The wide variety of finishes and mounting configurations available will ensure that the **GUIDA PLUS** can be easily matched to your decor.



Trim and faceplate mount into backbox for quick and easy installation.

SELF-POWERED VERSIONS

The **GUIDA-SP** series is designed to operate on battery power in the event of a power failure. Both the battery and charger are completely contained within the standard enclosure. There are no external components and no alterations made to the external dimensions of the standard sign. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit.

INSTALLATION

Universal mounting pattern and key hole slots are stamped into the housing providing various mounting options. Ceiling recessed versions are supplied standard with adjustable steel T-bar ceiling tile mounting brackets. All trim plates are supplied standard with an attractive and durable white, baked powder coat finish, die-cast trims are optional. Faceplates for the **GUIDA PLUS** are constructed of clear, solid acrylic. Recessed version faceplates are held securely in place with two [2] torsion spring clips. The **GUIDA** is suitable for recessed and surface ceiling or wall mounting. Suitable for indoor installations.

BEGHELLI AUTO-TEST (AT)

The Beghelli auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. The information is communicated simply and intuitively to maintenance personnel via a single multi-colour LED. No need to memorize complex indicator protocols. No confusing array of multiple, same coloured LEDs that can be difficult to read from floor level.