

SPA

VANDAL RESISTANT LINEAR LED

Type: _____

Project: _____

Delivered Lumens:
4317 lm


Input Wattage:
40W

Efficacy:
108 lm/W

Colour Temperatures:
4000K

Projected Lumen Maintenance:
L₇₀ @ 50,000 hrs.

Full-length aluminum housing for excellent thermal management

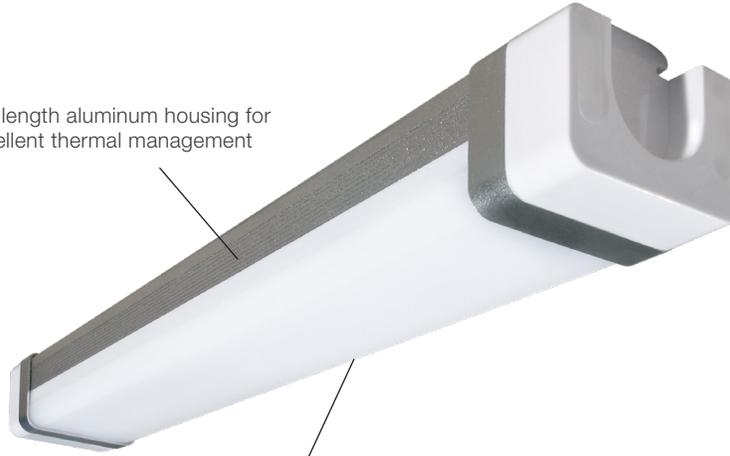

Diffuser provides maximum efficiency with minimum glare



The **SPADA®** is vandal resistant, waterproof, dust tight and corrosion resistant

Surface or suspension mount is standard

IK10 rated strength

The vandal resistant design of the **SPADA®** makes it ideal for transit, stairwells, work stations, locker rooms, schools, breezeways, public areas and manufacturing facilities.

Configurations

MODEL	LENGTH	OPERATION	COLOUR TEMP	INPUT	OPTIONS
SPA	2 (2ft)	HT (AC only)	WT40 (4000K)	120-277V	L (linkable)
	4 (4ft)				

Limited stock available, product will be discontinued once stock is depleted.

Accessories*

MOUNTING
AC ¹ (aviation cable)
CH ² (chain hang kit)

NOTE*: order separately; **NOTE!**: specify length for AC: 50", 72", 100", 150", 250", fully adjustable; **NOTE!**: brackets only, chain by others.

HOUSING:

Die-cast aluminum housing with UV stabilized polycarbonate lens and end caps. End caps are secured with tamper resistant screws. Perimeter gasket for IP66 ingress protection against dust and moisture.

ELECTRICAL:

Available in 4000K. High efficiency driver operates 100V through 277V, 50-60HZ.

Drivers used: 40W. L70 at 50,000 hours.

OPERATING TEMPERATURE:

-20°C to 40°C

POWER LINE/FEED:

60" type SJTW, two conductor, 18AWG, rated 105°C, 300V.

MOUNTING:

Surface mount configuration is standard with integrated stainless steel mounting brackets.

Other mounting options available include aviation cable (AC), and chain hang (CH). Suspension height is to be specified when ordering any suspension mount units.

DIMMING:

1-10V dimming is standard (compatible with most dimming systems, contact factory for more information).

WEIGHT:

7 lbs. / 2.8 kg.

LINKABLE CONNECTORS:

Screw type connectors and a 72" length of cable are provided with the Spada Linkable. The connectors are IP68 rated for wet locations. Maximum 8 fixtures per run.

SANITATION LISTED (SL):


Equivalent to the NSF standard 2. The **SPADA®** is ideal for use in food service equipment environments.

WARRANTY:

5 year LED warranty, see website for full warranty details.

Dimensions


MODEL	A	B	C
SPA-4	1200mm (47.2")	83mm (3.3")	63mm (2.5")

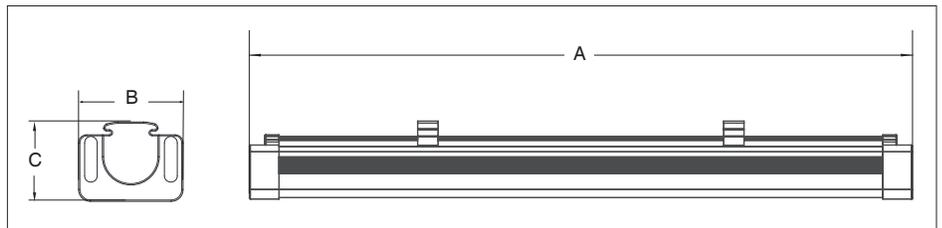

Spada®

SPA-4-HT-40W-WT40-120-277V

Luminous Intensity Distribution

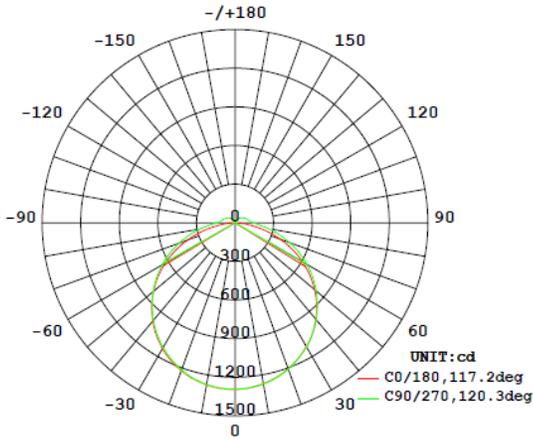

Zonal Lumen Summary

ZONE	LUMENS	% LUMINAIRE
0-20	492	11.40
0-40	1717	39.70
0-60	3066	71.00
0-90	4033	93.90
90-180	262	6.10
0-180	4296	100.00

CBCP (cd):	1293	CIE Class:	Direct
Efficiency Total:	100%	Lumen Rating:	4295
Efficacy Total:	113 lm/W	Input Wattage:	38W

Energy Chart

MODEL	LENGTH	EFFICACY	WATTAGE	LUMEN OUTPUT	CRI	*L70 HOURS
SPA-4-HT-40W-WT40-120-277V	4ft	113 lm/W	38	4296	80+	50,000

*Projected