

Uniko RM Die-cast Running Man

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____

Wall or pendant
mounting

Elegant curved
frame



Die-cast housing

Mounts away from
the wall to give the
illusion of floating



MODERN DESIGN

The **UNIKO** has a thin profile housing to give the appearance of floating as it sits off the wall. Proportion and lines were taken into careful consideration in the design of the **UNIKO** making it ideal for architectural applications.

INSTALLATION

The **UNIKO** is suitable for surface wall or pendant mounting. Double face signs must be pendant mounted. Suitable for indoor installations.

ELECTRICAL SPECIFICATIONS

The **UNIKO** series is configured with high-output LED light source. Standard with 120/347VAC input and consumes only 2W nominal power.

MECHANICAL SPECIFICATIONS

The **UNIKO** series is constructed of die-cast aluminum in a brushed finish. The **UNIKO** can be wall mounted or pendant mounted.


ORDERING INFORMATION

Series	Operation	Light Source	Face #	Pictogram	Options
UKO-RM	Blank (AC only)	L (LED)	1 (single)	OLR (Universal pictograms)	AT (Auto-test)
	SP (Self-powered)		*2 (double)	O (No indicators)	SW (Special wording - specify)
				L (Left indicator)	WG (Wireguard)
				R (Right indicator)	PK (Pendant kit - specify length)
				D (Down indicator)	90SP (90 minute emergency)
				U (Up indicator)	120SP (120 minute emergency)
				UR (45° up right)	PA (Polished aluminum finish)
				DR (45° down right)	
				UL (45° up left)	
				DL (45° down left)	

NOTE: *Two pictograms or OLR must be ordered, pendant mount only.

EXAMPLE: UKO-RM-L-1-O-PK12 DESCRIPTION: Uniko sign, single face, no directional indicators, 12" pendant kit.

DIMENSIONS (MM, IN.)

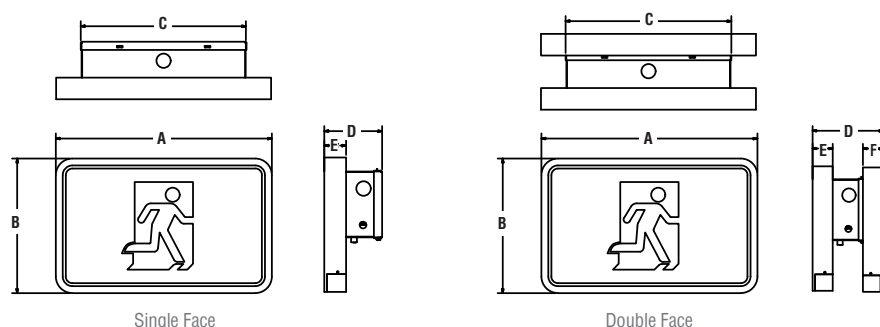

Model	A	B	C	D	E	F
Single Face	330mm (13")	210mm (8 ^{1/4} ")	254mm (10")	89mm (3 ^{1/2} ")	31.75mm (1 ^{1/4} ")	N/A
Double Face	330mm (13")	210mm (8 ^{1/4} ")	254mm (10")	114mm (4 ^{1/2} ")	31.75mm (1 ^{1/4} ")	31.75mm (1 ^{1/4} ")

BEGHELLI AUTO-TEST (AT)

The Beghelli auto-test system automatically performs one 5 minute discharge test monthly and every 6 months it performs two 30 minute discharge tests, 24 hours apart. This tests both full battery capacity and recharge capability. The information is communicated simply and intuitively to maintenance personnel via a single multicolour LED. No need to memorize complex indicator protocols. No confusing array of multiple, same coloured LEDs that can be difficult to read from floor level.

INTERNAL SPECIFICATIONS

120/347VAC input is standard. **UNIKO** is CSA 22.2 No. 141-15 Performance Certified. If an AC generator is used to back up the signs, a surge suppression device is recommended to protect the entire emergency circuit.

BATTERY TECHNOLOGY

The **UNIKO-SP** is designed with a lead acid battery providing a minimum emergency duration of 30 minutes. An optional 90 or 120 minute lead acid battery is available. Recharge time of the battery is less than twenty-four [24] hours.

UNIVERSAL PICTOGRAMS

The OLR (Universal) option includes: a pictogram with no directional indicators, a pictogram with a left facing directional indicator and a pictogram with a right facing directional indicator.



FACE OPTIONS

When ordering a single face, choose one pictogram option. When ordering a double face, choose 2 pictogram options.

SELF-POWERED VERSIONS

The **UNIKO-SP** series is designed to operate on battery power in the event of a power failure. Both the battery and charger are completely contained within the standard enclosure. There are no external components and no alterations made to the external dimensions of the standard sign. Status is easily determined via an LED that indicates AC-ON. A push button test switch allows maintenance personnel to quickly confirm the operational status of the exit.