

DUALGLOW™

UP & Down Parking Garage Light



Beyond LED Technology's New DualGlow UP & DOWN LED Parking Garage Light, designed for maximum efficiency, flexibility, and durability. This versatile fixture is both wattage and CCT adjustable, making it suitable for parking garages, carports, and large open spaces applications. With an adjustable wattage of 30W, 50W, 75W, and 100W, and adjustable color temperatures of 3000K, 4000K, and 5000K, which provides customizable lighting to meet specific needs. The innovative dual-sided design provides both upward and downward illumination, ensuring even light distribution throughout the space. Our DualGlow Up & Down LED Parking Garage lights comes with a 3-pin sensor base for easy integration of on/off control sensors, enhancing energy efficiency by activating light only when needed. It also has a 160-Degree Beam Angle which provides wide, even light distribution for maximum coverage.

Product Features

- Up to 155 Lumens per watt
- Wattage Adjustable 30W/50W/75W/100W
- CCT Adjustable 3000K/4000K/5000K
- 3/4" NPT conduit entry on top for pendant mounting
- Up light switch as standard
- Flicker-free
- IP65 Rated
- White Housing
- ADC12 die-casting aluminum, which has excellent heat dissipation effect.
- Input Voltage 120-277Vac
- ETL Listed
- 5 Year warranty

DUALGLOW™

UP & Down Parking Garage Light



SKU #	Model #	Wattage Adj.	Lumens	CCT Adjustable	Input Voltage	Dimming	Certifications
156993	CP02-100WS-3CS-U	30W/50W/75W/ 100W	15500Lm	3000K /4000K / 5000K	120-277V	0-10V	ETL

SKU: 156993

Specifications


Parameter	Description	Value
General Performance	Model #	CP02-100WS-3CS-U
	Wattage Adjustable	30W / 50W / 75W / 100W
	Lumen	15500Lm
	Lumen Efficacy	Up to 155LM/W
	Color Temperature	3000K / 4000K / 5000K
	CRI (Ra)	≥70
	Beam Angle	160° Degree
	Diffuser Type	PC Lens
Electrical	Input Voltage	120-277Vac
	Frequency	50/60Hz
	Dimming	0-10V Dimmable
	Power Factor	>0.9
	Driver Surge Protection	4kV line-line, 6kV line-earth
	Flicker Percent	Flicker Free
Physical	Operating Temperature	-30°C to 45°C
	Operating Humidity	5%RH To 95%RH
	Storage Temperature	-40°C to 70°C
	Storage Humidity	5%RH To 95%RH
	LED Brand	Lumiled
	LED Type	2835
	LED QTY	360PCS(DOWN)+ 36PCS(UP)
	Housing	Aluminum alloy
Qualification	Housing Color	White
	IP Rating	IP65
	Warranty	5 Year warranty




DUALGLOW™

UP & Down
Parking Garage Light

Correlated Color Temperature (CCT)

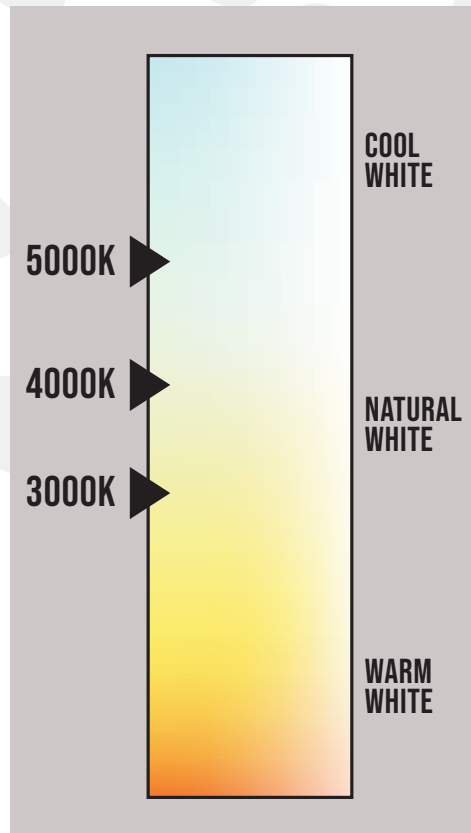

Dimensions

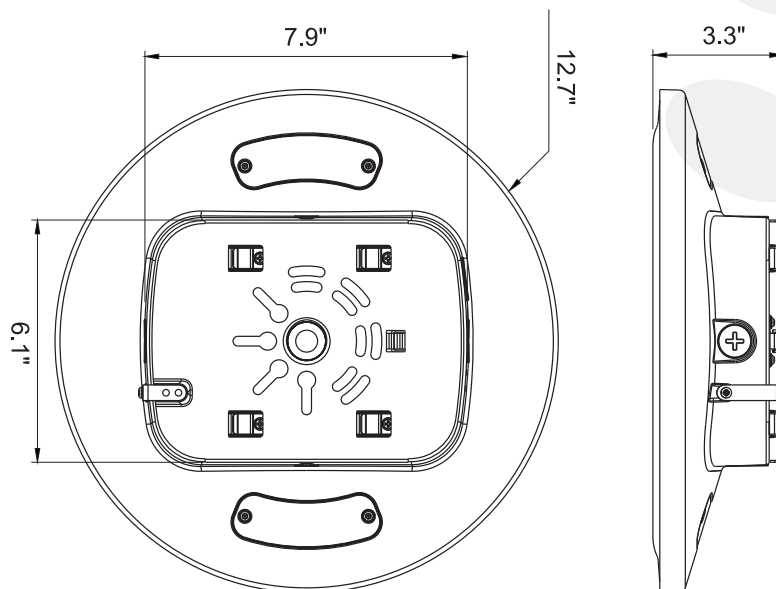

DUALGLOW™

UP & Down Parking Garage Light



Optional Accessories




Motion sensor
PC
Φ52*20mm

Code: SR-H30-01




PIR sensor
PC
Φ61*28mm

Code: HN074-01VRPH



Emergency kit
SPCC

8W1.5H emergency backup
Operating Voltage: 120-277V
IP Rating:IP20
Code: EM-C02-01




Emergency kit

SPCC
8W1.5H emergency backup
Operating Voltage: 120-347V
IP Rating:IP20
Code: EM-C02-02

Photometric Data

80W/100W beam angle

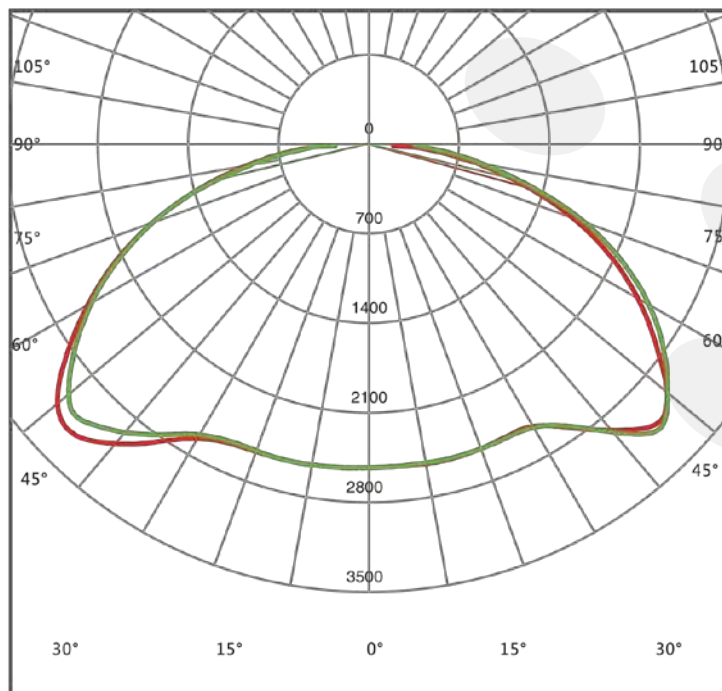

U00C07


LED PARKING GARAGE LIGHT



DUALGLOW™

UP & Down Parking Garage Light

Installation

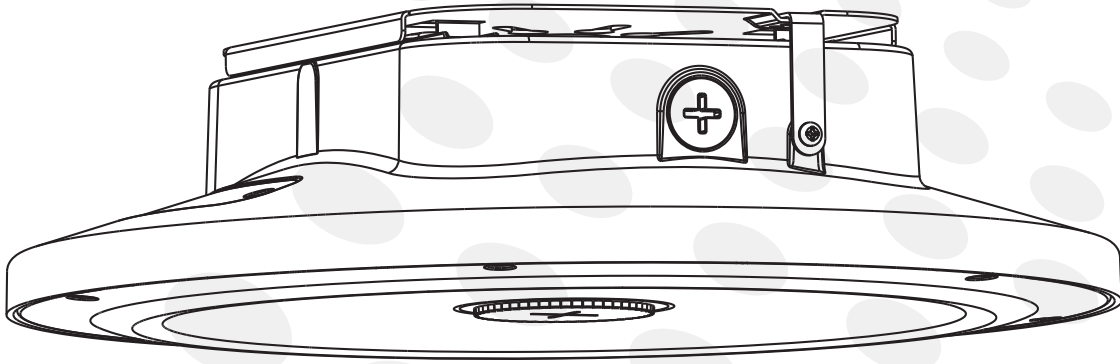


Product Specifications	30W	50W	75W	100W
Input Voltage	120-277Vac			
Power Frequency	50 / 60 Hz			
Outlook Dimensions	Ø322x84mm(Ø12.7"x3.3")			
Net Weight(±6%)	2.6kg(5.73Lbs)			
Working Temperature	-30°C to +50°C(-22°F to +122°F)			-30°C to +45°C (-22°F to +113°F)
Storing Temperature	-40°C to +70°C(-40°F to +158°F)			

* Please subject to actual product for accurate weight.


Power & CCT Selectable

* Warning: Please disconnect power before adjusting the power and CCT.

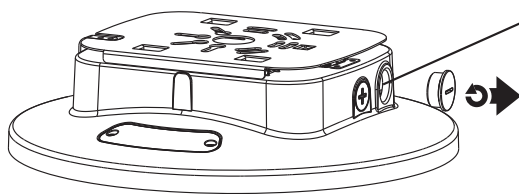


CCT DIP switch

Power DIP switch



3 CCT Selectable

WW
NW
CW




DUALGLOW™

UP & Down Parking Garage Light



Installation


4 Power Selectable




* The tolerance for power is $\pm 10\%$

Power	100%	75%	50%	30%
25W	25W	19W	13W	7.5W
40W	40W	30W	20W	12W
60W	60W	45W	30W	18W
80W	80W	60W	40W	24W
100W	100W	75W	50W	30W


Sensor Mounting

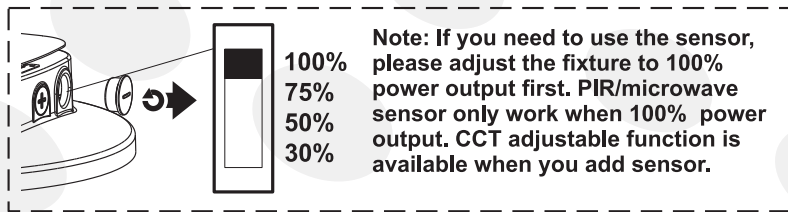

1

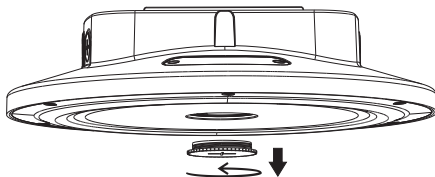





2

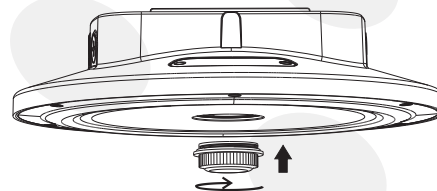

Uplight (Standard)

* Uplight is standard, if not needed, please turn off the switch.

Uplight Panel

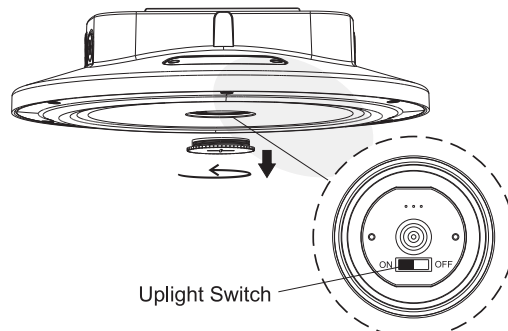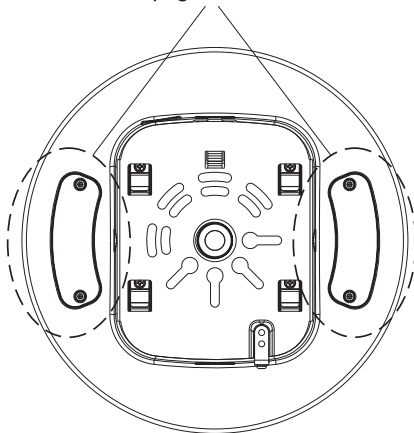




DUALGLOW™

UP & Down Parking Garage Light


Installation

Ceiling Mounting

1

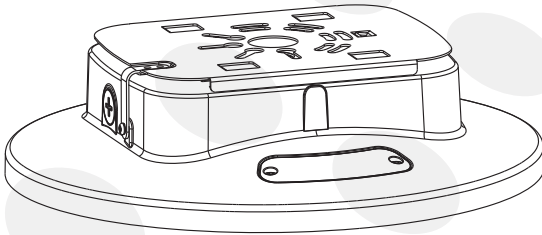


2

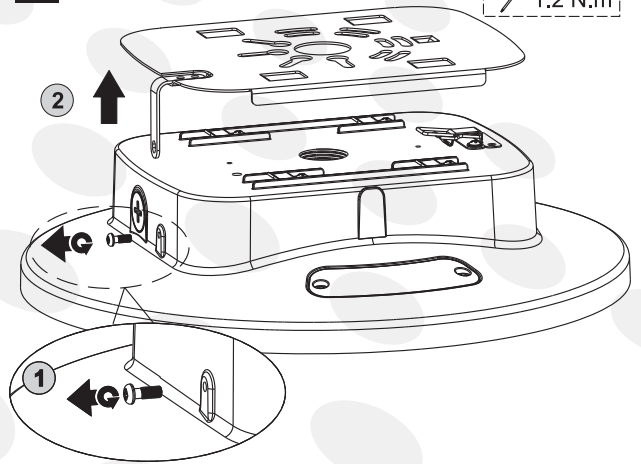


M4x10
1PC
1.2 N.m

3

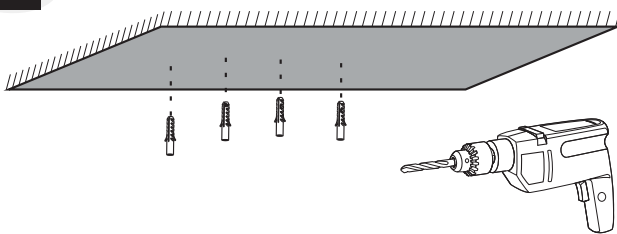

Drilling pattern:

Unit: mm/inch

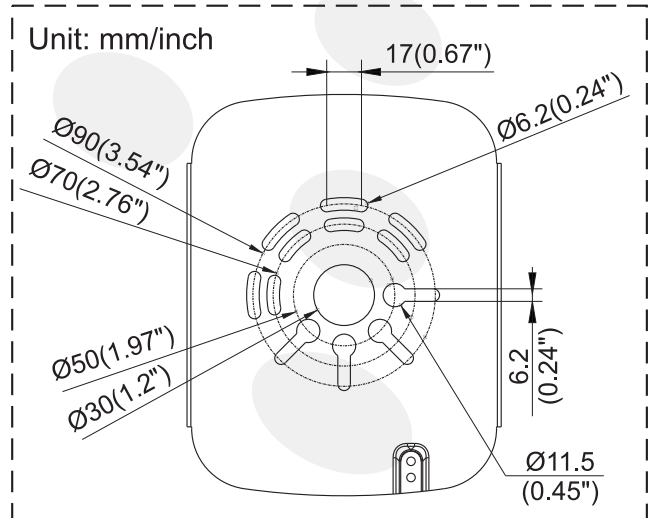


Ø8x40mm
4 PCS

DUALGLOW™

UP & Down Parking Garage Light



Installation

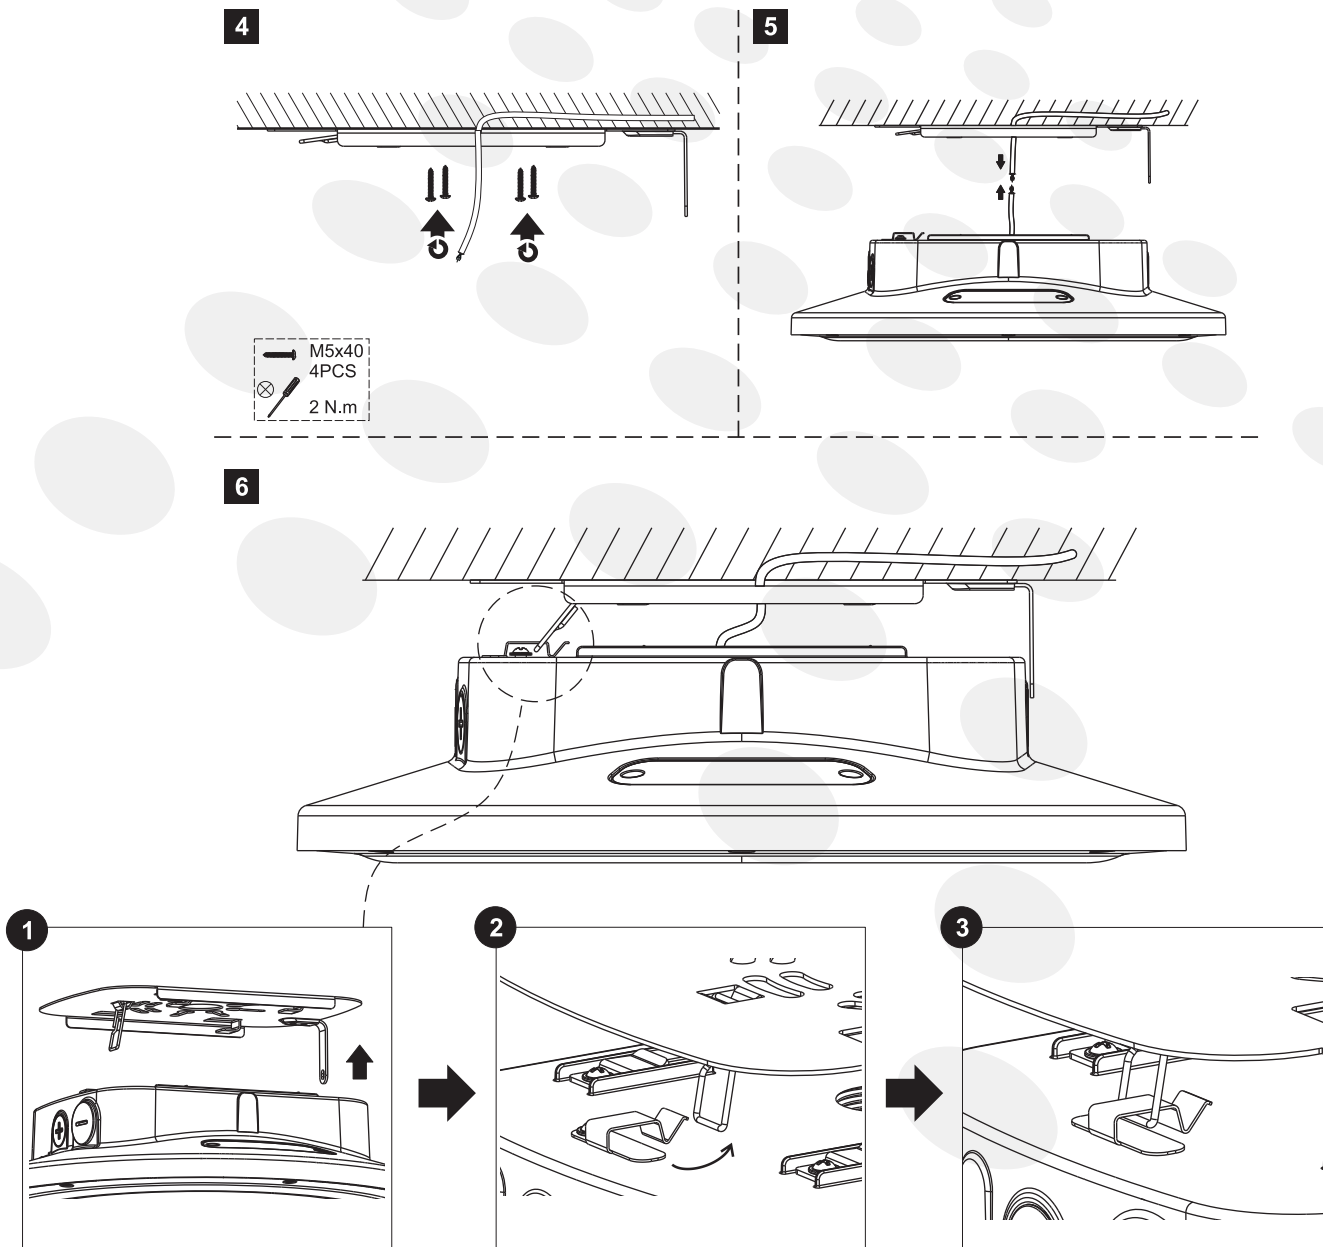








DUALGLOW™




UP & Down Parking Garage Light

Installation

7

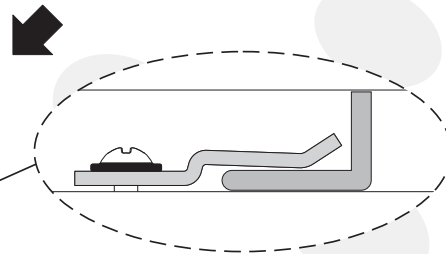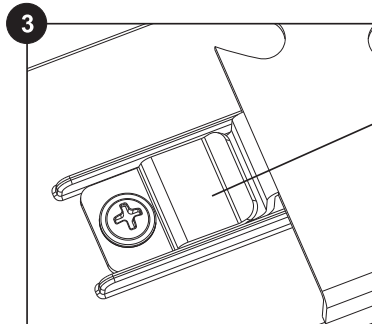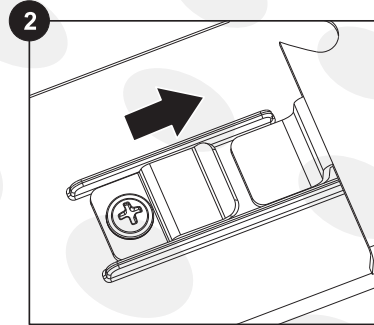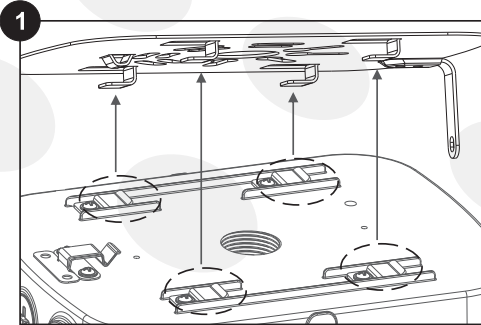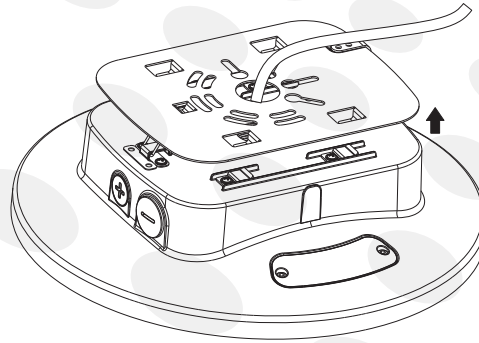

8

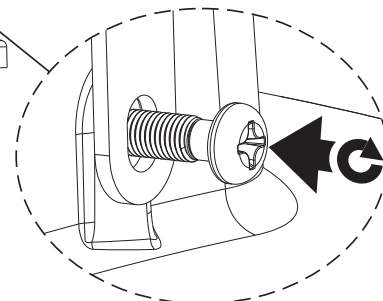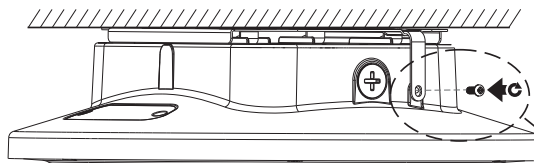

DUALGLOW™


UP & Down Parking Garage Light




Installation

3/4" NPT Conduit Mounting

1

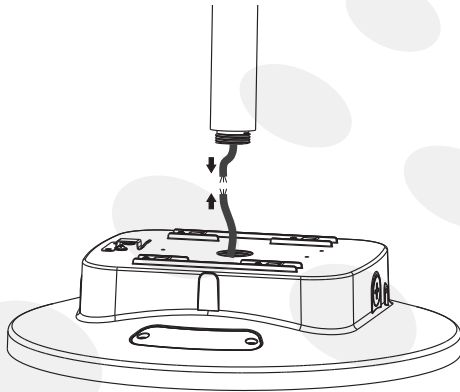


2

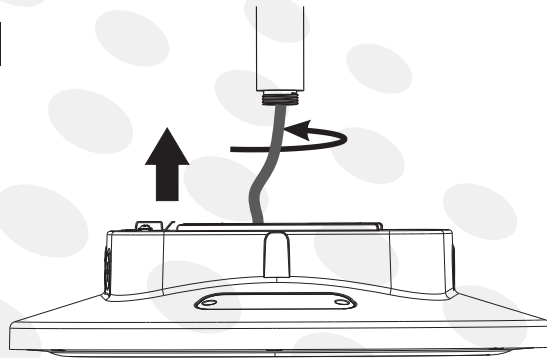

USE PLUMBERS TAPE/PUTTY FOR SECURE SEAL, OTHERWISE LUMINAIRE WILL NOT BE WATERTIGHT

3

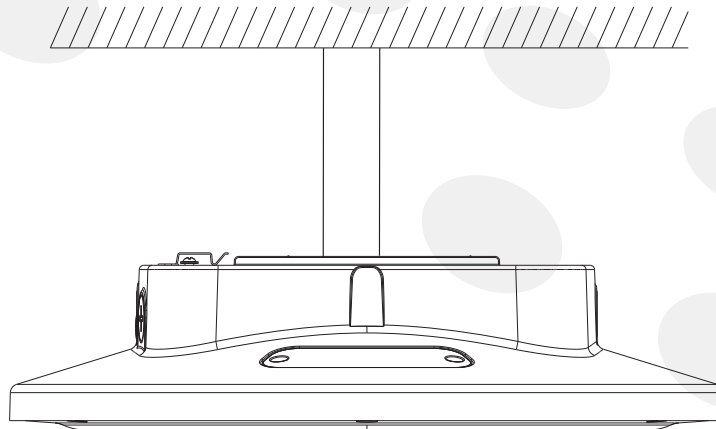

AC cords

L	brown		black
N	blue		white
	yellow/green		green



DUALGLOW™

UP & Down Parking Garage Light

Installation

Reminder

We appreciate your purchase!

Please read the entire instruction manual before installation and keep it for future reference.

1. Please do not modify or dismantle the luminaire or replace accessories without confirming with the supplier first.
2. Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or hazard.
3. Please disconnect power before installation or any maintenance of the lamp. Do not touch the power supply when the lamp is operating.
4. If the luminaire begins to smoke or emit odors, please disconnect power since fire or electric shock may occur. And ask qualified person to inspect and maintain the luminaire.
5. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
6. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
7. We suggest you adding a separate surge protection device in distribution box to extend luminaire lifespan.

Applications

1. The product is designed for indoor parking area, garage, basement and similar applications. For other special applications, please consult your salesperson to confirm firstly.
2. The product is designed for indoor.
3. Too much dust or oil accumulation on PC lens will stop the lighting emit and heat dissipation, it will change lighting distribution, and cause high heat inside to affect LED chips performance. For such environments, we suggest you to clean the luminaire regularly to ensure longer lifespan. Or you need to use product with glass cover and better heat performance instead.
4. The suggested mounting height of the luminaire is 3-5m.
5. If you want add sensor on the luminaire, please mount samples in your project before mounting batch volume directly. Here are some tips to choose the right sensor: microwave sensor should keep away from large areas of metal and glass reflectors (separation distance at least 1m) to avoid luminaire abnormal working. PIR sensor should keep away from high temperature environments to avoid luminaire no response, please contact your salesperson for detailed suggestion for certain project.

Packaging

SKU #.	Box Type	Dimension (Inches)	Qty	Net Weight	Gross Weight
156993	Outer Box	14.76 x 14.76 x 5.51	1	5.73LBS	8.4LBS

DUALGLOW™

UP & Down
Parking Garage Light



Application



LED PARKING GARAGE LIGHT

Warranty

5 Year Warranty