

<b>Project:</b>
<b>Type:</b>
<b>Date:</b>
<b>Product Code:</b>
<b>Approval:</b>



*Durability, and performance with fluorescent lighting.*

**BFHC**

Industrial-grade, suspended-mount fluorescent high bay fixture. It has been designed for indoor use where high-efficiency, ease of installation and sturdy construction are primary considerations. Its rugged design and superior light paths make it an ideal fixture for high bay applications where dampness and dust are not a factor.

**FEATURES**

- Available with 4' body and custom sizing
- High reflectance specular aluminum standard
- T5 or T8 lamps

**OPTIONS**

- 4' and custom lengths available
- Dimmable and emergency ballast
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 2, 3, 4, 6, 8, 10 or 12 lamps available
- Various lens available (consult factory)
- Wireguard with various finishes (consult factory)
- T5 or T8

**APPLICATIONS**

- Manufacturing
- Storage areas
- Warehouse facilities

**APPROVALS**

- ETL listed product

**OPTICS**

Pre-painted low gloss powder coated body utilizes a highly reflective finish for enhanced performance. Multi-faceted reflector is manufactured to achieve optimal lamp performance. T5 and T8 light sources are available. Various lens options offers a full range of flexibility and aesthetic appearance.

**ELECTRICAL**

All components have met all regulatory approvals. Fixture is available in 120 - 277VAC and 347V options. Lamp retention through rotary lamp holders.

**MOUNTING**


Holes provided for S-hook chain-mounting and inversion hanging.

**CONSTRUCTION**

Powder coated body that is welded for added strength and rigidity (available in various colours - consult factory). Spot welded .030" nominal cold rolled steel enhances rigidity and durability. The sturdy hinged door frame comes standard with a .125" nominal acrylic lens. Knock-outs provide easy through wiring for row-mounted applications.



**PRODUCT DIMENSIONS**

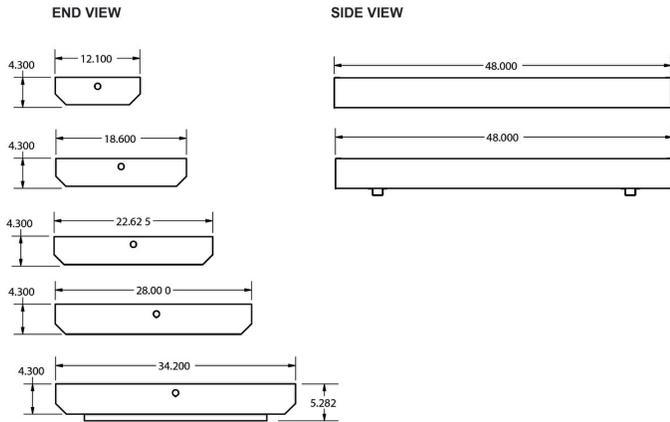

**PRODUCT KEY**

Fixture Type	Fixture Size	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFHC	4'	2	28	T5	120	Normal (N)	
		3	32	T8	120/277 (UNV)	High (H)	
		4	54		347	Low (L)	
		6					
		8					
		10					
		12					

**OPTIONS**

<p><b>Battery Back-Up</b> (Needs to be specified)</p> <p><b>Lens</b> L0 - No Lens Supplied L55 - Clear Acrylic Lens L26 - Clear Polycarbonate Lens</p> <p><b>Wireguard</b> G1 - Wireguard Heavy Duty, Painted White</p>	<p><b>Reflector</b> R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92%</p> <p><b>Sensors</b> W12 - Motion Sensor - 10C W13 - Motion Sensor - 40C W26 - Motion Sensor With Photocell</p>	<p><b>Wire</b> W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p><b>Hangers</b> M1 - Speedy Hanger (V-Bracket) M2 - Speedy Hanger &amp; Aircraft Cable 5FT M4 - Aircraft Cable "V-Hanger", 18 Inch</p>
---	--	---

