

Project:
Type:
Date:
Product Code:
Approval:



Performance, and cost-effective and superior craftsmanship.

BFHI

Quality-grade, fluorescent surface and suspended mount high bay fixture. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required. Its multi-faceted reflector makes it ideally suited for general area illumination.

FEATURES

- Body is manufactured from utility aluminum
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- Available with 2, 3, 4, 6 or 8 lamp configurations

OPTIONS

- Multi-level switching, dimmable ballast
- 347V options available
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 2, 3, 4, 6 or 8 lamps available
- T5 or T8

APPLICATIONS

- Manufacturing
- Retail stores
- Warehouse facilities

APPROVALS

- ETL listed product

OPTICS

Multi-faceted reflector is manufactured to achieve optimal lamp performance. T5 and T8 light sources are available.

ELECTRICAL

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Fixture is available in 120 - 277VAC and 347V options.

MOUNTING


Can be row-mounted using a suspended or surface-mount configuration. Holes provided for S-hook chain-mounting and inversion hanging.

CONSTRUCTION

Heavy-gauge aluminum fixture channel provides added strength and rigidity. Light weight construction allows for easy on-site handling and installation. Access to ballast from the back of fixture allows for quick servicing on site.



PRODUCT DIMENSIONS

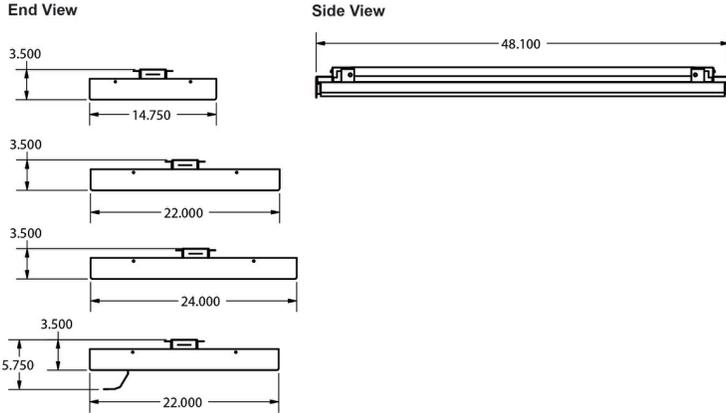

PRODUCT KEY

Fixture Type	Product Series	Fixture Length	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFHI	<input type="text"/>	4'	<input type="text"/> LP	<input type="text"/> W	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Blank - Aluminum		2	28	T5	120	Normal (N)	
	S - Steel		3	32	T8	120/277 (UNV)	High (H)	
			4	54		347	Low (L)	
			6					
			8					

OPTIONS

<p>Battery Back-Up (Needs to be specified)</p> <p>Hangers M1 - Speedy Hanger (V-Bracket) M3 - Aircraft Cable "Y" Toggle With Cable Gripper (5, 10 and 15') M25 - Surface Mounting Bracket</p>	<p>Reflector R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92% R6 - Reflector Slotted - Specular Aluminum 92% R9 - Wall Wash - Specular Aluminum 92%</p> <p>Sensors W12 - Motion Sensor - 10C W26 - Motion Sensor with Photocell</p>	<p>Wire W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p>
---	--	--

