

Project:
Type:
Date:
Product Code:
Approval:



*Durability, and performance with T5 lighting.*

**BFIN T5 - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE**

Contractor-grade, surface and suspended mount fluorescent strip fixture. It has been designed for indoor use where high-efficiency, ease of installation and sturdy construction are primary considerations. Its multi-faceted reflector makes it ideally suited for general area illumination.

**FEATURES**

- Pre-painted, high-reflectance white body
- High-reflectance white steel reflector standard
- Can be row mounted

**OPTIONS**

- 4', 8' and custom lengths available (consult factory)
- Dimmable and emergency ballast
- Reflectors available in pre-painted high-reflectance white steel, white aluminum and specular aluminum
- 1, 2, 3 or 4 lamps available
- Wireguard with various finishes (consult factory)

**APPLICATIONS**

- Manufacturing
- Stairwells
- Storage areas
- Task lighting
- Warehouse facilities

**APPROVALS**

- ETL listed product

**OPTICS**

Pre-painted body in high-reflectance white. Multi-faceted reflector is manufactured to achieve optimal lamp performance. Reflectors available in high-reflectance white steel, white aluminum and specularized aluminum. T5 fluorescent light source is standard.

**ELECTRICAL**

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Fixture is available in 120 - 277VAC and 347V options.

**MOUNTING**


Can be row-mounted using a suspended or surface-mount configuration. Optional mounting is available with aircraft cable, chain or stem mounting.

**CONSTRUCTION**

Die-formed, heavy-gauge cold rolled pre-painted steel. End caps are fastened by screws allowing the flexibility of repositioning to act as joiners for raceway wiring. Non-tandem units offer a single piece reflector.



**PRODUCT DIMENSIONS**

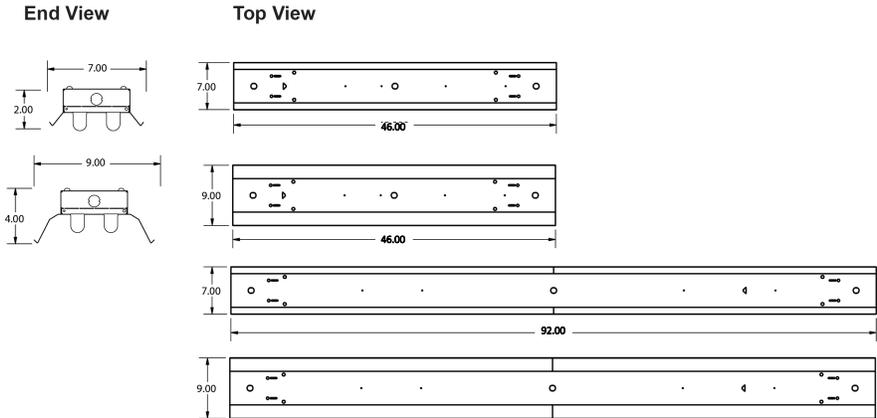

**PRODUCT KEY**

Fixture Type	Fixture Length	Fixture Length	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFIN	<input type="text"/>	<input type="text"/>	<input type="text"/> LP	<input type="text"/> W	T5	<input type="text"/>	<input type="text"/>	<input type="text"/>
	M - 2.00"	2'	1	28		120	Normal (N)	
	N - 3.00"	3'	2	54		120/277 (UNV)	High (H)	
	(blank) - 5"	4'	3			347		
		8'	4					
			6					
			8					

**OPTIONS**

<p><b>Battery Back-Up</b> (Needs to be specified)</p> <p><b>Wireguard</b> G1 - Wireguard Heavy Duty, Painted White</p>	<p><b>Reflector</b> R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92% S - Reflector - Shallow</p> <p><b>Sensors</b> W12 - Motion Sensor - 10C</p>	<p><b>Wire</b> W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p><b>Hangers</b> M1 - Speedy Hanger (V-Bracket) M3 - Aircraft Cable "Y" Toggle With Cable Gripper (5, 10 and 15')</p>
--	---	---