

Project:
Type:
Date:
Product Code:
Approval:



Stylish and cost-effective fluorescent lighting.

BFMQ - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Professional-grade surface-mounted fluorescent wrap fixture. It has been designed for indoor use where high-efficiency, ease of installation and sturdy construction are primary considerations. Its slim design makes this fixture ideally suited in any application where aesthetics is a primary consideration.

FEATURES

- 2', 3', 4' and custom lengths
- Powder coated for a clean look
- Available in 1 or 2 lamp configurations
- End caps are either bolted or spring loaded
- Available in T5 or T8

OPTIONS

- Lumen packages are available in 2000, 4000 and 6000 lumens
- K12 or opal lenses available
- 1 or 2 lamps
- T5 or T8

APPLICATIONS

- Hospitals
- Offices
- Reception areas
- Retail stores
- Schools

APPROVALS

- ETL listed product

OPTICS

Pre-painted body in high-reflectance white. T5 and T8 light sources are available. Optional K12 or opal lenses provide a clean and smooth light source.

ELECTRICAL

All components have met all regulatory approvals. Fixture is available in 120 - 277VAC and 347V options. Lamp retention through rotary lamp holders.

MOUNTING

Holes provided for convenient surface mounting. Can be row-mounted in continuous configurations.


CONSTRUCTION

Formed 0.030" nom. cold rolled steel is bent for added strength and rigidity. End caps are either bolted or spring loaded for enhanced flexibility.




PRODUCT DIMENSIONS




End View
Bolted End Cap



Spring Loaded End Cap



Side View

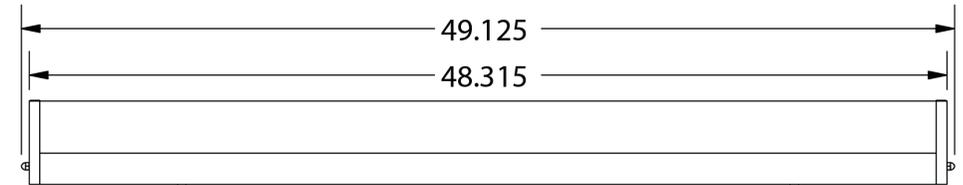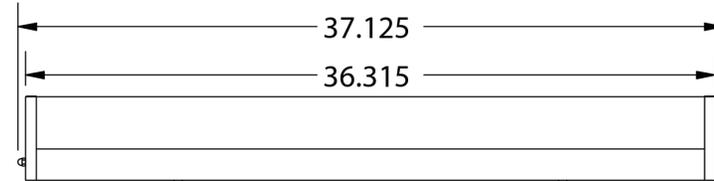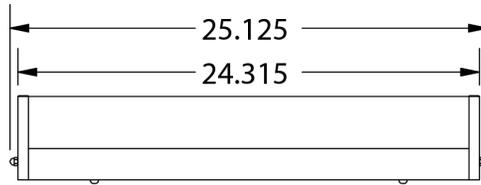

PRODUCT KEY

Fixture Type	Fixture Diameter	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFMQ	<input type="text"/>	<input type="text"/>	<input type="text"/> W	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	2	1	28	T5	120	Normal (N)	
	3	2	32	T8	120/277(UNV)	High (H)	
	4		54		347	Low (L)	

OPTIONS

<p>Battery Back-Up (Needs to be specified)</p> <p>Lens L20 - Lens P12 Acrylic 0.125" Thick L53 - Opal Lens</p>	<p>End Caps Blank - Bolted End Cap SP - Spring Loaded End Cap</p>	<p>Wire W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p>
--	--	--

