

<b>Project:</b>
<b>Type:</b>
<b>Date:</b>
<b>Product Code:</b>
<b>Approval:</b>



*Performance, functionality and superior craftsmanship.*

**BFWB - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE**

Contractor-grade, surface and suspended mount fluorescent wrap fixture. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required. Its wrap around lens provides excellent downward and upward light distribution.

**FEATURES**

- Available in 4' or 8' lengths (custom sizes available)
- Pre-painted, high-reflectance white body
- Available with 1, 2, 3, 4 or 6 lamp configurations
- K12 prismatic lens
- Available in T5 or T8

**OPTIONS**

- 4', 8' and custom lengths available (consult factory)
- Row-mounting available including staggered and continuous row-mounting
- Other finishes are available (consult factory)
- Dimmable and emergency ballast
- 1, 2, 3, 4 or 6 lamps available
- Occupancy and dimming controls

**APPLICATIONS**

- Garages
- Manufacturing
- Retail stores

**APPROVALS**

- ETL listed product

**OPTICS**

Pre-painted body in high-reflectance white. T5 and T8 light sources are available. Diffuser is a clear acrylic lens with a #12 prismatic pattern (standard).

**ELECTRICAL**

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Lamp retention through rotary lamp holders.

**MOUNTING**


Can be mounted using suspended or surface-mount configuration. Holes provided for convenient surface mounting or S-hook chain-mounting.

**CONSTRUCTION**

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. End Caps are made from 0.030 cold rolled steel powder coated white. Heavy-duty K12 bottom lens with linear sides ensure maximum performance and aesthetical value. End knock-outs allow for continuous wiring.



**PRODUCT DIMENSIONS**

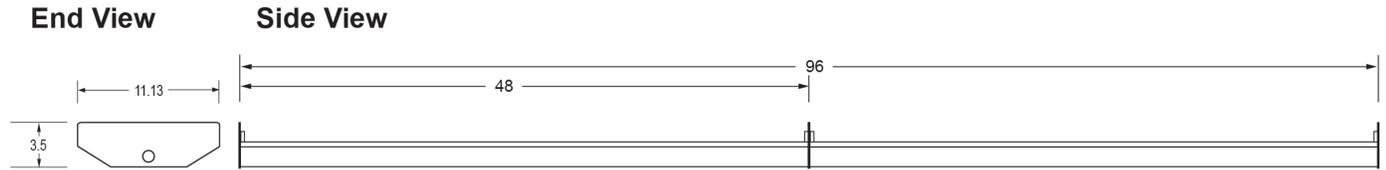

**PRODUCT KEY**

Fixture Type	Fixture Size	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFWB		LP	W				
	4'	1	28	T5	120	Normal (N)	
	8'	2	32	T8	120/277 (UNV)	High (H)	
		3	54		347	Low (L)	
		4					
		6					

**OPTIONS**

<p><b>Battery Back-Up</b> (Needs to be specified)</p> <p><b>Lens</b> L0 - No Lens Supplied L20 - Lens P12 Acrylic 0.125" Thick</p> <p><b>Wireguard</b> G1 - Wireguard Heavy Duty, Painted White</p>	<p><b>Reflector</b> R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92%</p> <p><b>Sensors</b> W12 - Motion Sensor - 10C W13 - Motion Sensor - 40C</p>	<p><b>Wire</b> W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p><b>Hangers</b> M1 - Speedy Hanger (V-Bracket) M2 - Speedy Hanger &amp; Aircraft Cable 5FT M4 - Aircraft Cable "V-Hanger", 18 Inch</p>
---	---	---

