

Project:
Type:
Date:
Product Code:
Approval:



BLRC

Superior-grade, LED recessed circular drywall fixture. It is ideal for indoor use where energy-efficiency, performance and elegant style are essential. Its unique lens makes it ideally suited for architectural applications.

FEATURES

- Full dimming option standard with all sizes
- L70 of 120,000 hours
- 0 - 10V dimming standard

OPTIONS

- 3', 4' and 5' diameters available
- Lumen packages are available from 10,000L to 22,000L
- Available in 3000K, 3500K, 4000K, 5000K, and 6500K
- 90 CRI available
- NEDAP wireless controls

APPLICATIONS

- Offices
- Retail Stores


WARRANTY

- Standard 5 year system, and 10 year LED warranty

APPROVALS

- Adheres to CSA and UL standards

PRODUCT DIMENSIONS

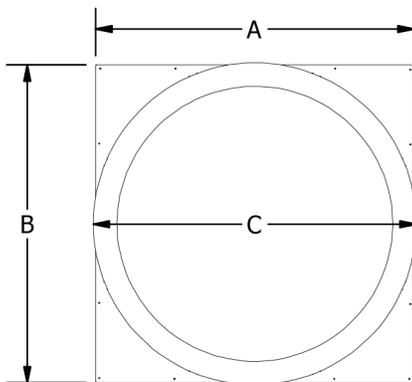

Fixture Size	A	B	C
3'	39.064	39.064	39.626
4'	51.064	51.064	50.605
5'	63.064	63.064	63.518

*specifications may change without notice

OPTICS

High-efficiency diffuser maximizes light distribution while providing full diffusion of LED point sources. Specialized LED lens delivers a consistent light to the area that is bright and evenly distributed.

ELECTRICAL

All components are UL recognized. This fixture is available in 120 - 277V and 347V.

MOUNTING

Consult the factory for details.

CONSTRUCTION

- Made of high quality pre-painted steel with a powder coated circular flange
- White acrylic lens for even light distribution
- Body is precision bent for added strength and rigidity and is comprised of 0.030" nominal thick steel



PRODUCT KEY

Fixture Type	Fixture Size	Lumen Output	CRI	Colour Temp	Driver Voltage	Options
BLRC						
	3'	10	8 - 80 CRI	30-3000 K	UNV	Wireless Controls
	4'	16	9 - 90 CRI	35-3500 K	347	WC1 - NEDAP Wireless Controls
	5'	22		40-4000 K		
				50-5000 K		
				65-6500 K		

WATTAGE CHART

Length	Lumen Output	Fixture Wattage
3'	10.0	78.0
4'	16.0	150.0
5'	22.0	200.0

- * Based on UNV voltage
- * Based on an Frosted lens
- * Based on 4000K