


Project:
Type:
Date:
Product Code:
Approval:

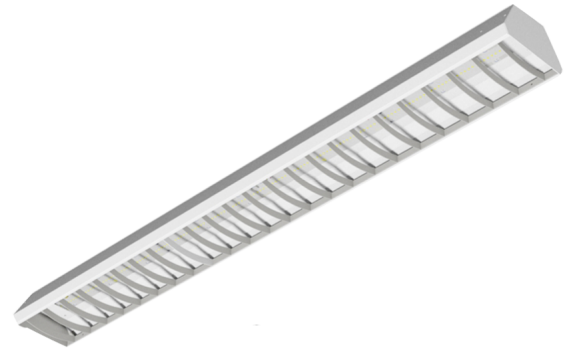

*Stylish, performance and superior craftsmanship.*

### **BLSDB - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE**

Professional-grade surface and suspended mount LED strip fixture. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required. Its slim design makes this fixture ideally suited in any application where an aesthetics is a primary consideration.

#### **FEATURES**

- Available in 4' or 8' lengths (custom sizes available)
- Welded body and end caps for added strength and rigidity
- Utility aluminum reflector aids in light distribution
- LEDs are rated for up to 120,000 hours (L70)

#### **OPTIONS**

- 4' or 8' lengths available
- Available in 3000K, 3500K, 4000K and 5000K
- Standard baffle

#### **APPLICATIONS**

- Coves
- Offices
- Schools
- Task lighting

#### **APPROVALS**

- Adheres to CSA and UL standards

#### **OPTICS**

Pre-painted low gloss powder coated body utilizes a highly reflective finish for enhanced performance. Painted baffle provides both aesthetic quality and aids in the distribution of light output.

#### **ELECTRICAL**

All components have met all regulatory approvals. Fixture is available in 120 - 277VAC and 347V options.


#### **MOUNTING**

Holes provided for convenient surface mounting, aircraft cable or S-hook chain-mounting.

#### **CONSTRUCTION**

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. Low gloss high-reflectivity surface utilizes a powder coated finish. Painted baffle provides both aesthetic quality and aids in the distribution of light output.

## PRODUCT DIMENSIONS

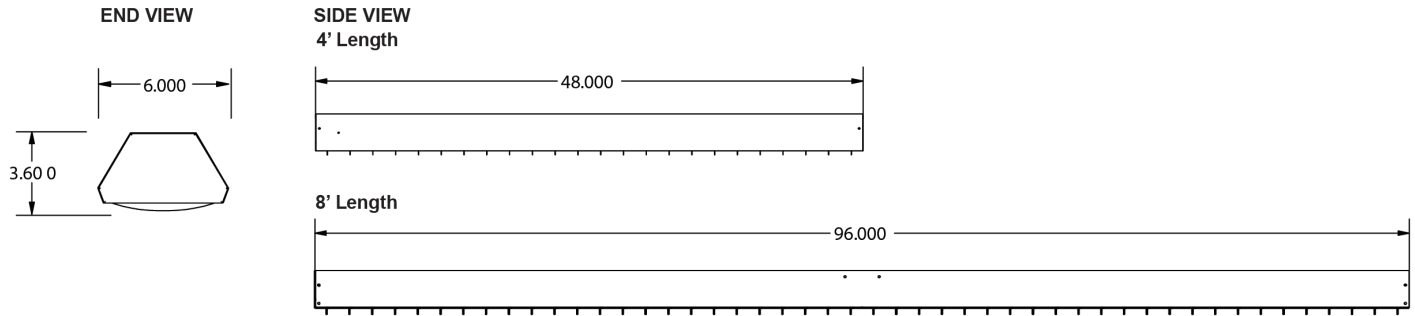

## PRODUCT KEY

Fixture Type	Fixture Sizes	Lumen Output (in 1,000s)	Module Type	CRI & Colour Temperature	Driver Voltage	Options
BLSDB		L				
	4'	2.5	Factory	830	UNV	
		3.5	Designated	835	347	
		4.5		840		
		5.5		850		
		6.5				
		7.5				
	8'	5.5				
		6.5				
		7.5				
		8.5				
		9.5				
		10.5				
		11.5				
		12.5				
		13.5				
		14.5				

### OPTIONS

#### Cords

- W3xx - 18/3 600V White (Specify length)
- W4xx - 18/3 600V Black (Specify length)
- W5xx - Power Cord Twist Lock Plug (Specify NEMA Code)
- W8xx - Power cord 3-Wire 120V 5-15P, 16/3

#### Hangers

- M1 - Speedy Hanger (V-Bracket)
- M3 - Aircraft Cable (Y-Toggle with cable gripper 5', 10', 15')
- M4 - Aircraft Cable (Y-Toggle, 18")
- M6 - Loop 10" (with cable gripper)

#### Dimming

- W23 - 0 - 10V No Leads (Standard)
- W24 - 0 - 10V with Leads

#### Motion Sensor

- W12 - Motion Sensor - 10C