

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) / 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.



"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"
"READ ALL INSTRUCTIONS"

"IMPORTANT SAFETY INSTRUCTIONS"

"SAVE THESE INSTRUCTIONS"

TOOLS AND MATERIALS REQUIRED:



Phillips Screwdriver



Pliers



Hammer




Wiring supplies as required by electrical code


SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. THIS FIXTURE IS DESIGNED FOR 120 VOLT CIRCUIT. IF UNSURE ABOUT WIRING, CONSULT AN ELECTRICIAN.
4. DO NOT CONNECT FIXTURE TO DIMMER CIRCUIT.
5. USE INDOORS ONLY. DO NOT USE IN WET LOCATIONS. DO NOT INSTALL ON A RADIANT-HEATING CEILING.
6. RISK OF SHOCK: TURN OFF POWER SWITCH AND FUSE. TURN OFF POWER SUPPLY AGAIN WHEN YOU CHANGE LAMPS OR PERFORM OTHER MAINTENANCE.
7. RISK OF FIRE: DO NOT OVERLOAD CIRCUIT AND WIRING. RISK OF INJURY: DO NOT OPEN FIXTURE AND ATTEMPT TO CONNECT WIRES TO BALLAST. CONSULT A QUALIFIED PROFESSIONAL ELECTRICIAN.
8. RISK OF CUTS: TO PREVENT CUTS AND SCRAPES, WEAR GLOVES WHEN HANDLING THE PARTS OR FIXTURE.
9. BULB MAY SHATTER AND CAUSE INJURY IF BROKEN. DO NOT USE EXCESSIVE FORCE WHEN INSTALLING BULB.

INSTALLATION: NOTE: Product May Not Look Exactly As Shown In Figures.

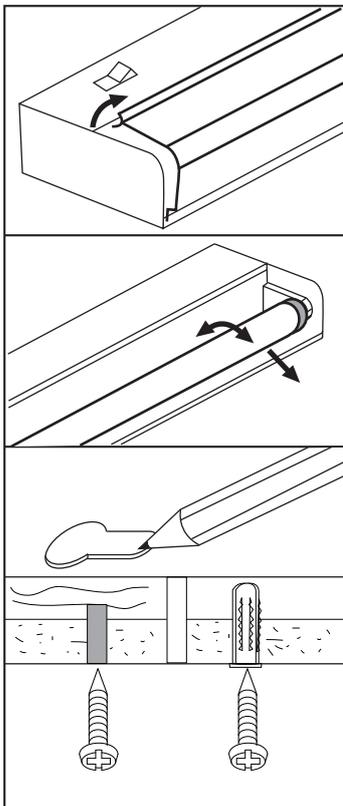

1. Remove the lens by lightly pressing the top edge of the lens. The lens should pop out easily.
2. Remove the bulb from the fixture by grasping on the metal ends of the bulb. While applying slight pressure on the bulb, rotating the bulb until the contact pins bet loose from the lampholders.
3. Mark position of the keyslot holes on the fixture with a pencil in the mounting surface. Mount fixture by wood screws on wooden studs or plastic wall anchors on drywall.

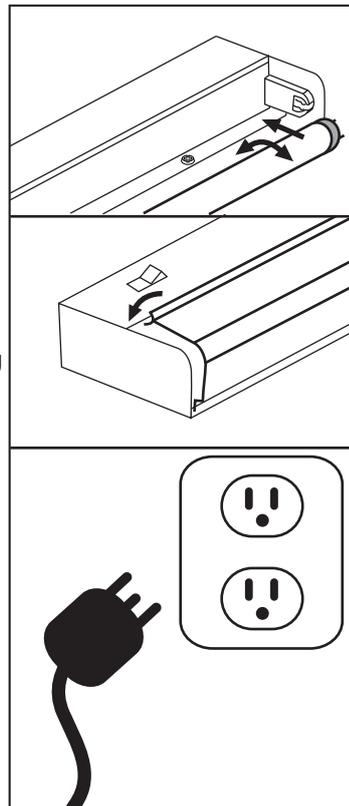

4. Install bulb by inserting the pins on both ends of the fluorescent tube into the lampholders on both ends. Rotate the tube until a slight of "click".
5. Install the lens to fixture by pushing the top edge down into the bottom edge until it locks.
6. Plug cord into a grounded 120V, 60 Hz outlet.