



TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Pliers



Wrench


Wiring supplies
as required by
the Canadian
Electrical Code
and/or the
Quebec
Electrical code

SAFETY PRECAUTIONS:


1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. FIRMLY ATTACH THE FIXTURE GROUND WIRE (BARE COPPER) TO THE MOUNTING BRACKET WITH THE GROUND SCREW (BY WRAPPING AROUND THE GROUND SCREW) AND THEN CONNECT IT TO THE HOUSE SUPPLY GROUND WIRE WITH A WIRE NUT.

NOTE: PRODUCT MAY NOT LOOK EXACTLY AS SHOWN IN FIGURES.


INSTALLATION:

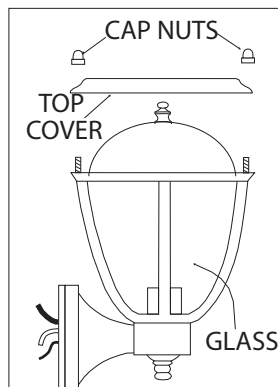


1. If applicable, remove cap nuts, top cover, and glass from the fixture.

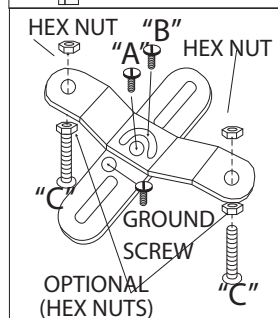


2. Assemble the mounting bracket (2 pieces) as per drawing. "A" and "B" screws should only be snug at this point. Screw "C" may be tightened and locked in place with hex nut(s) (if mounting bracket holes are untapped, an additional two hex nuts are required). The ground screw should then be attached to the mounting bracket (do not tighten).

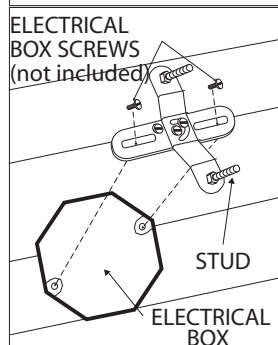


3. Attach mounting bracket assembly to electrical box as shown.

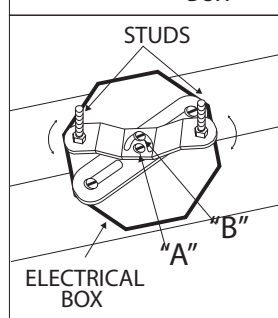

4. Position mounting bracket so that the fixture will sit level once it is mounted to the wall. Tighten screws "A" and "B" to hold in place.

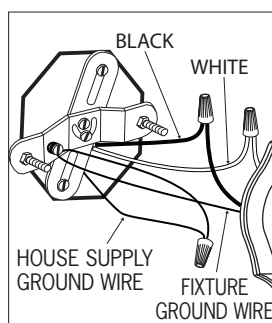


5. Firmly attach the fixture ground wire (bare copper) to the mounting bracket with the ground screw (by wrapping around the ground screw) and then connect it to the house supply ground wire with a wire nut. Connect black wire from fixture to black wire in outlet box and connect the white wire from fixture to white wire in outlet box.

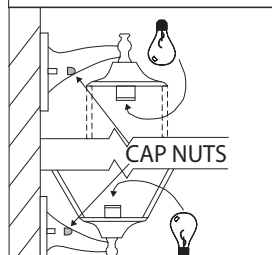


6. Tuck all electrical wires into the electrical box and install the light fixture to the wall by aligning the hole(s) in the fixture with the studs or nipple on the mounting bracket. Secure in place with cap nut(s).



7. Seal around the top and side perimeter between the fixture and the wall surface with weather resistant caulking. The bottom should be left un-caulked to prevent moisture build-up.

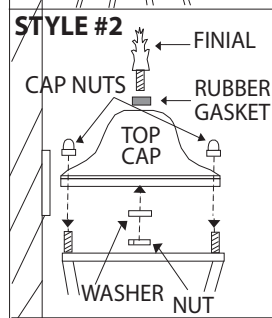

8. Install the proper bulb type and wattage (not included).
Note: Some Fixtures will be complete at this point.

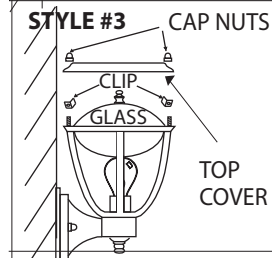

9. Complete fixture assembly:
Style#1 - Place the top cap on the fixture and secure in place by threading the finial onto the nipple until it is snug.
Style#2 - Place finial and gasket onto top cap and secure with washer and nut. Attach top cap to fixture using the cap nuts.
Style#3 - Install the glass and top cover locking in place with cap nuts and 2 clips.