

AWP04 Architectural Wall Pack

Power Selectable | 3CCT | 120-347V

Meet the successor to our AWP03 series Wall Packs, **now power and colour selectable!**
Ideal for building entrances, multi-use facilities, apartment buildings, institutions, schools, and more


Power Selectable
10W/20W/30W/40W

Adjustable 0-90°
for precise aiming



Durable Die-Cast
Aluminum Housing

Colour Selectable
3000K/4000K/5000K

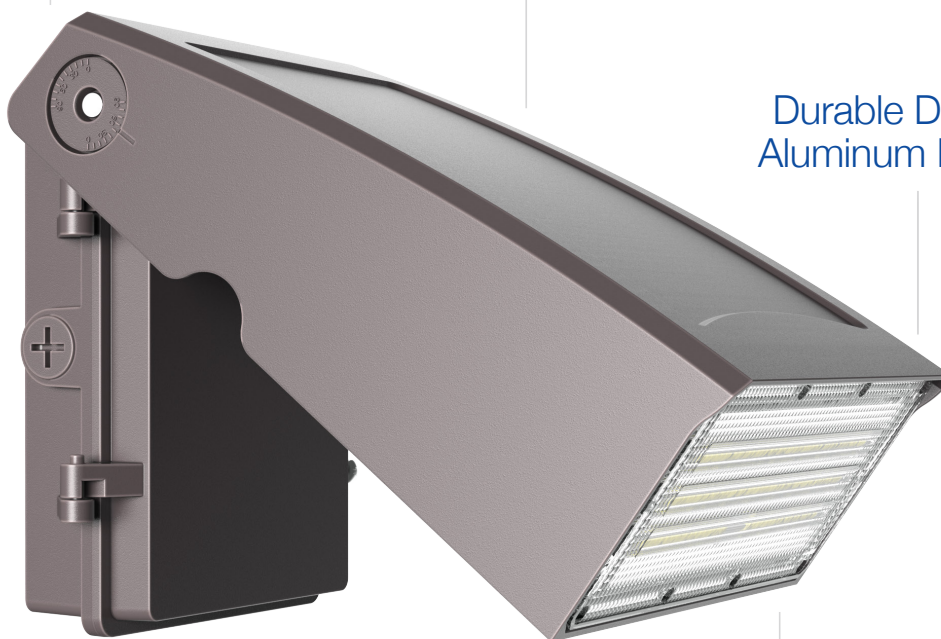

Standard Junction
Box Mount
with facility for photocell
(sold separately)

Built-in Water
Drainage

UV-Resistant Polycarbonate
Refractor Lens
with Type II distribution

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	5,059 lm
Efficacy	126.47 lm/W
CCT	3000K/4000K/5000K
CRI	72
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year


APPROVALS AND LISTINGS

cETL	5018387
DLC Premium	S-0W9LD6

ISOCANDELA PLOT

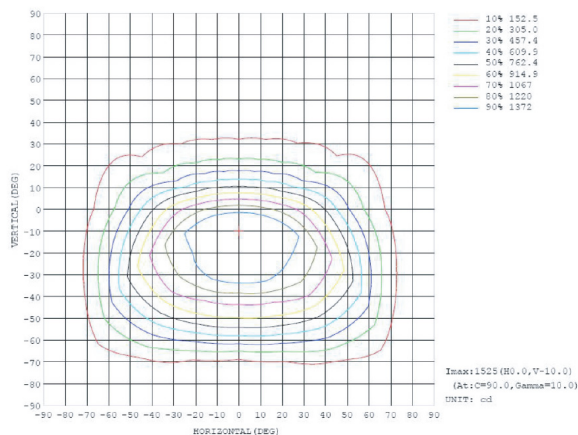

LUMINOUS INTENSITY DISTRIBUTION

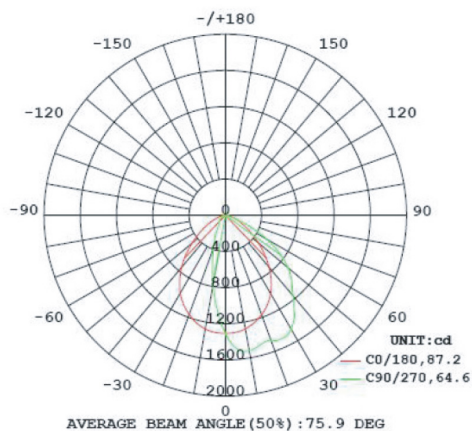


ELECTRICAL

Wattage	10W/20W/30W/40W
Voltage	120-347V
Current	0.45A
Power Factor	0.9
THD	15%
Operating Temp	-30 to 45°C


CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Bronze
IP Rating	IP65
Net Weight	1.59 kg
Gross Weight	1.92 kg
Carton Qty	1
Master Carton Dimensions	330 x 245 x 150 mm

DIMENSIONS

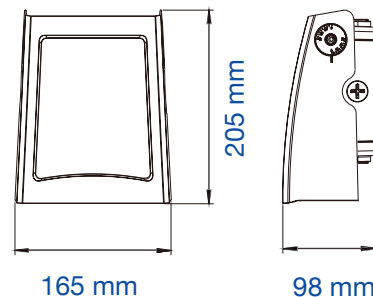

SPECTRORADIOMETRIC PARAMETERS

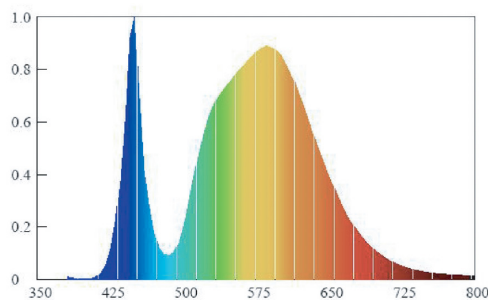

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com