

CP02 Canopy Light

35W, 45W, 65W, 75W Selectable | 4000K | 120-277V

Ideal for parking structures, pool areas, gas stations, walkways, warehouses, barns, canopies and more. Suitable for damp/wet locations or wherever a high impact-resistant fixture is required



TECHNICAL DATA



LIGHT SPECIFICATIONS


Lumens	9,750 lm @ 75W
Efficacy	130 lm/W
CCT	4000K
CRI	83
L70 Life	50,000 hrs
Warranty	5-year
Beam Angle	140°
Dimmable	0-10V

APPROVALS AND LISTINGS

cUL	E482965
-----	---------


ILLUMINANCE AT A DISTANCE

Note: Plotted @ 75W

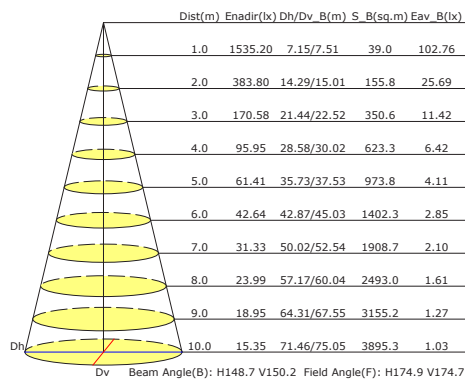

ISOCANDELA

Note: Plotted @ 75W

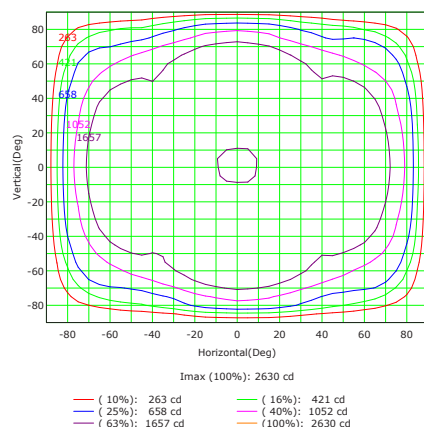

ELECTRICAL

Wattage	35W / 45W / 65W / 75W
Voltage	120-277V
Power Factor	>0.9
THD	15%
Operating Temp	-40 to 40°C

CONSTRUCTION

Housing	Aluminum Alloy
Finish	White
IP Rating	IP65
Carton Qty	4
Carton Dimensions	395 x 270 x 275 mm

DIMENSIONS

