

CWP05 Wall Pack

20W/30W/40W | 3CCT | 120-347V



Meet the successor to our best-selling CWP04 Wall Packs!
Ideal for entryway and exterior security lighting. Easy installation and maintenance with colour temperature and voltage options



Power Selectable

20W / 30W / 40W

Colour Selectable

3000K / 4000K / 5000K

120-347V
Universal Driver

0-10V dimming



Motion Sensor
Compatible

sold separately

Borosilicate
Glass Lens

Built-in Photocell

unplug to bypass

Optional
Wire Guard
and Visor

sold separately

TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	138.7lm/W
CCT	3000K/4000K/5000K
CRI	81
Distribution	105°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	40W 4000K Photocell ON

LUMEN OUTPUT			
	3000K	4000K	5000K
20W	3054 lm	3169 lm	3244 lm
30W	4432 lm	4646 lm	4713 lm
40W	5967 lm	6279 lm	5993 lm


APPROVALS & LISTINGS

cUL	E482965
DLC Premium	S-FW3HF9

DIMENSIONS AND WEIGHTS

Fixture Weight	7.5 lbs
Fixture Dimensions	14.2 x 8.6 x 6.5 in
Carton Qty	1
Carton Weight	9.9 lbs
Carton Dimensions	16.1 x 11.4 x 9.4 in

DIMENSIONAL DRAWINGS (IN)

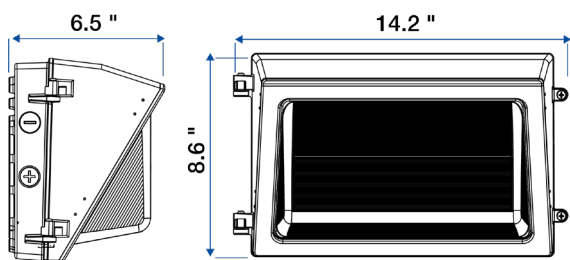

ELECTRICAL

Wattage	20W/30W/40W
Voltage	120-347V
Current	0.4A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Borosilicate Glass
Finish	Powder Coated
Finish Colour	Bronze
IP Rating	IP65

ACCESSORIES (Sold Separately)

Wire Guard	CWP05-WG
Visor	CWP05-VISOR
Motion Sensor	HB01DMS-C
Motion Sensor Remote	MS04-RC

NOTE: MS04-RC is required for the Motion Sensor to function

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833