

CYL Cylinders

21W/28W/35W | 4CCT | 120-347V

Suitable for use in restaurants, foyers, theatres,
retail stores, entryways, hotels, and more

Colour Selectable

2700K / 3000K / 3500K / 4000K

Adjustable Beam Angle

30° / 40° / 50° / 60°

White Powder
Coat Finish

Power Selectable

21W / 28W / 35W

120-347V
Universal Driver

0-10V dimming



Pendant
Mounted*



Surface
Mounted



*Pendant Mount sold separately

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	2857 lm
Efficacy	81.81 lm/W
CCT	2700K/3000K/3500K/4000K
CRI	>80
Beam Angle	30°/40°/50°/60°
Dimmable	0-10V
L70 Life	>54,000 hrs
Warranty	5-year

LUMEN OUTPUT				
35W	30°	40°	50°	60°
2700K	2370 lm	2620 lm	2743 lm	2857 lm
3000K	2718 lm	2879 lm	3091 lm	3147 lm
3500K	2863 lm	3076 lm	3260 lm	3476 lm
4000K	2766 lm	2956 lm	3116 lm	3413 lm

APPROVALS & LISTINGS

cUL E482965

DIMENSIONS AND WEIGHTS

Fixture Weight	2.86 lbs
Fixture Dimensions	5.75 x 5.75 x 7.2 in
Carton Qty	1
Carton Weight	3.3 lbs
Carton Dimensions	6.1 x 6.1 x 7.48 in
Master Carton Qty	4
Master Carton Weight	15.4 lbs
Master Carton Dimensions	13 x 13 x 8.27 in

KITS AND MOUNTING (Sold Separately)

CYL-S-KIT-WH Pendant Mount (8ft cable - White)


ELECTRICAL

Wattage	21W/28W/35W
Voltage	120-347V
Current	<0.45A
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	≥0.9
THD	≤20%
Operating Temp	-40 to 50°C

CONSTRUCTION

Cord Whip	7.87"
Housing	Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	White
IP Rating	IP40

DIMENSIONAL DRAWINGS (IN)

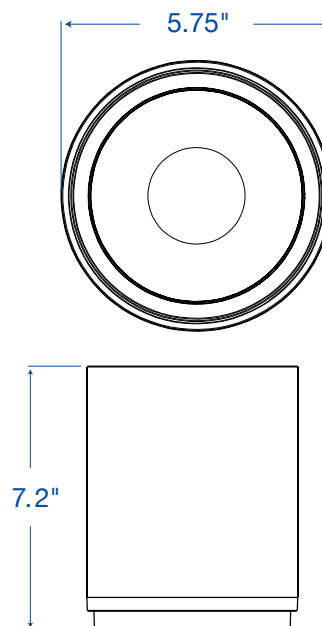

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833