

FL04B Flood / Area Light

450W | 4000K | 120-347V




TRUE UNIVERSAL POWER INPUT FROM 120-347V!

A versatile, clean, and modern appearance
that brings a pleasing aesthetic to any project

Removable Access Plate

for easy field installation of
twist lock photocell receptacle

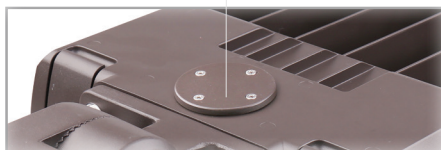

Type III Polycarbonate Optics

Type IV and V available

Rugged Die Cast Aluminum Housing (Bronze)



Pressure Relief Respirator

for expansion/contraction

Complete with Trunnion

Interchangeable mounting
options sold separately

Quick-Release, Hinged Access Cover

for control compartment

Accessories (Ordered Separately):

Yoke Mount, Slip Fit, Pole Mount, Multi Mount, Motion Sensor
Remote, Motion Sensor, Photocell and Receptacle, Shield



FL04-YK-HG



FL04-SF



FL04-PM



FL04-MM



HB01R



HB01DMS-B

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	62,228 lm
Efficacy	138 lm/W
CCT	4000K
CRI	> 70
L70 Life	> 54,000 hrs
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
-----	---------

DIMENSIONS (SHOWN WITH TRUNNION MOUNT)

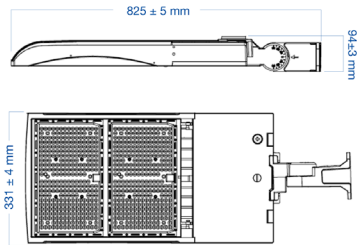

ELECTRICAL

Wattage	450W
Voltage	120-347V
Power Factor	> 0.9
THD	< 15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Cover	Polycarbonate
Finish	Bronze
IP Rating	IP65
EPA	2.31 ft²
Net Weight	9.32 kg
Gross Weight	10.32 kg
Carton Qty	1
Carton Dimensions	915 x 380 x 155 mm

ACCESSORIES (SOLD SEPARATELY)

Slip Fit	FL04-SF
Pole Mount	FL04-PM
Multi Mount	FL04-MM
Yoke Mount	FL04-YK-HG
Motion Sensor	HB01DMS-B
Motion Sensor Remote	HB01R
Photocell and Receptacle for 120-277V sites	JL-200 and JL-205LV
Photocell and Receptacle for 277-480V sites	JL-200 and JL-207E
Shield	FL04B-SHIELD-LG