

## **Photocell**

Suitable for use with fixtures with a 12V auxiliary driver output including the 120-347V AWP03 Architectural Wall Pack series





Pictured on the AWP03

## **TECHNICAL PARAMETERS**

Voltage	10.5-15VDC (Currect Required>30mA)
Operating Temp	-20°C to 60°C
IP Rating	IP65
Dimensions	44.2 x 44.2 x 31.3 mm

## ACCESSORIES (SOLD SEPARATELY)

HD06-TUBE	Tube Extension
-----------	----------------

Tube Extension (sold separately)




## LIGHT DETECTION

Preset Lux levels - 2lx(default)/10lx.

The fixture will automatically turn on when ambient brightness is lower than the preset level (2lx).

The fixture will automatically turn off when ambient brightness is 10 times higher than the preset level.

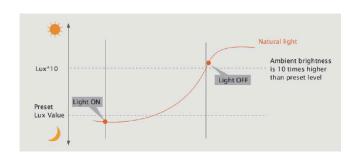

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com

