CSCLED

VAPOUR-PROOF FIXTURE
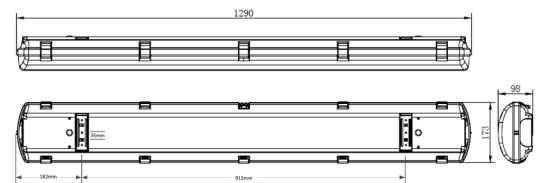
For use with CSC LED Smart Tube

Specification-grade vapour-proof LED fixture
Ideal for parking structures, warehouses, and more

Corrosion, flame, and vandal resistant

Top grade UV stabilized
Bayer Makrolon polycarbonate
construction with
high thermal resistance

Ultra-low V2
flammability rating
- resists
welding spatter

RoHS Compliant

c UL us LISTED

1290
98
182mm   912mm

smarttube sold separately

NANO TUBE: UL TYPE 1 & B IN A SINGLE SMART TUBE
Shatter-proof - DLC listed

4000K: CSC-T8-18W-120-GTB-40K-PL
5000K: CSC-T8-18W-120-GTB-50K-PL

SPECIFICATIONS

Voltage	120-277V
Operating temp	-30 to 50°
Housing	Polymer
Colour	Grey
IP rating	IP65
Warranty	10-year
Carton qty	6