

1'x 4' Panel

20W, 30W, 40W Selectable | 3CCT | 120-347V

High performance, light-weight luminaires suitable for lay-in, surface or pendant mounting.
Ideal for use in schools, health care applications, offices, retail spaces, and more

Less than 1.8" Deep
ideal for tight plenum areas

0-10V Dimming Lead on Both
Sides of Driver Junction Box



Non-yellowing
Frosted Lens



120-347V, 0-10V
Dimmable Driver




Colour Selectable
(3500K/4000K/5000K)

Power Selectable
(20W / 30W / 40W)

Seismic Clips
Included

Waffle Stamping
increases heat dissipation and driver life

Use Switches to Select
Power & Colour

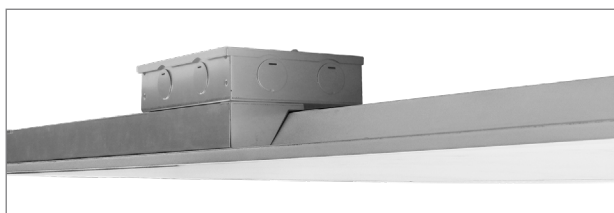

Junction Box (PLS-JB)
sold separately

Accessories (Sold Separately)



Suspension Kit
PLS-SUSKIT



Surface Mount Kit
PLS14-SK



Junction Box
PLS-JB



Recessed Frame Kit
PLS14-RFK

TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	111 lm/W
CCT	3500K/4000K/5000K
CRI	84
Dimmable	0-10V
Beam Angle	120°
L70 Life	>54,000 hrs
Warranty	7-year

LUMEN OUTPUT			
	3500K	4000K	5000K
20W	2646 lm	2730 lm	2656 lm
30W	3689 lm	3891 lm	3766 lm
40W	4335 lm	4697 lm	4361 lm

APPROVALS AND LISTINGS

ETL	5000444
DLC	S-GTIYLV

DIMENSIONAL DRAWINGS (IN)

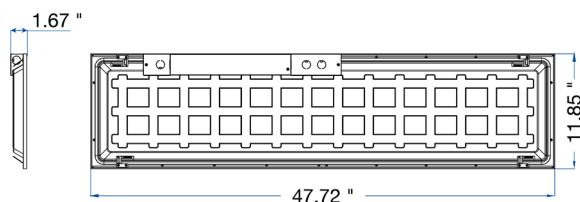

ELECTRICAL

Wattage	Selectable (20W/30W/40W)
Voltage	120-347V
Power Factor	0.93
Current	0.44A
THD	<20%
Operating Temp	-20 to 40°C

CONSTRUCTION

Housing	Metal
Finish	Polyester Powder Coat
Finish Colour	White
IP Rating	IP20

DIMENSIONS & WEIGHTS

Fixture Weight	4.4 lbs
Fixture Dimensions	47.72 x 1.67 x 11.85
Carton Qty	4 pcs
Carton Weight	19.5 lbs
Carton Dimensions	48.7" x 7" x 13.1"

ACCESSORIES (SOLD SEPARATELY)

PLS14-SK	Surface Mount Kit
PLS14-RFK	Recessed Frame Kit
PLS-SUSKIT	Suspension Kit
PLS-JB	Junction Box