

Pole Top Area Light

55W | Colour Selectable | 120-347V

Elegant look and design

Ideal for parking lots, pathways, parks, retail settings, and more

Colour Selectable
3000K / 4000K / 5000K

0-10V Dimmable

Polyester
Powder-Coat Finish
Bronze

Instant Start



High-Efficiency
Optics
with type 5 distribution



Easily Adjustable

Fits Up To 2 3/4" OD pole

NOTE: Photocell Receptacle, Photocell, and Shorting Cap are sold separately. If pre-installation of the Photocell Receptacle is required before shipping, please contact us (info@csc-led.com) for a quote.

TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	121.45 lm/W @ 3000K
CCT	3000K / 4000K / 5000K
CRI	80
Distribution	Type V
Beam Angle	90°
Dimmable	0-10V
L70 Life	>50,000 hours
Warranty	10-year
Factory Settings	55W 4000K

LUMEN OUTPUT TABLE

	3000K	4000K	5000K
55W	6892 lm	7502 lm	7283 lm

DIMENSIONS AND WEIGHTS

Fixture Weight	10.12 lbs
Fixture Dimensions	13.4 x 13.4 x 7.3 in
Carton Qty	1
Carton Weight	12.54 lbs
Carton Dimensions	28.7 x 20.3 x 7.1 in

APPROVALS AND LISTINGS

cUL	E482965
DLC	S-JHB85F

ELECTRICAL

Wattage	55W
Voltage	120-347V
Current	0.611A
Surge Protection	4kV
Auxiliary Output	N/A
Power Factor	0.9
THD	15 %
Operating temp	-40 to 50°C

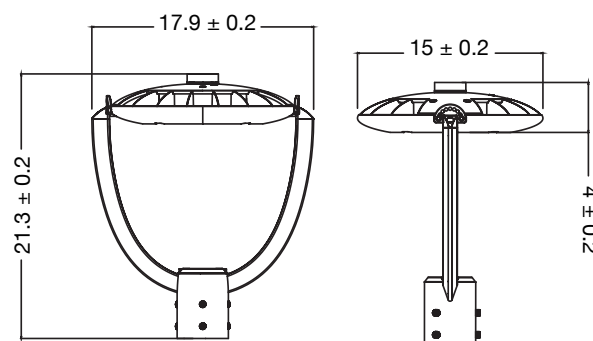
CONSTRUCTION

Cord Whip	13.78"
Housing	Aluminum
Finish	Powder coated
Finish Colour	Bronze
Lens	Polycarbonate
IP Rating	IP65

ACCESSORIES (SOLD SEPARATELY)

120-347V Photocell	JL-207E
120-277V Photocell	JL-205LV
Shorting Cap	JL-208
Photocell Receivable	JL-200

DIMENSIONAL DRAWING (IN)

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833