

NEMA 4X Vapour Tight

100W | 5000K | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



Low Glare
Frosted Lens

120-347V Driver



Conduit Entry
on both ends



304 Stainless
Steel Locking
Buckles

One Piece
Gear Tray
for quick access
to driver and
accessories



Accessories (Ordered Separately):
Motion Sensor (STVT-IMS or VTHB-IMS)



STVT-IMS



VTHB-IMS

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	13,750 lm
Efficacy	137.5 lm/W
CCT	5000K
CRI	83
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	PLAY2ISA5LR2

DIMENSIONS

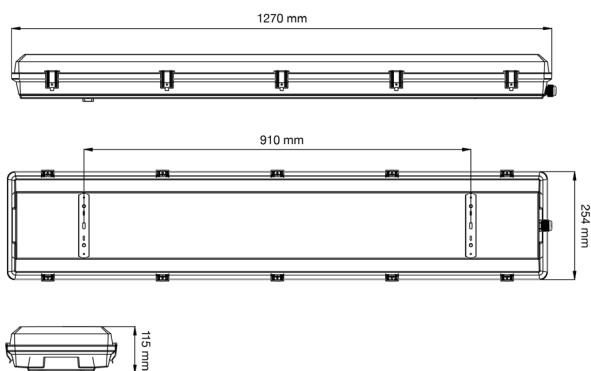

ISOCANDELA

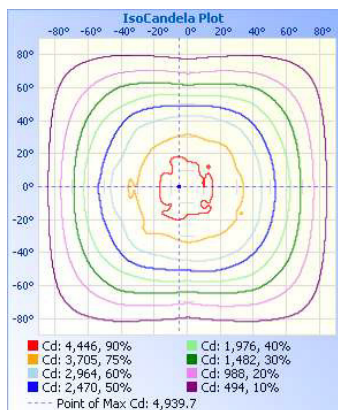

ELECTRICAL

Wattage	100W
Voltage	120-347V
Power Factor	0.92
THD	12.13%
Operating Temp	-35 to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1270 x 254 x 115 mm
Ctn Qty	1

ACCESSORIES (Ordered Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

NOTE: VTHB-IMS can be mounted over 4 metres.
STVT-IMS can be mounted at a max height of 4 metres.



VTHB-IMS



STVT-IMS

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
3.3ft	426 fc	7.9 ft	9.0 ft
6.7ft	103 fc	16.0 ft	18.2 ft
10.0ft	46.4 fc	23.8 ft	27.2 ft
13.3ft	26.2 fc	31.7 ft	36.2 ft
16.7ft	16.6 fc	39.8 ft	45.5 ft
20.0ft	11.6 fc	47.6 ft	54.4 ft

■ Vert. Spread: 100.0°
■ Horiz. Spread: 107.4°