

NEMA 4X Vapour Tight

150W | 5000K | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



Low Glare
Frosted Lens

120-347V Driver



Conduit Entry
on both ends

304 Stainless
Steel Locking
Buckles

One Piece
Gear Tray
for quick access
to driver and
accessories



Accessories (Ordered Separately):
Motion Sensor (STVT-IMS or VTHB-IMS)



STVT-IMS



VTHB-IMS

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	20,400 lm
Efficacy	136 lm/W
CCT	5000K
CRI	83
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	PLYNPQ9V2UNZ

ILLUMINANCE AT A DISTANCE

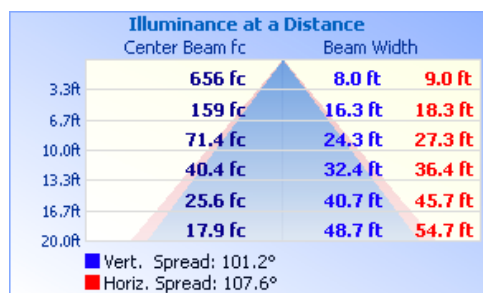

ISOCANDELA

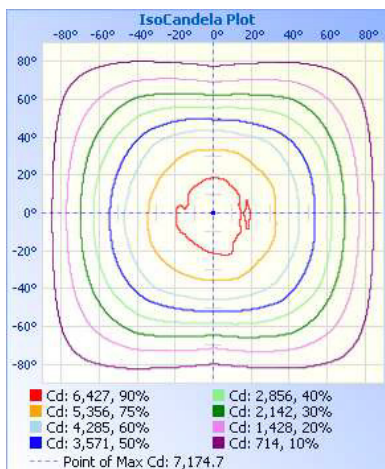

ELECTRICAL

Wattage	150W
Voltage	120-347V
Power Factor	0.9
THD	18%
Operating Temp	-35 to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1270 x 254 x 115 mm
Ctn Qty	1

ACCESSORIES (Ordered Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

NOTE: VTHB-IMS can be mounted over 4 metres.
STVT-IMS can be mounted at a max height of 4 metres.




VTHB-IMS



STVT-IMS

DIMENSIONS

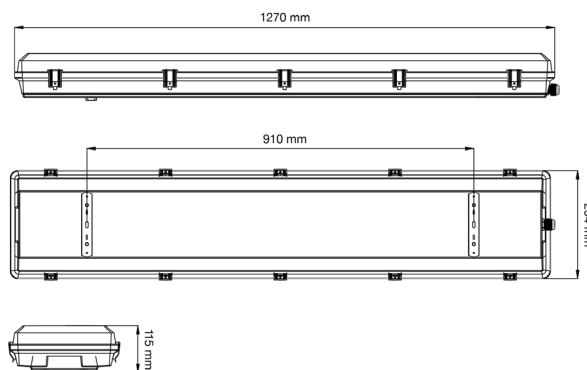

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com