

NEMA 4X Vapour Tight

Power Selectable | Colour Selectable | 120-347V

Ideal for parking garages, car washes, industrial applications, food processing plants, paint shops, and other harsh environments



One Piece Gear Tray
for quick access to driver
and accessories

Stainless Steel
Spring Clips



Colour Selectable
3500K / 4000K / 5000K

120-347V
Universal
Driver

Polycarbonate
Low Glare Lens

Power Selectable
150W / 175W / 200W

1/2" NPT Entry



Accessories (Ordered Separately): Microwave Motion Sensor (MS01-MW-HW-DC), Emergency LED Driver (BLD-YT08D)



MS01-MW-HW-DC



BLD-YT08D

TECHNICAL DATA



LIGHT SPECIFICATIONS


Efficacy	135 lm/W
CCT	3500K / 4000K / 5000K
CRI	84
Beam Angle	110°
Dimmable	0-10V
Life	≥50,000 hrs
Warranty	5-year

LUMEN OUTPUT			
	3500K	4000K	5000K
150W	21892 lm	23393 lm	23256 lm
175W	25060 lm	26970 lm	26850 lm
200W	28379 lm	30950 lm	30934 lm

APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	S-Q06GYS, S-W30LGQ

ILLUMINANCE AT A DISTANCE

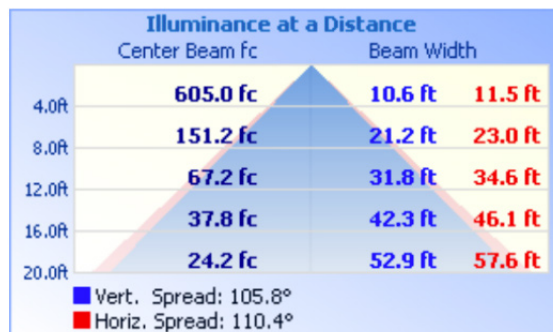

ELECTRICAL

Wattage	150W / 175W / 200W
Voltage	120-347V
Current	2.0A
Surge Protection	4kV
Auxiliary Output	12V
Power Factor	0.9
THD	12.7%
Operating Temp	-40°C to 55°C


CONSTRUCTION

Cord Whip	31.5"
Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP67

DIMENSIONS AND WEIGHTS

Fixture Weight	15 lbs
Fixture Dimensions	49.9 x 10 x 4.3 in
Carton Qty	1
Carton Gross Weight	17 lbs
Carton Dimensions	51 x 10.8 x 5.5 in

DIMENSIONAL DRAWING (IN)

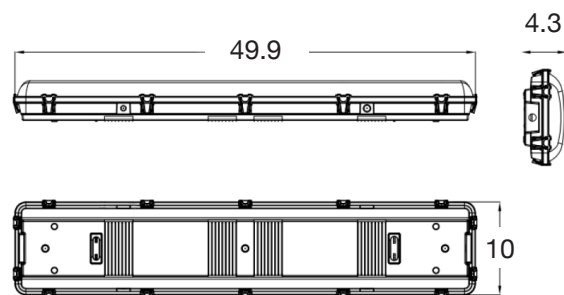

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833