

NEMA 4X Vapour Tight

65W | Colour Tunable | 120-347V | 4 ft



Ideal for parking garages, industrial applications, agricultural applications, food processing plants, paint shops, and other harsh environments



NEMA 4X



Colour Tunable
3500K/4000K/5000K


120-347V Driver

Low Glare
Frosted Lens



Conduit Entry
on both ends

Installation Brackets
can be slid anywhere
along the entire surface for
matching joist pattern

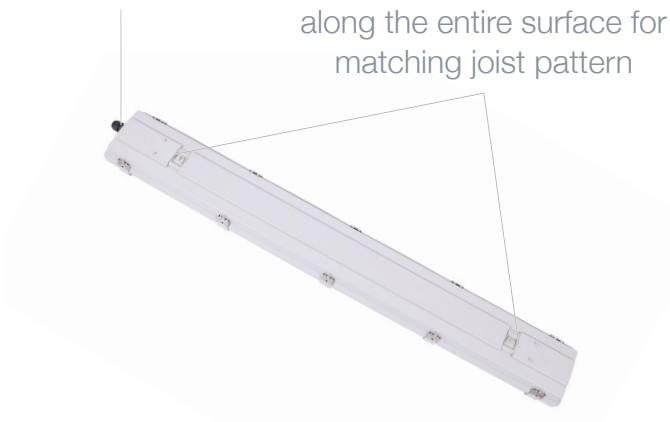

304 Stainless
Steel Locking
Buckles

One Piece
Gear Tray
for quick access
to driver and
accessories



Accessories (Ordered Separately):
Motion Sensor (STVT-IMS or VTHB-IMS)



STVT-IMS



VTHB-IMS

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	8,643 lm
Efficacy	126.87 lm/W
CCT	3500K, 4000K, 5000K
CRI	84.6
Dimmable	0-10V
Life	50,000 hrs
Warranty	5-year


APPROVALS AND LISTINGS

ETL	5001780
DLC Premium	PLF2IGOTWMPD

DIMENSIONS

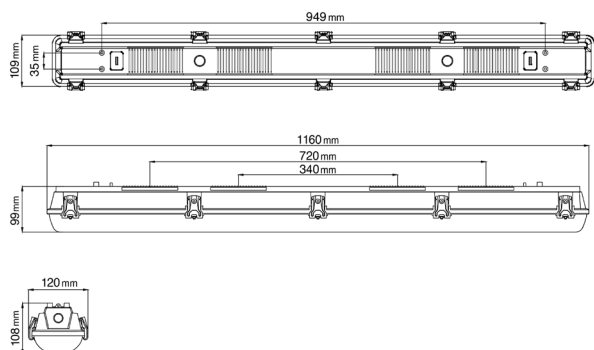

ISOCANDELA

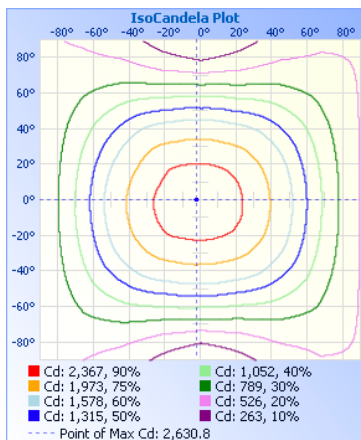

ELECTRICAL

Wattage	65W
Voltage	120-347V
Power Factor	0.96
THD	14.38%
Operating Temp	-35 to 40°C

CONSTRUCTION

Housing	Polycarbonate
Finish	White/Grey
Length	4 ft
IP Rating	IP66
Product Dimensions	1160 x 120 x 109 mm
Ctn Qty	4
Carton Dimensions	382 x 382 x 196 mm

ACCESSORIES (Ordered Separately)

VTHB-IMS	Motion Sensor
STVT-IMS	Motion Sensor

NOTE: VTHB-IMS can be mounted over 4 metres.
STVT-IMS can be mounted at a max height of 4 metres.



VTHB-IMS



STVT-IMS

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
3.3ft	241 fc	8.7 ft	11.9 ft
6.7ft	58.5 fc	17.7 ft	24.2 ft
10.0ft	26.3 fc	26.4 ft	36.2 ft
13.3ft	14.9 fc	35.1 ft	48.1 ft
16.7ft	9.42 fc	44.1 ft	60.4 ft
20.0ft	6.57 fc	52.8 ft	72.3 ft

■ Vert. Spread: 105.7°
■ Horiz. Spread: 122.1°