

Wall Cylinder

30W | RGBW | 120-277V



Suitable for indoor and outdoor applications including retail stores, event spaces, hospitality venues, condominiums, building entrances, and more!

120-277V
0-10V dimming

Powder Coat Finish
black

Remote Control Included
for colour and operating
mode selection



16 Colours
and 5 operating modes

Cylinder Rings Illuminate

Direct / Indirect
50% uplight, 50% downlight

Packaged in
Eco-friendly
Packaging
without plastic

TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy*	41 lm/W
CCT	RGBW
CRI	>80
Distribution	Direct / Indirect (50% downlight, 50% uplight)
Beam Angle	60°
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	30W White

*When set to White

LUMEN OUTPUT				
	Red	Green	Blue	White
30W	270 lm	899 lm	191 lm	1230 lm

APPROVALS & LISTINGS

cUL E482965

DIMENSIONS AND WEIGHTS

Fixture Weight	3.13 lbs
Fixture Dimensions	4.72 x 10.35 x 4.76 in
Master Carton Qty	6
Master Carton Weight	22.84 lbs
Master Carton Dimensions	16.14 x 11.81 x 11.42 in
Carton Qty	1
Carton Weight	3.44 lbs
Carton Dimensions	11.22 x 5.12 x 5.31 in


ELECTRICAL

Wattage	30W
Voltage	120-277V
Current	0.2A
Surge Protection	6kV
Auxiliary Output	N/A
Power Factor	0.9
THD	≤15%
Operating Temp	-40 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Glass
Finish	Powder Coated
Finish Colour	Black
IP Rating	IP65

DIMENSIONAL DRAWINGS (IN)

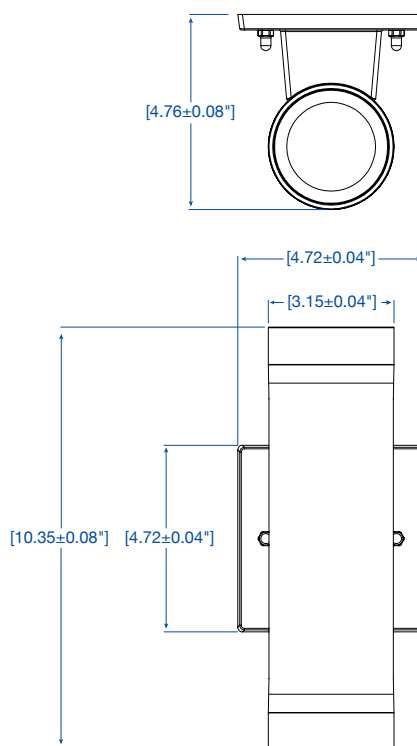

HEAD OFFICE: 8 - 540 Jamieson Pkwy, Cambridge, ON, N3C 0G5 | orders@csc-led.com | (519) 880 - 9833