

# Assembly Instruction Sheet #IS-1125P24 For Style 1125P24

**Tools Required:** Phillips screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Light Source:** (1) unswitched LED or CFL max watt (Not include).  
**Individual Assembly Time:** 15-30 minutes.  
**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams before to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, build, or operate the fixture. Contact customer service for replacement parts.

### Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

### Package Contents

- B Middle Rod
- A Fixture Body x1
- C Glass Shade x11
- B1 4"2pcs
- B2 6"1pcs
- B3 12"5pcs
- D Metal Ball Ø90 X7
- E Metal Ball Ø50 X7
- F Nibble 6" X7
- G Nibble 4" X7

### Hardware Contents

HW#	DESCRIPTION	QUANTITY
AA	Decorative Cap	4
BB	Decorative Cap	4
CC	Outlet Box	1
DD	Mounting Bracket	1
EE	Mounting Bracket	1
FF	Mounting Bracket	1
GG	Mounting Bracket	1

**STEP 1 - Install Rods to Fixture Body**  
 A. Thread the power cord to the Middle Rod, fix the Middle Rods with the fixture body then the same to connect the other pieces of Rods, finally fix the Canopy with the Rods.




**STEP 2 - Attach Mounting bracket to Outlet Box**  
 A. Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw facing you. Secure K Screws (CC). Tighten until snug.




**STEP 3 - Fit Ceiling Canopy to Mounting bracket Assembly**  
 A. Fit the Ceiling Canopy to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The Ceiling Canopy should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the Ceiling Canopy is secure, remove the Decorative Caps (AA) and Ceiling Canopy and proceed to Step 4.




**STEP 4 - Wire Connections**  
 A. Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully seal all the connected wires into the Outlet Box.

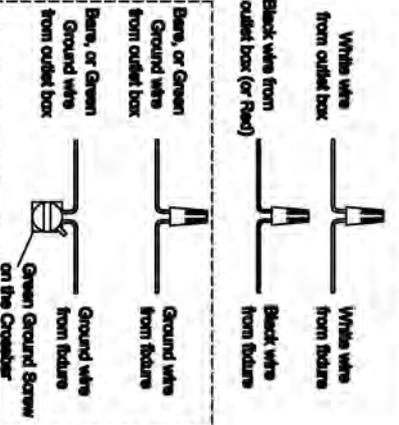

**STEP 5 - Install Ceiling Canopy to Ceiling**  
 A. Carefully tuck all wires into the outlet box and position the Ceiling Canopy of the Fixture Body (A) over the outlet box. Align the holes in the Ceiling Canopy with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug.

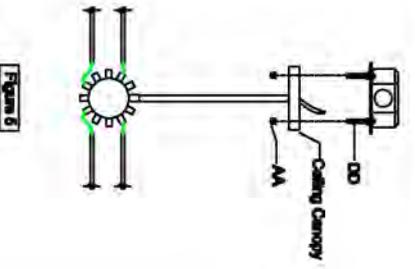

**STEP 6 - Install bulb and Glass Shade Metal Ball.**  
 A. Color all the extra wires and put them into the bulb then lock the arms with the Ball one by one and fix them with screw.  
 B. Install bulbs (Not include) the sockets and screw and fix place.  
 C. Please put the Glass Shade Metal Ball to the Fixture Body (A).

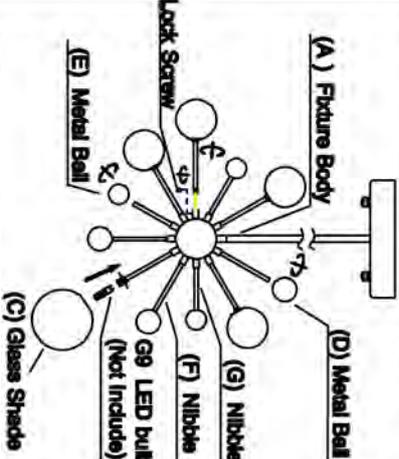

- C Glass Shade x11
- D Metal Ball Ø90 X7
- E Metal Ball Ø50 X7
- F Nibble 6" X7
- G Nibble 4" X7

