

Assembly Instruction Sheet #IS-1125P24 For Style 1125P24

Tools Required: Phillips screwdriver, Philips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.
Light Source: (11) assembled LED or incandescent (Not Include)
Estimated Assembly Time: 15-20 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

A) Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation. Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

B) Middle Rod	A) Fixture Body x1
B1 4"2pcs	C) Glass Shade x11
B2 6"1pcs	D) Metal Ball Ø90 x7
B3 12"5pcs	E) Metal Ball Ø50 x7
	F) Nibble 6" x7
	G) Nibble 4" x7

Part	Description	Quantity
AA	Decorative Caps	4pcs
BB	Decorative Caps	2pcs
CC	Outlet Box	1pc
DD	Mounting Bracket	1pc
EE	Mounting Screws	4pcs
FF	Mounting Screws	4pcs
GG	Mounting Screws	4pcs
HH	Mounting Screws	4pcs
II	Mounting Screws	4pcs
JJ	Mounting Screws	4pcs
KK	Mounting Screws	4pcs
LL	Mounting Screws	4pcs
MM	Mounting Screws	4pcs
NN	Mounting Screws	4pcs
OO	Mounting Screws	4pcs
PP	Mounting Screws	4pcs
QQ	Mounting Screws	4pcs
RR	Mounting Screws	4pcs
SS	Mounting Screws	4pcs
TT	Mounting Screws	4pcs
UU	Mounting Screws	4pcs
VV	Mounting Screws	4pcs
WW	Mounting Screws	4pcs
XX	Mounting Screws	4pcs
YY	Mounting Screws	4pcs
ZZ	Mounting Screws	4pcs

STEP 1 – Install Rods to Fixture Body
A) Thread the power cord to the Middle Rod, fix the Middle Rod with the Fixture Body. Then the same to connect the other pieces of Rods, finally fix the Canopy with the Rods.




Figure 1

STEP 2 – Attach Mounting bracket to Outlet Box
A) Pass the supply wires through the Mounting bracket (EE). Attach the Mounting bracket (EE) to the Outlet Box with the head of the Green Ground Screw (CC). Secure it with the Screws (CC). Tighten until snug.




Figure 2

STEP 3 – Fit Ceiling Canopy to Mounting bracket Assembly
A) Fit the Ceiling Canopy to Mounting Screws (DD) and secure with Decorative Caps (AA). Note: The Ceiling Canopy should be snug against the ceiling and the Decorative Caps (AA). If not, adjust the length of the Mounting Screws (DD) by unscrewing the Hex Nut and Lock Washer and then screwing Mounting Screws (DD) in or out of the Mounting bracket (EE) until the correct length is achieved. Once the Ceiling Canopy is secure, remove the Decorative Caps (AA) and Ceiling Canopy and proceed to Step 4.




Figure 3

STEP 4 – Wire Connections
A) Use standard wire connections to make all wire connections. Twist connections until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully seal all the connected wires into the Outlet Box.

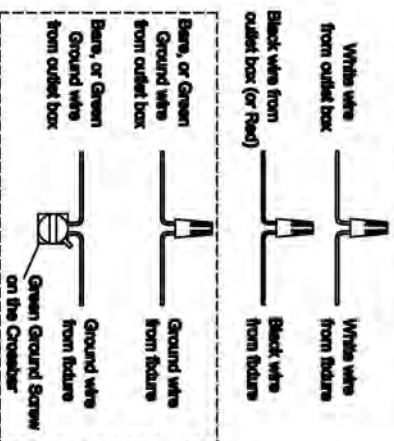


Figure 4

STEP 5 – Install Ceiling Canopy to Ceiling
A) Carefully push all wires into the outlet box and position the Ceiling Canopy of the Fixture Body (A) over the outlet box. Align the holes in the Ceiling Canopy with the Mounting Screws (DD). Secure with Decorative Caps (AA) and hand tighten until snug.




Figure 5

STEP 6 – Install bulb and Glass Shade, Metal Ball.
A) Collect all the extra wires and put them into the bulb then lock the arms with the Ball one by one and fix them with screws.
B) Install bulbs (Not Include) into sockets and screw into place.
C) Remove put the Glass Shade, Metal Ball to the Fixture Body (A).

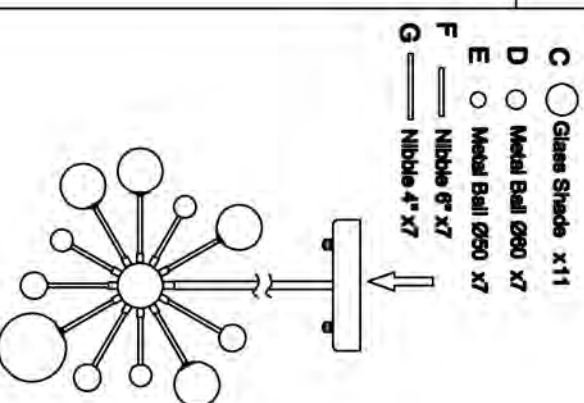
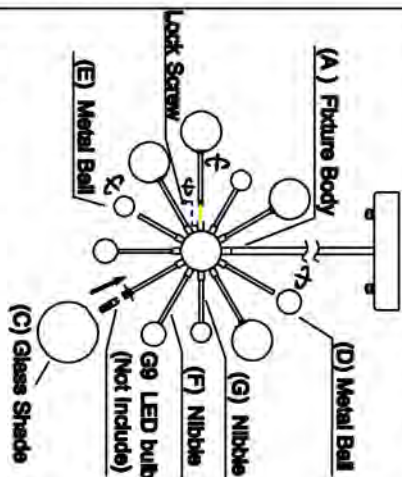


Figure 6