

# Assembly Instruction Sheet #IS-5464P40DB-12

## For Style 5464P40DB-12

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.  
**Light Source:** (12) E12 Candelabra Base Bulbs 60W Maximum(Not Include).

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

### ⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture.

We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

### Package Contents

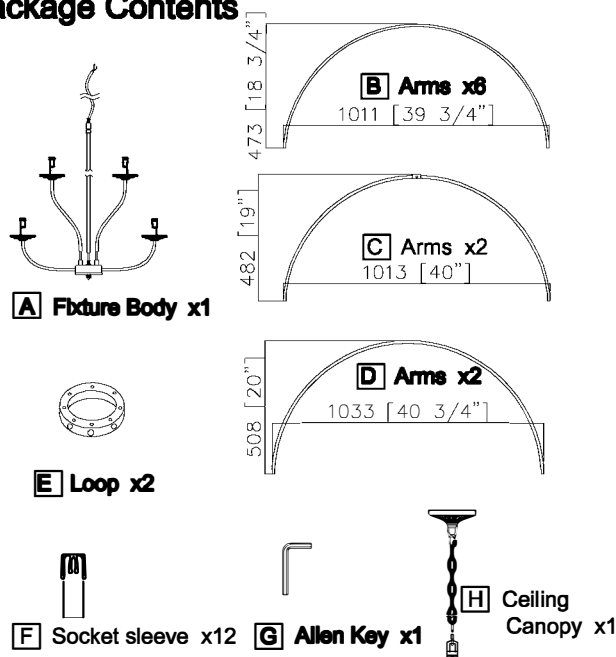

### Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Canopy Lock Ring	1pcs
BB	Wire nut	3pcs
CC	Canopy Chain Loop	1pcs
DD	Crossbar	1pcs
EE	J- Box Screw	2pcs

AA	BB	CC	DD	EE

### STEP 1 -Assemble the Bird Case and the Fixture Body.

A.Insert one ends of Arms B and Arms C into the loop E, and use the Allen Key G to tighten them with screws.

B.Line up the holes on Arms D and the holes on Arms C ,use the screws to connect them .Also line up the holes on Arms B and the holes on Arms D , use the screws to connect them .

