

Assembly Instruction Sheet #IS-9966P23-5

For Style 9966P23-5

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (5) E26 Base Bulb 60W Maximum (Not Include).

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.

⚠ Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture.

We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

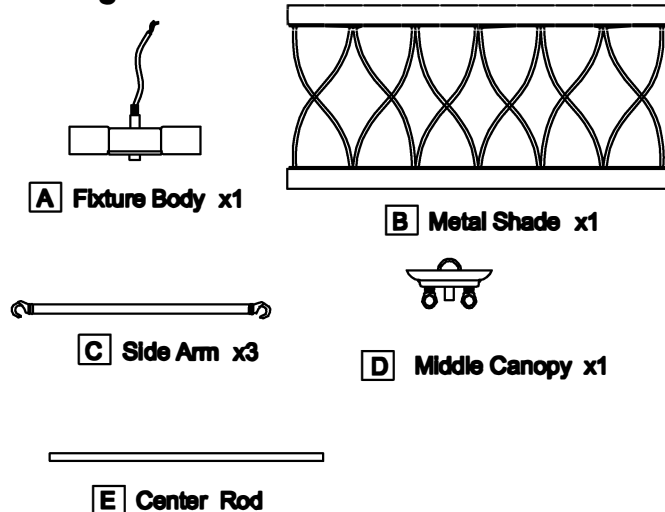

Hardware Contents

PART	DESCRIPTION	QUANTITY
AA	Canopy Lock Ring	1pcs
BB	Wire nut	3pcs
CC	Canopy Chain Loop	1pcs
DD	Crossbar	1pcs
EE	Outlet Box Screw	2pcs

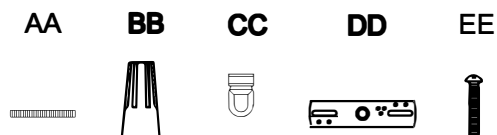

STEP 1 -Install Side Arms to Fixture Body

A. Thread the power cord in the Fixture Body (A) through the Center Rod (E) and Middle Canopy (D), then connect the Fixture Body (A), Center Rod (E) and Middle Canopy (D) together then tighten.

B. Assemble the Side Arms Like belowing picture showing to connect the Middle Canopy (D) and Metal Shade (B) together.

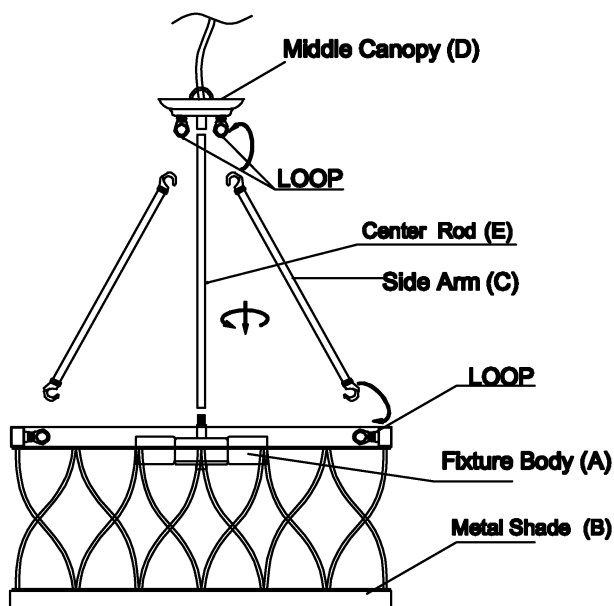


Figure 1