


MODEL NAME **LEDWALL-A
ADEN**

Round Cylinder With Multiple Lighting Options

The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.



PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

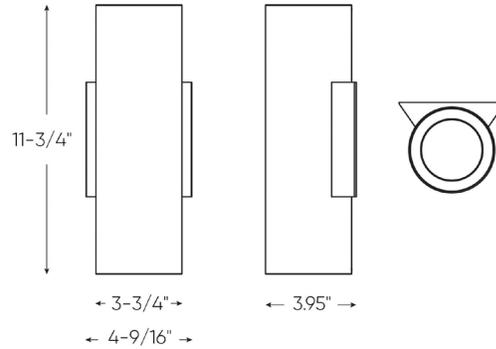


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	LIGHT DIRECTION	FINISH
4"	29W	2100lm	3000K	90	120V-277V	45° or 115°	Up and down	● Black

*Lumen output measured at 3000K

LIGHT DISTRIBUTION



CONSTRUCTION

Lens Clear or frosted	Finish type Powder coated	Type of LED COB
Lens material Glass	Housing material Aluminum	Mounting Octo Jbox

RATINGS

Placement Indoor/outdoor	Lifespan 50,000 hrs.	IP rating IP65
Location Wet	Certifications ETL, JA8, ES, ADA	Operating temperature -30° to 40° C

WHAT'S IN THE BOX

- LED wall sconce fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

ACCESSORIES

-

ADAPTERS

-



**ELECTRICAL
DETAILS**

Input voltage
120-277V

Output current
700mA

Power factor
90%

Driver type
Constant current

Output voltage
24-42V

LED model #
COB

**THD harmonic
distortion**
<20%

Binning type
3 SCDM

FEATURES

Cylinder comes with 3 optical options:
• Bright aluminum reflector that provides a 45° beam spread
• Frosted glass lens

to allow a wider beam spread
• Die-cast aluminum cap to allow a down light only version

Cylindrical housing made of extruded aluminum

The LED board is sealed with a clear tempered

glass lens to ensure weatherproof operation

Driver installs in junction box

Not compatible with shallow junction boxes

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to info@dals.com.

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	7	100	10
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	1	100	9
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	3	100	9
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	4
Lutron	DVSTV (0-10 V Controls)	960W, 8 A, 120-277V	Compatible	12	93	33

* Minimal buzzing noise may occur with some dimmers