

**MODEL NAME** **LEDWALL-G-CC**  
**GENEVA**

**Square Directional Wall Sconce**


Imagine being able to manually control the amount of light spread coming from both the top and bottom of your lighting fixture. This is now possible with our LED wall sconce.



**PROJECT:** \_\_\_\_\_ **TYPE:** \_\_\_\_\_

**DATE:** \_\_\_\_\_ **QTY:** \_\_\_\_\_

**NOTES:**

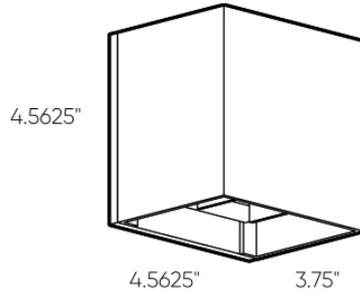


**QUICK SPECS**

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	LIGHT DIRECTION	FINISH
4.5"	14W	600lm	2700K 3000K 3500K 4000K 5000K	90	120V	92°	Up and down	● Black ○ White

\*Lumen output measured at 3000K

**LIGHT DISTRIBUTION**



**CONSTRUCTION**

<b>Lens</b> Clear lens	<b>Finish type</b> Powder coated	<b>Type of LED</b> COB
<b>Lens material</b> Plastic	<b>Housing material</b> Aluminum	<b>Mounting</b> Octo Jbox

**RATINGS**

<b>Location</b> Indoor/outdoor	<b>Lifespan</b> 50,000 hrs.	<b>IP rating</b> IP65
<b>Environment</b> Wet	<b>Certifications</b> ETL, FCC, ICES, ADA	<b>Operating temperature</b> -20° to 40° C

**WHAT'S IN THE BOX**

- LED wall sconce fixture
- Mounting bracket
- Mounting hardware
- Wire nuts
- Instruction sheet

**ACCESSORIES**

-

**ADAPTERS**

-



**ELECTRICAL  
DETAILS**

**Input voltage**  
120V

**Output current**  
315mA

**Power factor**  
98%

**Driver type**  
Constant current

**Output voltage**  
30-42V

**LED model #**  
COB

**THD harmonic  
distortion**  
<30%

**Binning type**  
3 SDCM

**FEATURES**

Integrated dimmable driver

Easily adjustable lighting angle from 0° to 92°

Switch-selectable CCT:  
2700K/ 3000 K/ 3500 K/  
4000 K/ 5000 K

Separately adjustable up and down lighting

Low power consumption

**WARRANTY**

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALS customer service call 1-877-430-1818 or send an e-mail to [info@dals.com](mailto:info@dals.com).

**RECOMMENDED DIMMER LIST\***

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Dals	SM-DIMSW Smart Dimmer	Triac, 250W LED/CFL	Compatible	6	100	18
Lutron	DVCL-153PR-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	7	100	11
Lutron	CTCL-153PDH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	7	100	11
Lutron	STCL-153PH-WH-C	Triac, 150 W Dimmable CFL/LED	Compatible	2	100	11
Lutron	DVWCL-153PH-WHC	Triac, 150 W Dimmable CFL/LED	Compatible	7	100	11
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	9	95	21
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	1	100	18
Lutron	Caseta PD-6WCL-WH-R-C	Triac, 150W Dimmable CFL/LED	Compatible	2	100	11
Lutron	Caseta PD-5NE-WH-C	ELV, LED—up to 250 W	Compatible	4	100	18
Lutron	Caseta	Triac, LED—up to 250 W	Compatible	1	100	18
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	29	100	11
Leviton	DSM10	Triac, 450W Dimmable CFL/LED	Compatible	25	100	32
Leviton	6674	Triac, 150 W Dimmable CFL/LED	Compatible	11	100	11
Leviton	IPL06-10Z	Triac, 150 W Dimmable CFL/LED	Compatible	18	100	11
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	13	100	21
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	9	100	32
Legrand	ADTP703TUM4	Triac, 450W Dimmable CFL/LED	Compatible	14	95	32
Legrand	ADPD453LM2	Triac, 450W Dimmable CFL/LED	Compatible	34	100	32
Legrand	RHL373PW	Triac, 250W LED	Compatible	9	100	18
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	9
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	100	14

\* Minimal buzzing noise may occur with some dimmers