



Arius Shoe Box

Outdoor Area

FEATURES

- Aluminum and steel construction
- 6 Mil powder coating with all stainless steel fasteners
- Instant on with no delay or warm up period
- Double steel tube with heavy-duty 1/2" fasteners
- Wet locations rated
- Flood light options



SPECIFICATIONS

Efficacy:

Up to 113.4 Lm/W

CRI:

83

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

180,000+ Life Hours (L70)

Voltage:

120/277V | 347/480V

Control Options:

0-10V Dimming

Operating Temperature:

-40°C to +45°C

Mounting Options:

Slip Fitter, U Bracket, Flem 6,
Flem 10

Wiring Options:

Black Flexible Cord
White Flexible Cord

Accessories:

Photo Control
10kV Surge Protection

OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
Arius SB 70	73.2	113.4	8306
Arius SB 90	92.4	112.8	10426
Arius SB 110	111.9	110.6	12391

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018


Specifications subject to change without notice.

DIMENSIONS

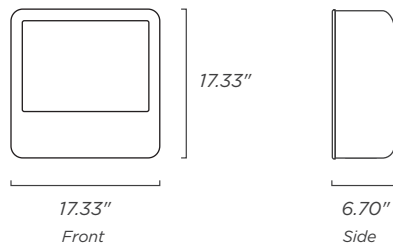


MOUNTING OPTIONS


Slip Fitter

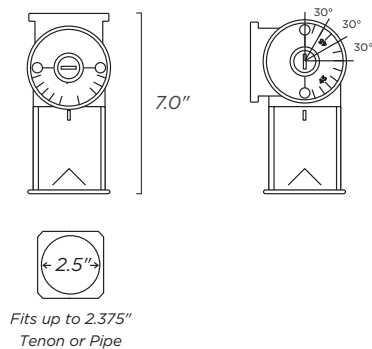

U-Bracket

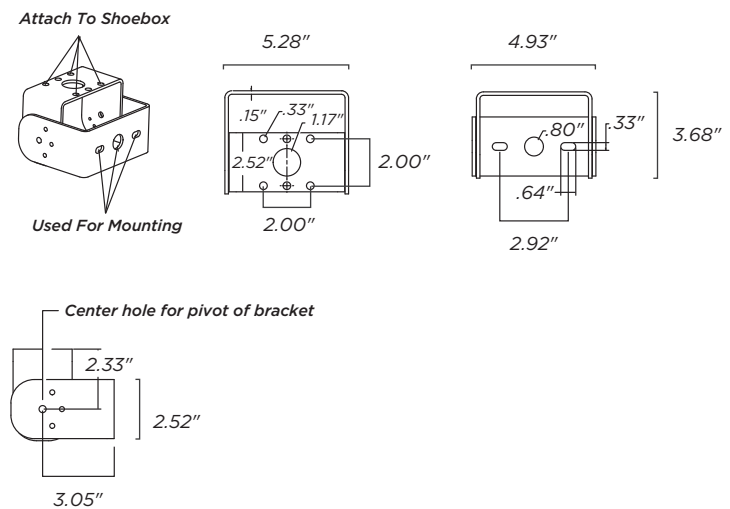

Flem 6, Flem 10

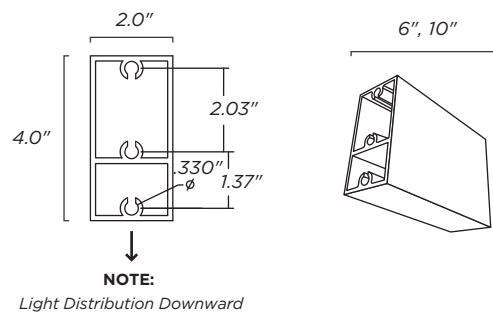

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	MOUNTING	WIRING
Arius SB	70	3K 3000K	U 120/277V	BRZ Bronze	UB U Bracket	BFC Black Flexible Cord
	90	35K 3500K	H 347/480V	WH White	SF Slip Fitter	WFC White Flexible Cord
	110	4K 4000K			FLM 6 Flem 6	
		5K 5000K			FLM 10 Flem 10	

ARIUS SB						
-----------------	--	--	--	--	--	--

ACCESSORIES	PLUG
N None	N None
PC Photo Control	•See Plug Options
10kV 10kV Surge Protection	

--	--	--

NOTE

PC - Photo Control - Please specify voltage (120V, 208-277V, 347V, 480V)

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug
L5-15P - 125V 15A Locking Plug
5-20P - 125V AC 20A T-Slot Plug
L5-20P - 125V 20A Locking Plug
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15
L6-15P - 250V 15A Locking Plug
6-20P - 250V AC 20A Plug
L6-20P - 250V 20A Locking Plug
7-15P - 277V 15A 3W/2P NEMA 7-15 Plug
L7-15P - 277V 15A Locking Plug
7-20P - 277V AC 20A Plug
L7-20P - 277V 20A Locking Plug
24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L24-20P - 347V 20A Locking Plug
24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15