



Arius Wall Pack

Outdoor Area

FEATURES

- Cost effective LED replacement for traditional MH and HPS wall packs
- Standard and large body options
- Replace 60W mini packs to 300W large versions
- 6 Mil powder coating with all stainless steel fasteners
- Instant on with no delay or warm up period
- Wet locations rated
- Entire fixture sealed to conform to all outdoor rating requirements
- Optional Dark Sky compliant package option
- Qualifies for outdoor application rebates



SPECIFICATIONS

Efficacy:

Up to 114 Lm/W

CRI:

83

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

180,000+ Life Hours (L70)

Wattages:

30, 40, 60, 80, 100, 120

Voltage:

120/277V | 347V

480V - optional

Control Options:

0-10V Dimming

Operating Temperature:

-40°C to +40°C

Mounting Options:

Flush Mount

Accessories:

Photo Control

10kV Surge Protection

OUTPUT PERFORMANCE

Model	Description	Input Watts	Lm/W	Delivered Lumens
Arius WP 30	Dark Sky	33.5	90.8	3050
Arius WP 40	Dark Sky	44.3	87	3862
Arius WP 60	Dark Sky	65.9	79.5	5246

Model	Description	Input Watts	Lm/W	Delivered Lumens
AriusWP 30	Standard	34	114	3862
AriusWP 40	Standard	43	102.3	4399
AriusWP 60	Standard	65	99.1	6442
*AriusWP 80	Standard	80	110	8800
*AriusWP 100	Standard	100	110	11000
*AriusWP 120	Standard	121.4	112.5	13649

AriusWP 80, AriusWP 100, AriusWP 120 - Large Body Versions

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

delviro energy


94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018


Specifications subject to change without notice.

DIMENSIONS


Arius WP - Standard

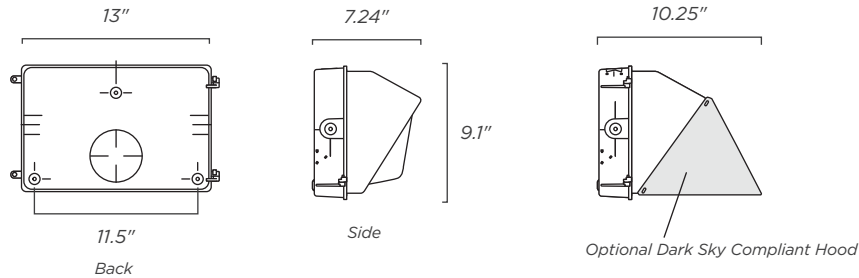

Arius WP - Large Body

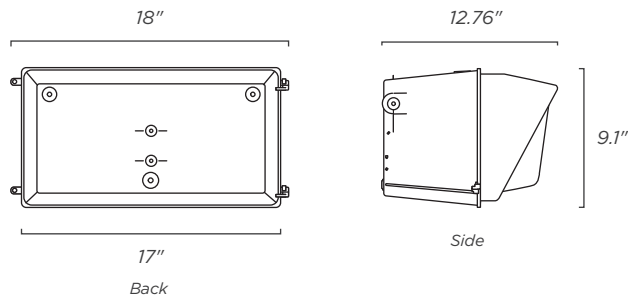

PHOTOMETRICS

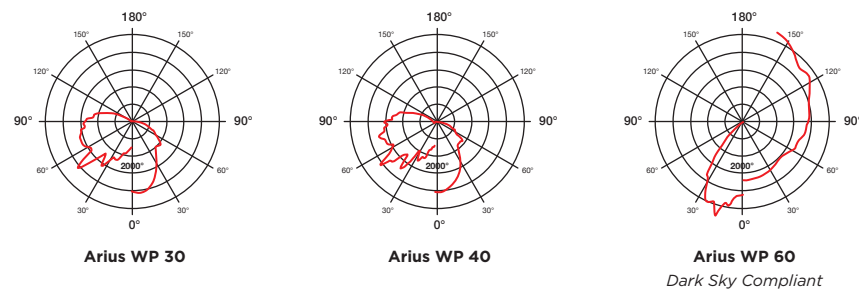

TRADITIONAL WALL PACK REPLACEMENT - PERFORMANCE

WP REPLACEMENT

MODEL	WATTS	HRS - Approx. Lumen Maintenance			
AriusWP 30	Up to 100W	25,000	50,000	75,000	100,000
AriusWP 40	Up to 150W	95%	90%	85%	>80%
AriusWP 60	300W				



delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	MOUNTING	ACCESSORIES
Arius WP	30	3K 3000K	U 120/277V	SBLK Black	FM Flush Mount	N None
	40	35K 3500K	H 347V	SBRZ Bronze		PC Photo Control
	60	4K 4000K	480V*	SWH White		10kV 10kV Surge Protection
	80*	5K 5000K		CU* Custom		
	100*					
	120*					

Arius WP					FM	
----------	--	--	--	--	----	--

REFLECTOR	PLUG
N None	N None
DSC Dark Sky Compliant Hood	*See Plug Options

--	--	--

NOTE
80W, 100W, 120W - Arius WP Large Body Versions 480V - Consult factory CU - Please consult factory PC - Photo Control - Please specify voltage (120V, 208 - 277V, 347V, 480V)

PLUG OPTIONS
5-15P - 125V 15A T-Slot Plug L5-15P - 125V 15A Locking Plug 5-20P - 125V AC 20A T-Slot Plug L5-20P - 125V 20A Locking Plug 6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15 L6-15P - 250V 15A Locking Plug 6-20P - 250V AC 20A Plug L6-20P - 250V 20A Locking Plug 7-15P - 277V 15A 3W/2P NEMA 7-15 Plug L7-15P - 277V 15A Locking Plug 7-20P - 277V AC 20A Plug L7-20P - 277V 20A Locking Plug 24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20 L24-20P - 347V 20A Locking Plug 24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.