



Arius WP Trapezoid

Outdoor Area

FEATURES

- Cost effective LED replacement for traditional MH and HPS wall packs
- Replace 60W mini packs to 300W large versions
- 6 Mil powder coating with all stainless steel fasteners
- Instant on with no delay or warm up period
- Wet locations rated
- Entire fixture sealed to conform to all outdoor rating requirements
- Dark Sky compliant
- Qualifies for outdoor application rebates
- IP 65



10 Year
Warranty

SPECIFICATIONS

Efficacy:

Up to 116 Lm/W

CRI:

80

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

180,000+ Life Hours (L70)

Wattages:

30, 40, 60

Voltage:

120/277V | 347V
480V - optional

Control Options:

0-10V Dimming

Operating Temperature:

-40°C to +40°C

Operating Temperature:

-40°C to +40°C

Mounting Options:

Flush Mount

Accessories:

Photo Control
10kV Surge Protection

OUTPUT PERFORMANCE

Model	Voltage	Input Watts	Lm/W	Delivered Lumens
Arius WPT 30	120/277V	30	110	3300
Arius WPT 40	120/277V	40	116.5	4660
Arius WPT 60	120/277V	60.7	114.2	6935

Model	Voltage	Input Watts	Lm/W	Delivered Lumens
Arius WPT 30	347V	30	105	3150
Arius WPT 40	347V	38.6	114.8	4437
Arius WPT 60	347V	57.7	107	6180

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com


© delviro energy 2018

Specifications subject to change without notice.

DIMENSIONS

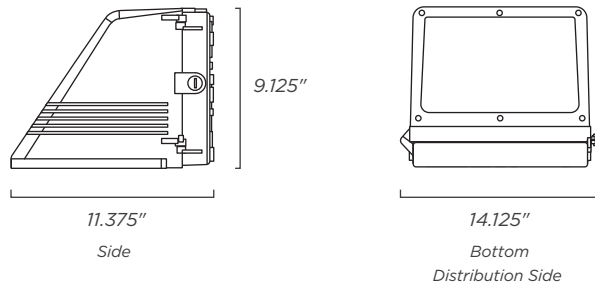

PHOTOMETRICS

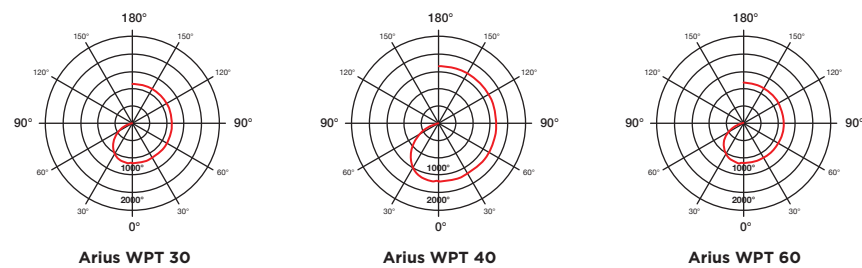

TRADITIONAL WALL PACK REPLACEMENT - PERFORMANCE

WP REPLACEMENT

MODEL	WATTS	HRS - Approx. Lumen Maintenance			
AriusWPT 30	Up to 100W	25,000	50,000	75,000	100,000
AriusWPT 40	Up to 150W	95%	90%	85%	>80%
AriusWPT 60	300W				



ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	MOUNTING	ACCESSORIES
Arius WPT	30	3K 3000K	U 120/277V	TBLK Black	FM Flush Mount	N None
	40	35K 3500K	H 347V	TBRZ Bronze		PC Photo Control
	60	4K 4000K	480V*	TWH White		10kV 10kV Surge Protection
		5K 5000K		CU* Custom		

Arius WPT					FM	
-----------	--	--	--	--	----	--

PLUG	
------	--

N None

•See Plug Options

--	--

NOTE

480V - Consult factory

CU - Please consult factory

PC - Photo Control - Please specify voltage (120V, 208 - 277V, 347V, 480V)

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug

L5-15P - 125V 15A Locking Plug

5-20P - 125V AC 20A T-Slot Plug

L5-20P - 125V 20A Locking Plug

6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15

L6-15P - 250V 15A Locking Plug

6-20P - 250V AC 20A Plug

L6-20P - 250V 20A Locking Plug

7-15P - 277V 15A 3W/2P NEMA 7-15 Plug

L7-15P - 277V 15A Locking Plug

7-20P - 277V AC 20A Plug

L7-20P - 277V 20A Locking Plug

24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20

L24-20P - 347V 20A Locking Plug

24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15