

Date:	Fixture:
Qty:	Client/ Project:



## Del Cove

Indirect

### FEATURES

- Up to 500 Lm/ft
- 1 foot modular design for curved or straight sections
- End to end wiring
- Snap connections
- No dark spots between fixtures
- LED pitch maintained throughout fixture
- No heat or cool beam from light source

**10** Year  
Warranty

### SPECIFICATIONS

**Efficacy:**

5W max per foot

**CRI:**

80  
90 Optional

**Color Temperature:**

3000K, 3500K, 4000K, 5000K

**Lumen Maintenance:**

200,000+ Life Hours (L70)


**Voltage:**

120/277V  
347V

**Operating Temperature:**


-20°C to +40°C

### DIMENSIONS

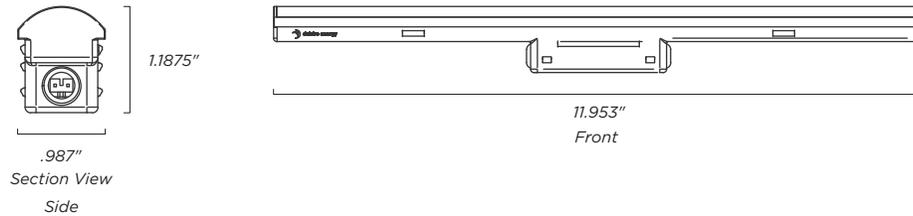


## MOUNTING

Adjustable Bracket




Mounting Track with Adjustable Bracket

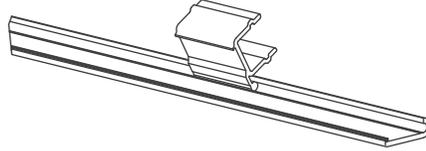


Surface Mounting



Delcove w/ Adjustable Bracket

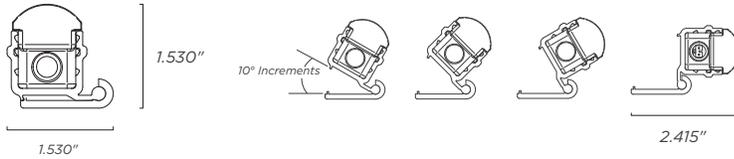

## TYPICAL SYSTEM LAYOUT

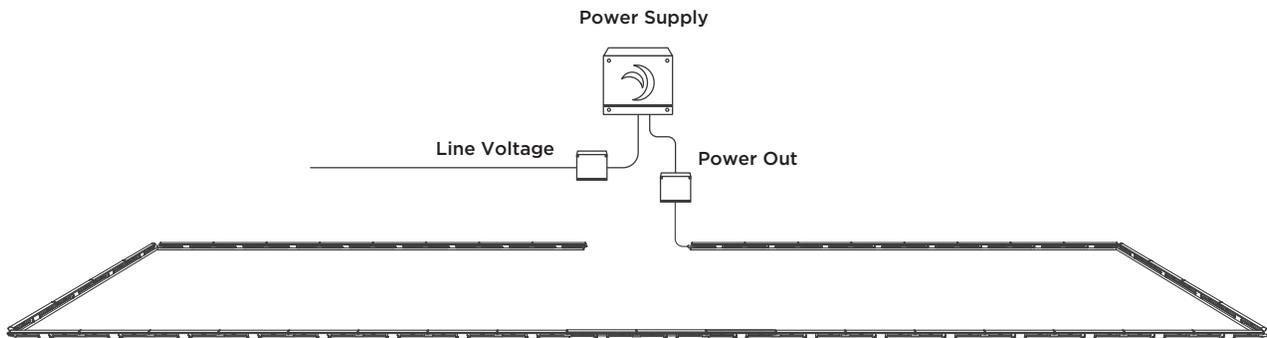

### delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com


© delviro energy 2018

Specifications subject to change without notice.

## CONNECTION

---

Connect adjacent units using supplied *FEMALE* / *MALE* connectors

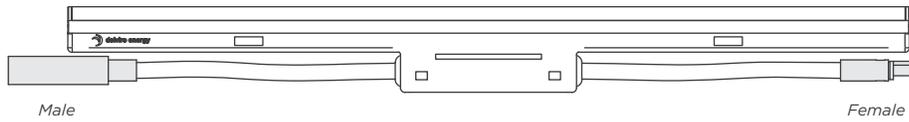


## END TO END WIRING

---



Connection Points 

Mounting Rail 



## EXTENSION WIRING HARNESS LENGTH OPTIONS

**STANDARD: 24" Increments**



## ORDERING GUIDE

MODEL	MODULES	COLOR TEMP	VOLTAGE	LENS	MOUNTING
<b>DelCove</b>	<b># of Modules</b>	<b>3K</b> 3000K <b>35K</b> 3500K <b>4K</b> 4000K <b>5K</b> 5000K	<b>U</b> 120/277V <b>H</b> 347V	<b>CL</b> Clear	<b>ASB</b> Adjustable Single Bracket <b>ATR</b> Adjustable Track <b>SU</b> Surface
<b>DELCOVE</b>				<b>CL</b>	
<b>EWH24 LENGTH</b>			<b>ENVIRONMENT</b>		
__ <b>EWH24</b> # of Extension Wiring Harness 24" Length			<b>DD</b> Dry and Damp		
			<b>DD</b>		