

Date:	Fixture:
Qty:	Client/ Project:



## DelSnap

### Troffer Fixture

#### FEATURES

- LED Troffer
- Steel construction
- Frosted lens
- Easy Lay-in installation
- General ceiling light applications



**10** Year  
Warranty

#### SPECIFICATIONS

**Efficacy:**

Up to 139 Lm/W

**CRI:**

83+

**Color Temperature:**

3000K, 3500K, 4000K, 5000K

**Lumen Maintenance:**

180,000+ Life Hours (L70)

**Voltage:**

120/277V | 347V

**Control Options:**

0-10V Dimming

**Operating Temperature:**

-40°C to +40°C

**Mounting Options:**

T Bar

**Wiring Options:**

Black, White Flexible Cord

**Accessories:**

Occupancy Sensor  
10kV Surge Protection

#### OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
Delsnap 1x4 20	20.5	139.1	2,850
Delsnap 1x4 30	29.8	137.3	4,095
Delsnap 1x4 40	39.6	137.3	5,431

Model	Watts	Lm/W	Delivered Lumens
Delsnap 2x2 20	20.8	133	2,769
Delsnap 2x2 30	32.9	129.1	4,249
Delsnap 2x2 40	46.1	122.1	5,629

Model	Watts	Lm/W	Delivered Lumens
Delsnap 2x4 30	27.8	139	3,858
Delsnap 2x4 40	37.7	130.6	4,928
Delsnap 2x4 60	59.5	122.4	7,286

**Note:** Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**delviro energy**



94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | [info@delviro.com](mailto:info@delviro.com) | [www.delviro.com](http://www.delviro.com)

© delviro energy 2018



Specifications subject to change without notice.

## DIMENSIONS



**DelSnap Troffer 1x4**

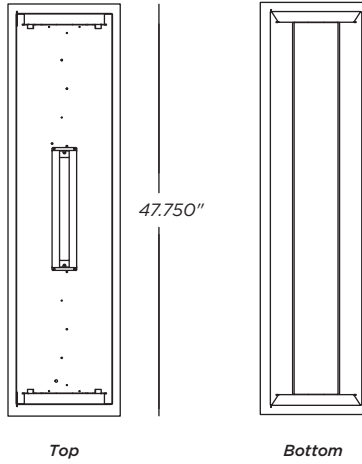

**DelSnap Troffer 2x4**

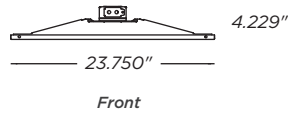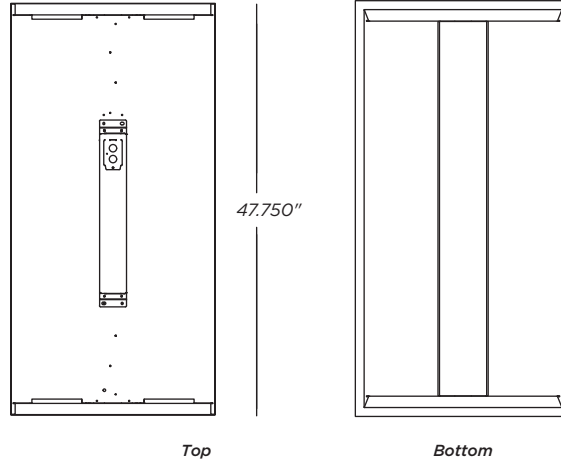

**DelSnap Troffer 2x2**

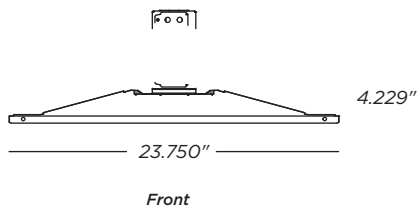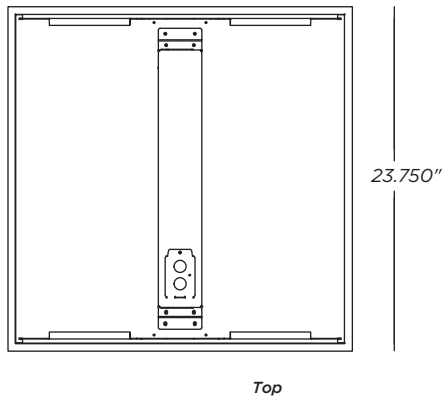

**delviro energy**

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

## ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
<b>DelSnap 1x4</b>	<b>20, 30 40</b>	<b>3K</b> 3000K	<b>U</b> 120/277V	<b>NL</b> Normal Frosted Lens (standard)	<b>WH</b> White	<b>T BAR</b> T Bar
<b>DelSnap 2x2</b>	<b>20, 30, 40</b>	<b>35K</b> 3500K	<b>H</b> 347V			
<b>DelSnap 2x4</b>	<b>30, 40, 60</b>	<b>4K</b> 4000K <b>5K</b> 5000K				

WIRING	ACCESSORIES	PLUG
<b>BFC</b> Black Flexible Cord <b>WFC</b> White Flexible Cord	<b>N</b> None <b>OCC</b> Occupancy Sensor (on/off) <b>10kV</b> 10kV Surge Protection <b>EM</b> Emergency Battery	<b>N</b> None <b>+See Plug Options</b>

**NOTE**

**OCC** - Consult Factory

PLUG OPTIONS
<b>5-15P</b> - 125V 15A T-Slot Plug
<b>L5-15P</b> - 125V 15A Locking Plug
<b>5-20P</b> - 125V AC 20A T-Slot Plug
<b>L5-20P</b> - 125V 20A Locking Plug
<b>6-15P</b> - 250V AC 15A 3W/2P Plug NEMA 6-15
<b>L6-15P</b> - 250V 15A Locking Plug
<b>6-20P</b> - 250V AC 20A Plug
<b>L6-20P</b> - 250V 20A Locking Plug
<b>7-15P</b> - 277V 15A 3W/2P NEMA 7-15 Plug
<b>L7-15P</b> - 277V 15A Locking Plug
<b>7-20P</b> - 277V AC 20A Plug
<b>L7-20P</b> - 277V 20A Locking Plug
<b>24-20P</b> - 347V AV 20A 3W/2P Plug NEMA 24-20
<b>L24-20P</b> - 347V 20A Locking Plug
<b>24-15P</b> - 347V AC 15A 3W/2 Plug NEMA 24-15