



Thinline 2.25

Surface Mount

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com

www.delviro.com

Date:	Fixture:
Qty:	Client/ Project:



Thinline 2.25

Surface Mount

FEATURES

- Aluminum housing 2.25" wide
- Lengths: 2', 4', 6', 8'
- Continuous runs options
- Polycarbonate frosted lens
- Motion sensor compatible
- Standard Grey, White and Black finishes
- Custom finishes available



10 Year
Warranty

SPECIFICATIONS

Efficacy:

98 Lm/W

CRI:

80+

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120/277V | 347V

Control Options:

0-10V Dimming, DMX, DALI, Wireless

Operating Temperature:

-20°C to +40°C

Mounting Options:

Surface

Wiring Options:

Black, White, Grey Flexible Cord,
3 and 5 Conductor Wire

Accessories:

10kV Surge Protection,
0-10 1% Dim to Off Driver

OUTPUT PERFORMANCE

Watts/ft	Delivered Lumens/ft
2.5	250
3.5	350
5	500
7.5	750
10	1000

Custom Output Packages

Step 1:

Select Model:

2', 4', 6', 8'

Step 2:

Select:

Watts/ft - Delivered lumens/ft

Sample Output Package: Thinline 8', 10W/ft - 1000 Delivered lumens/ft
yields: 80W and 8000 Lumens

* *Watts per foot available on all lengths*

MAX LINEAR FT

Model	Feet
120V	120
240V	240
277V	250
347V	250

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/gpl.


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com


© delviro energy 2018

Specifications subject to change without notice.

DIMENSIONS



2.25"
Section View




2': 24" / 4': 48" / 6': 72" / 8': 96"
Side


Note: End Cap Length: .09" | 2 End Caps add additional .180" in length

SURFACE MOUNT INSTALLATION

2" x 4" Junction box must be installed in ceiling surface

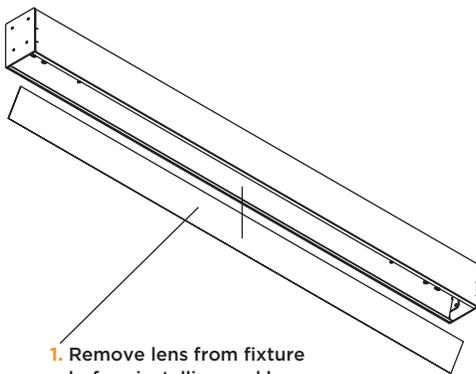

1. Remove lens from fixture before installing and keep in a safe place.

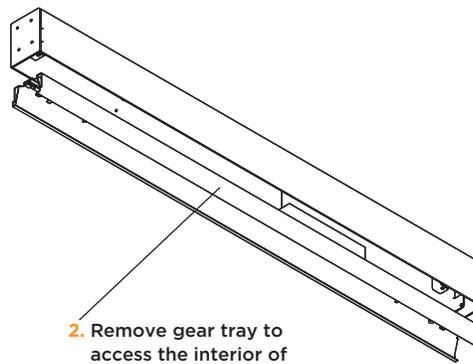

2. Remove gear tray to access the interior of the enclosure.

delviro energy



94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018


Specifications subject to change without notice.

SURFACE MOUNT INSTALLATION

3. Connect fixture wires to ceiling power wires.

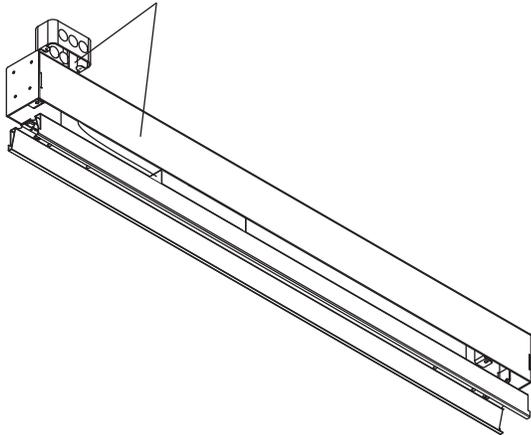



4. Attach fixture to surface using the correct #1/4 screws at the location shown.

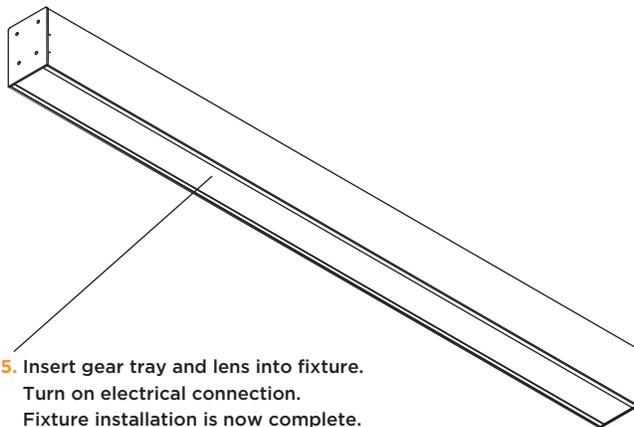

5. Insert gear tray and lens into fixture.
Turn on electrical connection.
Fixture installation is now complete.

WALL MOUNT INSTALLATION

1. Mark the wall using the wall mount brackets (distance indicated below, can be with 1/2").
2. Mount wall brackets (hardware not supplied).
3. Hook fixture onto wall brackets.
4. Secure using #8 - 32 screw provided.

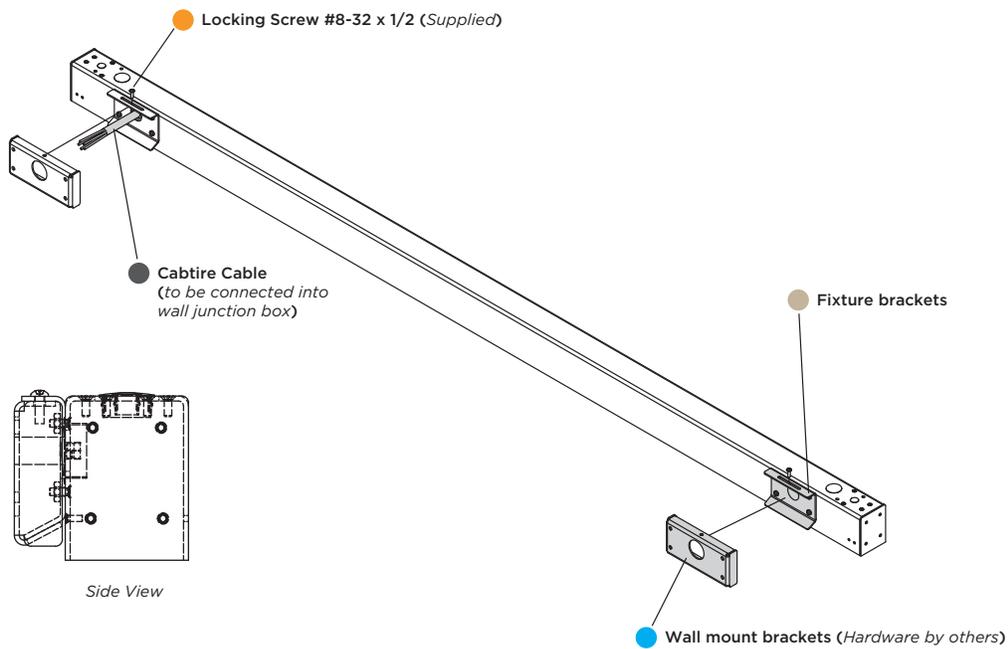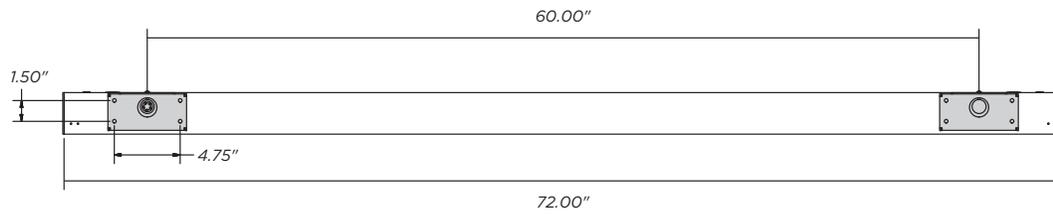

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

FINISH OPTIONS




GREY
Standard Finish



WHITE
Standard Finish



BLACK
Standard Finish




ORANGE
Custom Finish



RED
Custom Finish



BLUE
Custom Finish



GOLD
Custom Finish

ADDITIONAL FINISHES AVAILABLE

Please contact delviro.com for more information

ORDERING GUIDE

MODEL	WATTS/ft	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
DTL2	2.5	3K 3000K	U 120/277V	FR Frosted	GRY Grey	SM Surface Mount
DTL4	3.5	35K 3500K	H 347V		WH White	WM Wall Mount
DTL6	5	4K 4000K			BLK Black	
DTL8	7.5	5K 5000K			CU Custom	
DTLCR	10					

				FR		
--	--	--	--	-----------	--	--

WIDTH	WIRING	ACCESSORIES	TYPE	CUSTOM LENGTHS (DTLCR)
2.25 2.25"	BFC Black Flexible Cord WFC White Flexible Cord GFC Grey Flexible Cord 3 WIRE 3 Conductor Wire ___ 5 WIRE 5 Conductor Wire ___ N No Cord	N None WC Wireless Controls DMX DALI 10kV 10kV Surge Protection DIMOFF 0-10 1% Dim to off Driver	SU Surface	Specify Length Must be 2' Increments Greater than 10'

2.25			SU	
-------------	--	--	-----------	--

NOTE
DTLCR - Continuous Run - Specify Custom Lengths, consult factory CU - Please consult factory