



Thinline 2.25

T-Grid

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com

www.delviro.com



Thinline 2.25

T-Grid

FEATURES

- Aluminum housing 2.25" wide
- Recessed T-Grid
- Lengths: 2', 4', 6', 8'
- Continuous runs available - 4', 6', 8' versions
- Polycarbonate frosted lens



SPECIFICATIONS

Efficacy:

98 Lm/W

CRI:

80+

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120/277V | 347V

Control Options:

0-10V Dimming, DMX, DALI, Wireless

Operating Temperature:

-20°C to +40°C

Mounting Options:

T-Grid

Wiring Options:

Black, White, Grey Flexible Cord,
3 and 5 Conductor Wire

Accessories:

10kV Surge Protection,
0-10 1% Dim to Off Driver

OUTPUT PERFORMANCE

Watts/ft	Delivered Lumens/ft
2.5	250
3.5	350
5	500
7.5	750
10	1000

Custom Output Packages

Step 1:

Select Model:

2', 4', 6', 8'

Step 2:

Select:

Watts/ft - Delivered lumens/ft

Sample Output Package: Thinline 8', 10W/ft - 1000 Delivered lumens/ft

yields: 80W and 8000 Lumens

** Watts per foot available on all lengths*

MAX LINEAR FT

Model	Feet
120V	120
240V	240
277V	250
347V	250

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com


© delviro energy 2018

Specifications subject to change without notice.

DIMENSIONS

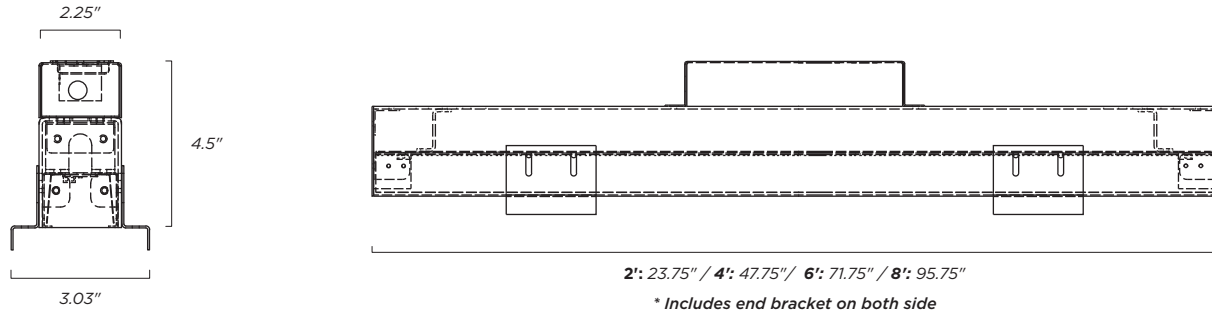

T-GRID INSTALLATION

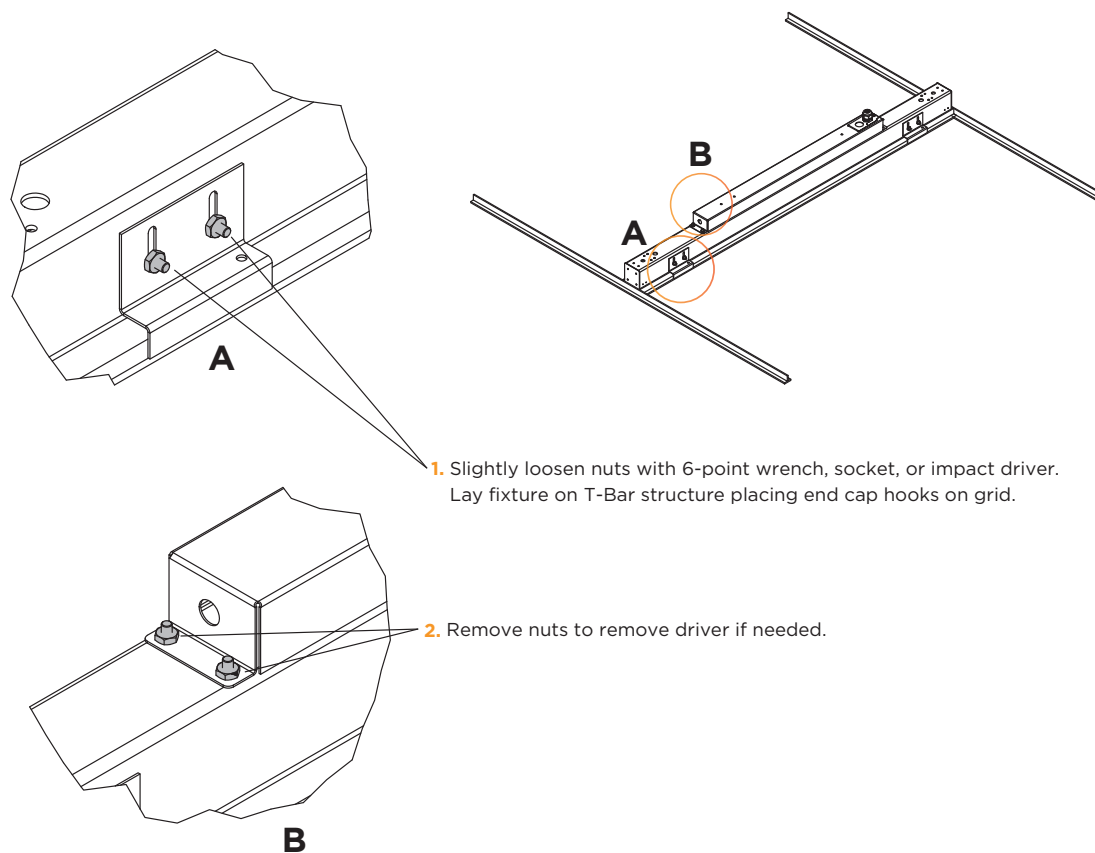


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com


© delviro energy 2018

Specifications subject to change without notice.


T-GRID INSTALLATION

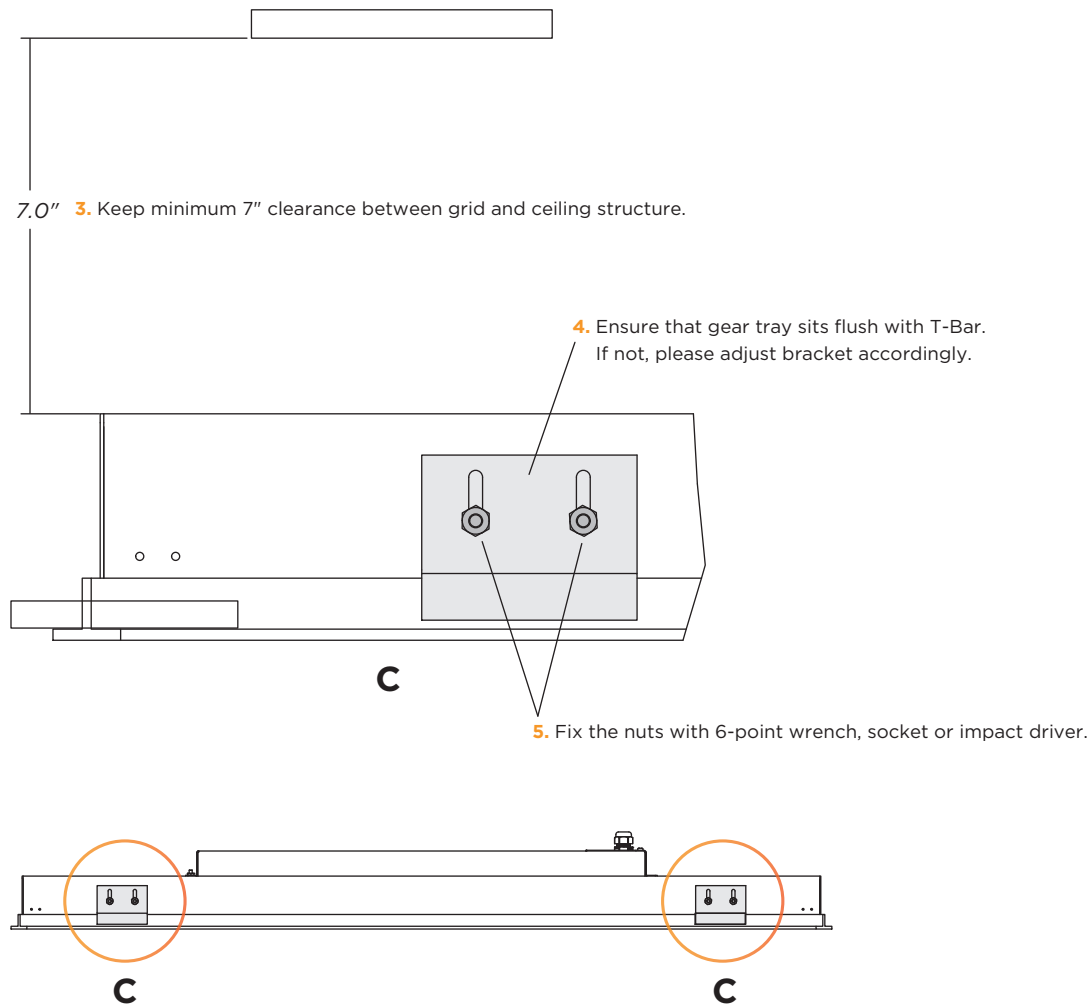

T-GRID CONTINUOUS RUN

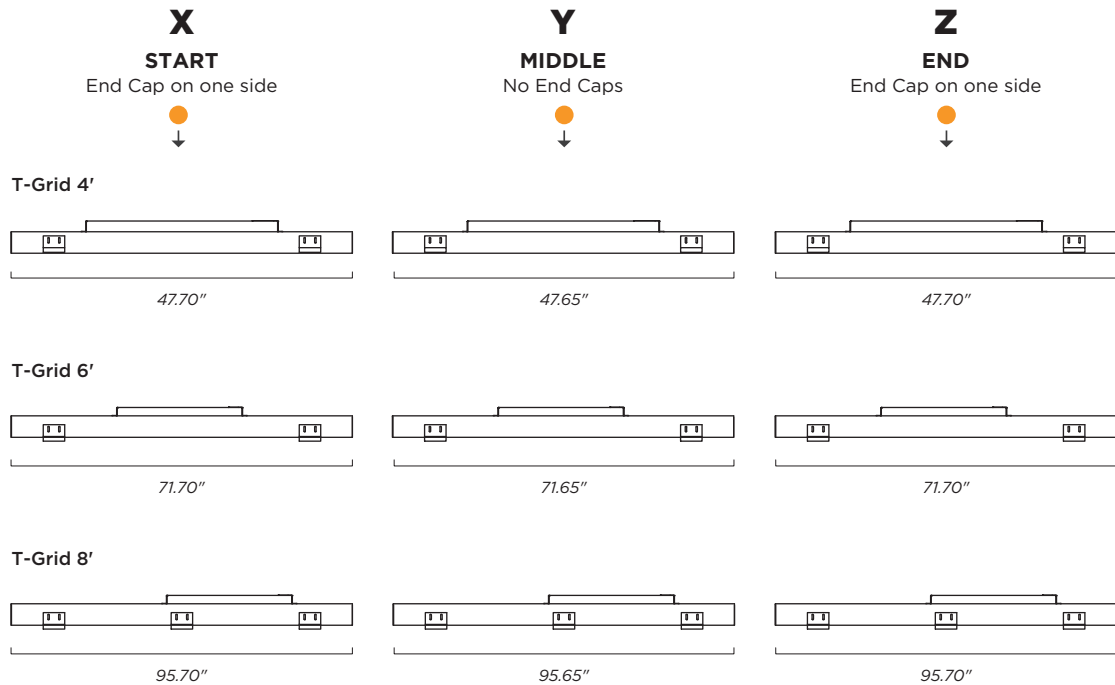

T-GRID CONTINUOUS COUPLING

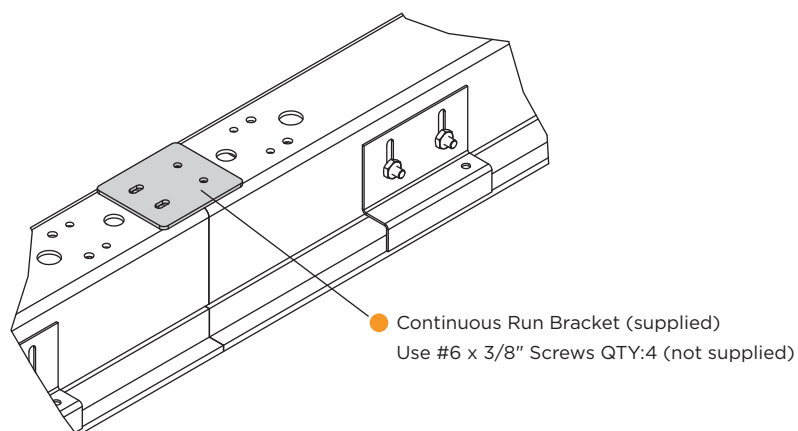

ORDERING GUIDE

MODEL	WATTS/ft	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
DTL2	2.5	3K 3000K	U 120/277V	FR Frosted	WH White	TG T-Grid
DTL4	3.5	35K 3500K	H 347V		CU Custom	
DTL6	5	4K 4000K				
DTL8	7.5	5K 5000K				
DTLCR	10					

				FR		TG
--	--	--	--	-----------	--	-----------

WIDTH	WIRING	ACCESSORIES	TYPE	CUSTOM LENGTHS (DTLCR)
2.25 2.25"	BFC Black Flexible Cord WFC White Flexible Cord GFC Grey Flexible Cord 3 WIRE 3 Conductor Wire ___ 5 WIRE 5 Conductor Wire ___ N No Cord	N None WC Wireless Controls DMX DALI 10kV 10kV Surge Protection DIMOFF 0-10 1% Dim to off Driver	T-GRID T-Grid	Specify Length Must be 2' Increments Greater than 10'

2.25			T-GRID	
-------------	--	--	---------------	--

NOTE

DTLCR - Continuous Run - Specify Custom Lengths
CU - Please consult factory