



Thinline Arch

Suspended Direct

Product Features

- Aluminum housing
- Lengths: 4', 6', 8'
- Polycarbonate frosted lens
- Standard Grey, White and Black finishes
- Custom finishes available
- Designed and manufactured in North America

10Year
Warranty

Specifications

Efficacy:

75 Lm/W

CRI:

80+

Color Temperature:

3000K, 3500, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120/277V | 347V

Mounting Options:

Suspended - Aircraft Cable

Control Options:

0-10V Dimming, DMX, DALI,
Wireless

Operating Temperature:

-20°C to +40°C

Wiring Options:



Black, White, Grey Flexible
Cord, 3 and 5 Conductor Wire

Output Performance

Watts/ft - Delivered Lumens/ft

2.5	187.5
3.5	262.5
5	375
7.5	562.5
10	750
15	1,125

Dimensions

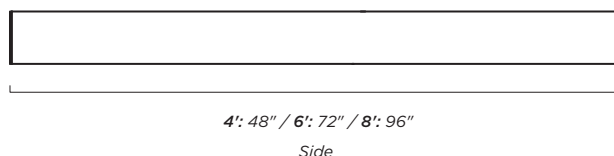

delviro energy


94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018


Specifications subject to change without notice.

Finish Options

Standard



GREY



WHITE



BLACK

Custom



ORANGE



RED



BLUE



GOLD

ADDITIONAL FINISHES AVAILABLE

Please consult factory

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

Ordering Guide

MODEL	WATTS per Foot	LENGTH	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
DTL	2.5	4'	3K 3000K	U 120/277V	FR Frosted	GRY Grey	AC Aircraft Cable
	3.5	6'	35K 3500K	H 347V		WH White	
	5	8'	4K 4000K			BLK Black	
	7.5		5K 5000K			*CU Custom	
	10						
	15						
DTL					FR		AC
WIRING		CONTROLS		TYPE			
BFC	Black Flexible Cord	N	None	ARCH Arch			
WFC	White Flexible Cord	DALI					
GFC	Grey Flexible Cord	DMX					
3 WIRE	3 Conductor Wire __	10kV	10kV Surge Protection				
5 WIRE	5 Conductor Wire __						
N	No Cord						
				ARCH			
NOTE							
CU - Please Consult Factory							