



Thinline BLTL

Suspended Direct

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com

www.delviro.com



Thinline BLTL

Suspended Direct

FEATURES

- Aluminum housing
- Length: 2'
- 3 and 4 fixture combination options
- Polycarbonate lens
- Frosted lens
- Grey and white finish options

10 Year
Warranty

SPECIFICATIONS

Efficacy:

Up to 107 Lm/W

CRI:

80+

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120/277V | 347V | 480V (option)

Control Options:

0-10V Dimming, DMX, DALI, Wireless

Operating Temperature:

-20°C to +40°C

Mounting Options:

Pendant Mount

Wiring Options:

Black, White, Grey Flexible Cord,
3 and 5 Conductor Wire

Accessories:

10kV Surge Protection,
0-10 1% Dim to Off Driver



OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
BLTL 3	40	105	4200
	60	98	5800



Model	Watts	Lm/W	Delivered Lumens
BLTL 4	40	107	4280
	60	105	6300
	80	98	7840

DIMENSIONS

BLTL 3

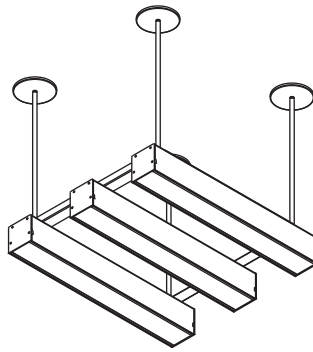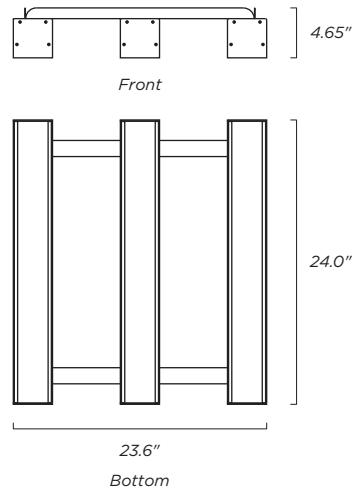

BLTL 4

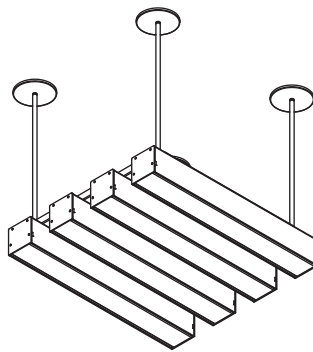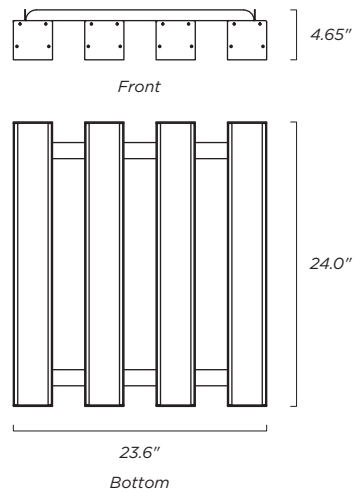

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
DTL BLTL 3	40	3K 3000K	U 120/277V	FR Frosted	GRY Grey	PM Pendant Mount
	60	35K 3500K	H 347V		WH White	
DTL BLTL 4	40	4K 4000K	480V			
	60	5K 5000K				
	80					

WIRING	ACCESSORIES
BFC Black Flexible Cord	N None
WFC White Flexible Cord	WC Wireless Controls
GFC Grey Flexible Cord	DMX
3 WIRE 3 Conductor Wire ___	DALI
5 WIRE 5 Conductor Wire ___	10kV 10kV Surge Protection
N No Cord	DIMOFF 0-10 1% Dim to off Driver

NOTE
480V - Please consult factory CU - Please consult factory