



ThinLine 2.25

LED Extrusion | Indirect Distribution

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com

www.delviro.com



Thinline 2.25

Indirect | Extrusion

FEATURES

- Aluminum extrusion
- Indirect light distribution
- Width: 2.25"
- Lengths: 2', 4', 6', 8'
- Polycarbonate frosted lens
- Black, white, grey finishes
- Custom finishes available



10 Year
Warranty

SPECIFICATIONS

Efficacy:

100 Lm/W

CRI:

80+

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120/277V | 347V

Control Options:

0-10V Dimming, DMX, DALI, Wireless

Operating Temperature:

-20°C to +40°C

Mounting Options:

Aircraft Cable


Wiring Options:

Black, White, Grey Flexible Cord,
3 and 5 Conductor Wire

Accessories:

10kV Surge Protection,
0-10 1% Dim to Off Driver

DIMENSIONS

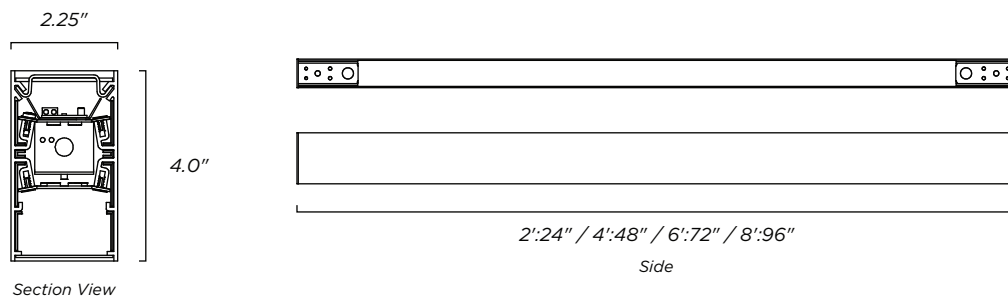

NOTE: End cap Thickness = 0.100". Add additional two End cap thickness of 0.200" to Length

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

PERFORMANCE TABLE

Output

Watts/ft - Delivered Lumens/ft

2.5	250
3.5	350
5	500
7.5	750
10	1000
12.5	1250

Custom Output Packages

Step 1: Select Model:
2', 4', 6', 8'

Step 2: Select:
Watts/ft - Delivered lumens/ft

Sample Output Package: Thinline 8', 10W/ft - 1000 Delivered lumens/ft yields: 80W and 8000 Lumens

* Watts per foot available on all lengths

Model	Watts/ft	Delivered Lumens/ft	Lm/w	Watts	Delivered Lumens
DTL 2'	2.5	250	100	5	500
	3.5	350	100	7	700
	5	500	100	10	1000
	7.5	750	100	15	1500
	10	1000	100	20	2000
	12.5	1250	100	25	2500

Model	Watts/ft	Delivered Lumens/ft	Lm/w	Watts	Delivered Lumens
DTL 4'	2.5	250	100	10	1000
	3.5	350	100	14	1400
	5	500	100	20	2000
	7.5	750	100	30	3000
	10	1000	100	40	4000
	12.5	1250	100	50	5000


Model	Watts/ft	Delivered Lumens/ft	Lm/w	Watts	Delivered Lumens
DTL 6'	2.5	250	100	15	1500
	3.5	350	100	21	2100
	5	500	100	30	3000
	7.5	750	100	45	4500
	10	1000	100	60	6000
	12.5	1250	100	75	7500

Model	Watts/ft	Delivered Lumens/ft	Lm/w	Watts	Delivered Lumens
DTL 8'	2.5	250	100	20	2000
	3.5	350	100	28	2800
	5	500	100	40	4000
	7.5	750	100	60	6000
	10	1000	100	80	8000
	12.5	1250	100	100	10000

NOTE:


- LPW is with Frosted Lens

INSTALLATION: MOUNTING LOCATIONS

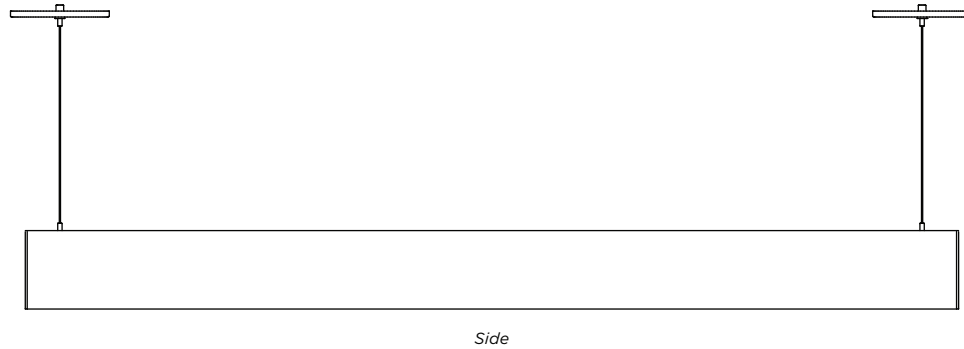

A: Mounting Locations


B: AC Power Locations

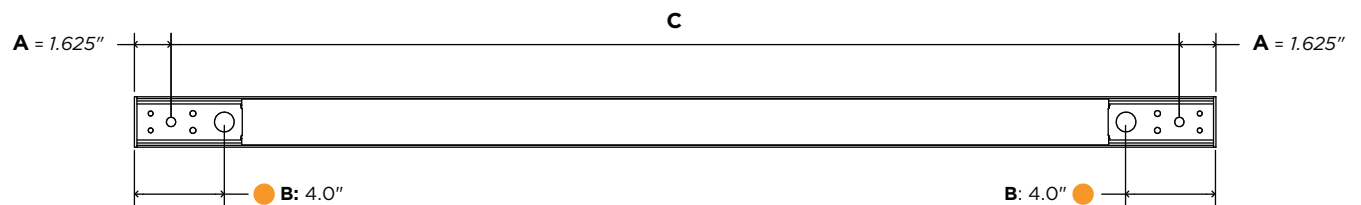

Aircraft Cable Mounting Locations

Models	Mounting Lengths C
2'	20.95"
4'	44.95"
6'	68.95"
8'	92.95"


FINISH OPTIONS




 **GREY**
Standard Finish




 **WHITE**
Standard Finish




 **BLACK**
Standard Finish




 **ORANGE**
Custom Finish



 **RED**
Custom Finish



 **Blue**
Custom Finish



 **GOLD**
Custom Finish

ADDITIONAL FINISHES AVAILABLE

Please contact delviro.com for more information

ORDERING GUIDE

MODEL	WATTS/ft	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
DTL2	2.5	3K 3000K	U 120/277V	FR Frosted	GRY Grey	AC Aircraft Cable
DTL4	3.5	35K 3500K	H 347V		WH White	
DTL6	5	4K 4000K			BLK Black	
DTL8	7.5	5K 5000K			CU Custom	
	10					
	12.5					
				FR		AC

WIDTH	WIRING	ACCESSORIES	TYPE	DISTRIBUTION	
2.25 2.25"	BFC Black Flexible Cord WFC White Flexible Cord GFC Grey Flexible Cord 3 WIRE 3 Conductor Wire ___ 5 WIRE 5 Conductor Wire ___ N No Cord	N None WC Wireless Controls DMX DALI 10kV 10kV Surge Protection DIMOFF 0-10 1% Dim to off Driver	EXTR Extrusion	IND Indirect	
2.25			EXTR	IND	

NOTE

CU - Please consult factory