

Date	Fixture
Qty	Client

Lumenova PT

Outdoor Area Post Top

Features

Post Style Fixture
 Aluminum extrusion
 Polycarbonate protective lens
 Fits 4" square pole or 2.375" OD Tenon



Specifications

Efficacy	120 Lm/W
Color Temp.	4000K, 5000K
Lumen Maintenance	200,000+ Life Hours (L70)
Voltage	120/277V 347V
Operating Temp.	-40°C to +40°C
Mounting Options	Post Top
Certifications	cULus

Output Performance

MODELS	Input Watts	Lm/W	Delivered Lumens
Lumenova 60	60	120	7,200
Lumenova 80	80	120	9,600
Lumenova 120	120	120	14,400

Specifications subject to change without notice.



delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8



10 Year
Warranty




info@delviro.com

1.877.502.3434

delviro.com

Dimensions

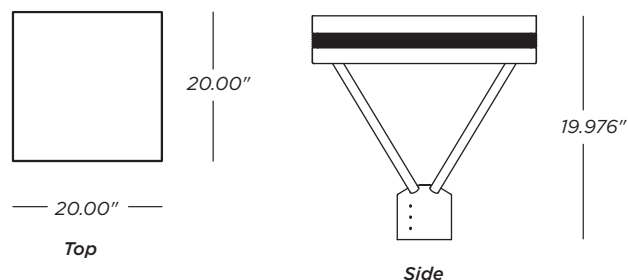

Ordering Guide

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	MOUNTING	ACCESSORIES	TYPE	SIZE
Lumenova	60	4K 4000K	U 120/277V	WH White	PT Post Top	PHC Photocell	POST TOP	LRG Large
	80	5K 5000K	H 347V	BLK Black				
	120							
Lumenova					PT	PHC	POST TOP	LRG