



Lumenova

Outdoor Area

FEATURES

- Cobra Head Style Fixture
- Aluminum and Steel construction
- Powder coat finish
- Corrosion proof
- Wet location rated



10 Year
Warranty

SPECIFICATIONS

Efficacy:

Up to 117 Lm/W

CRI:

84

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

180,000+ Life Hours (L70)

Watts:

10W, 15W, 20W, 40W, 60W, 80W
90W, 120W, 150W, 300W

Voltage:

120V, 120/277V | 347/480V

Control Options:

0-10V Dimming

Operating Temperature:

-40°C to +40°C

Mounting Options:

U Bracket, Slip Fitter, Flem 6, Flem 10

Wiring Options:

Black Flexible Cord
White Flexible Cord

Accessories:

Photo Control, 10kV Surge Protection

OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
Lumenova 10	10	95	950
Lumenova 15	15	100	1500
Lumenova 20	20	100	2000
Lumenova 40	37.7	110.8	4174
Lumenova 60	58.7	111.3	6545
Lumenova 80	79.7	111.8	8917
Lumenova 90	83.1	117	9723
Lumenova 120	125	109.6	13698
Lumenova 150	152.8	115.7	17673
Lumenova 300	305.4	107.8	32902

Note:

Lumenova 300 (Lumenova 150x2)
Lumenova 10, 15, 20 - 120V
Lumenova 40 - 120/277V, 347V

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

delviro energy



94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

DIMENSIONS

Lumenova 120, 150

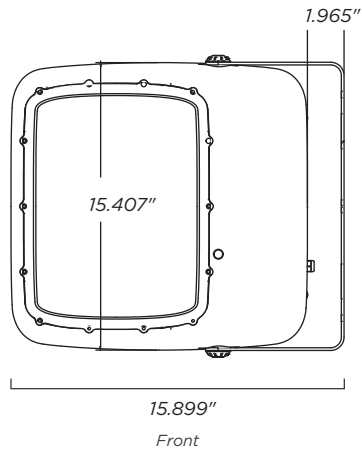


Lumenova 10 / 15 / 20:

7.874" x 6.692" x 1.771"

Lumenova 40 / 60 / 80:

13.385" x 12.598" x 1.968"

Lumenova 300: Lumenova 150 x 2

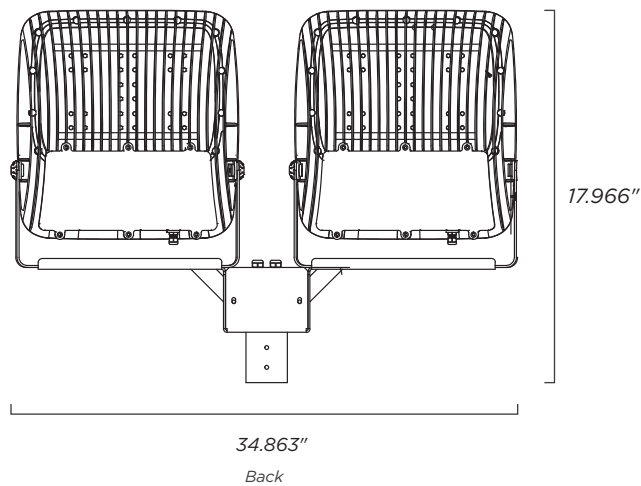

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018


Specifications subject to change without notice.

MOUNTING OPTIONS


Standard Attachment Bracket - U Bracket




Slip Fitter

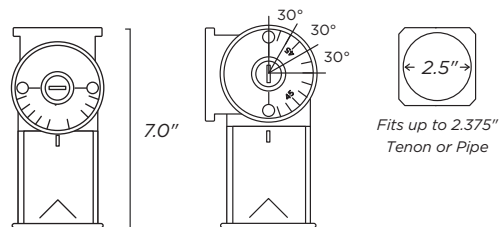

Flem 6", 10"

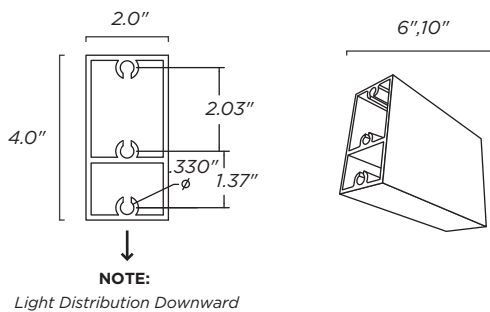

Lumenova D - Holding Bracket



delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	FINISH	MOUNTING	WIRING
Lumenova	10, 15, 20, 40, 60, 80, 90, 120, 150, 300	3K 3000K 35K 3500K 4K 4000K 5K 5000K	U 120/277V H 347/480V 120V	BLK Black	UB U Bracket SF Slip Fitter FLM6 Flem 6 FLM10 Flem 10	BFC Black Flexible Cord WFC White Flexible Cord
Lumenova				BLK		

ACCESSORIES	PLUG
N None PC Photo Control (on/off) 10kV 10kV Surge Protection	N None •See Plug Options

NOTE

UB - Standard mounting
PC - Photo Control - please specify voltage (120V, 208 - 277V, 347V, 480V)

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug
L5-15P - 125V 15A Locking Plug
5-20P - 125V AC 20A T-Slot Plug
L5-20P - 125V 20A Locking Plug
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15
L6-15P - 250V 15A Locking Plug
6-20P - 250V AC 20A Plug
L6-20P - 250V 20A Locking Plug
7-15P - 277V 15A 3W/2P NEMA 7-15 Plug
L7-15P - 277V 15A Locking Plug
7-20P - 277V AC 20A Plug
L7-20P - 277V 20A Locking Plug
24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L24-20P - 347V 20A Locking Plug
24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15