

Date:	Fixture:
Qty:	Client/ Project:



2-Ring Ceiling Light

FEATURES

- Contemporary style
- 2 size options
- Cutting edge LED technology and efficiency
- Requires no maintenance or bulb replacement
- Instant on with no delay or warm up period
- Commercial, multi-residential, dormitories, hotel and retail applications



SPECIFICATIONS

Efficacy:

110 Lm/W

CRI:

80

Color Temperature:

2700K, 3000K, 3500K,
4000K, 5000K

Lumen Maintenance:

60,000+ Life Hours (L70)

Watts:

15W, 20W, 30W

Voltage:

120V, 240V, 277V, 347V

Mounting Options:

Flush Mount


Accessories:

0-10V Dimming (standard 30W),
Triac Dimming (15W, 20W),
0-10 1% Dim to Off Driver

OUTPUT PERFORMANCE

Models	Input Watts	Lm/W	Delivered Lumens
RIL1212-7KST-2RING 15	13	110	1430
RIL1212-7KST-2RING 20	21	110	2310
RIL1212-7KST-2RING 30	32	110	3520

DIMENSIONS

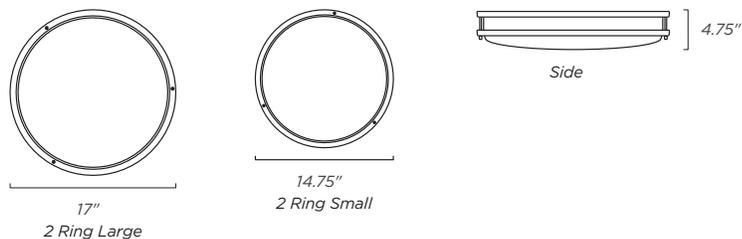

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	SIZE	FINISH	MOUNTING	ACCESSORIES	
RIL1212-7KST-2RING	15	27K	2700K	120V	SM Small	WH White	FM Flush Mount	N None
	20	3K	3000K	240V	LRG large			TD Triac Dimming
	30	35K	3500K	277V				10D 0-10V Dimming
		4K	4000K	347V				DIMOFF 0-10 1% Dim to off Driver
		5K	5000K					
RIL1212-7KST-2RING					WH	FM		

NOTE

TD - Triac Dimming (15W and 20W)

10D - 0 - 10V Dimming - 30W standard | Please consult factory for 15W and 20W versions